TERRI LONG
LANDSCAPE
DESIGN
828.299.2399

GENERAL NOTES:

1. REFER TO ATTACHED "PLANT LISTS" FOR PLANT SPECIFICATIONS AND QUANTITIES. OWNER WILL PLANT PERENNIALS IN FRONT.

2. THIS IS AN EXISTING LANDSCAPE WITH LIMITED ACCESS TO THE BACK. TAKE PRECAUTIONS TO PROTECT HARDSCAPING AND PLANTS. REPAIR DAMAGE TO LAWN RESULTING FROM CONSTRUCTION ACTIVITIES THAT CANNOT BE AVOIDED.

3. THIS PLAN WAS CREATED FROM LANDSCAPE PLAN SUPPLIED BY OWNER AND SUPPLEMENTAL FIELD DIMENSIONS TAKEN BY LANDSCAPE DESIGNER. EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY OF THE PLAN; HOWEVER, THERE MAY BE VARIATIONS FROM ACTUAL CONDITIONS. PLAN DOES NOT INDICATE TOPOGRAPHICAL CONTOURS AND DOES NOT REFLECT ALL PLANTS ON SITE. VERIFY DIMENSIONS ON SITE PRIOR TO FINALIZING QUANTITY TAKE-OFFS.

4. PLANT SIZES ON PLAN INDICATE APPROXIMATE MATURE SIZE.

5. CONTRACTOR SHALL COORDINATE HAVING UTILITIES MARKED BY LOCATOR SERVICE PRIOR TO STARTING INSTALLATION.

6. LANDSCAPE DESIGNER WILL REVIEW AND ADJUST LOCATIONS OF ALL PLANTS PRIOR TO INSTALLATION. EXACT PLACEMENT OF PLANTS MAY BE ADJUSTED SLIGHTLY IN THE FIELD DUE TO SITE CONDITIONS, SLOPES AND VIEWS.

7. CHECK SOIL MOISTURE BEFORE PLANTING BY SQUEEZING A HANDUL OF SOIL. IF IT STAYS IN A BALL WHEN RELEASED, SOIL IS TOO WET FOR PLANTING. DELAY UNTIL THIS DOESN'T HAPPEN.

8. FOR AZALEAS, RHODODENDRONS, AND OTHER ERICACEOUS PLANTS, PLANT WITH ROOTBALL AT LEAST HALFWAY ABOVE FINISHED GRADE, AND THEN MOUND AMENDED SOIL UP AROUND SIDES OF ROOTBALL. MULCH AND WATER THOROUGHLY.

9. INSTALL SHREDDED HARDWOOD BARK MULCH TO NEWLY PLANTED BEDS: 2" THICK, AVERAGE, IN PERENNIAL BEDS AND 3" THICK, AVERAGE, IN SHRUB BEDS. BLEND MULCH INTO ADJACENT WOODLAND EDGES.

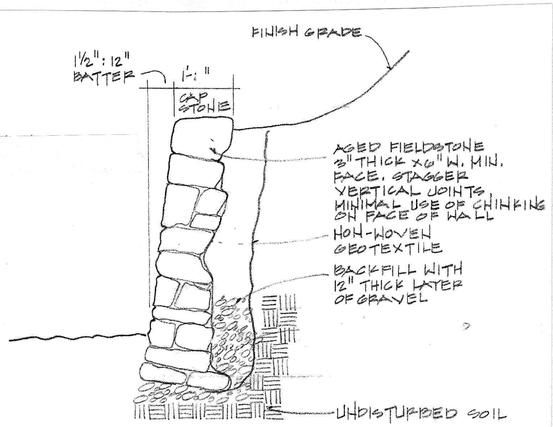

SECTION - STONE WALL
3/4" = 1'-0"

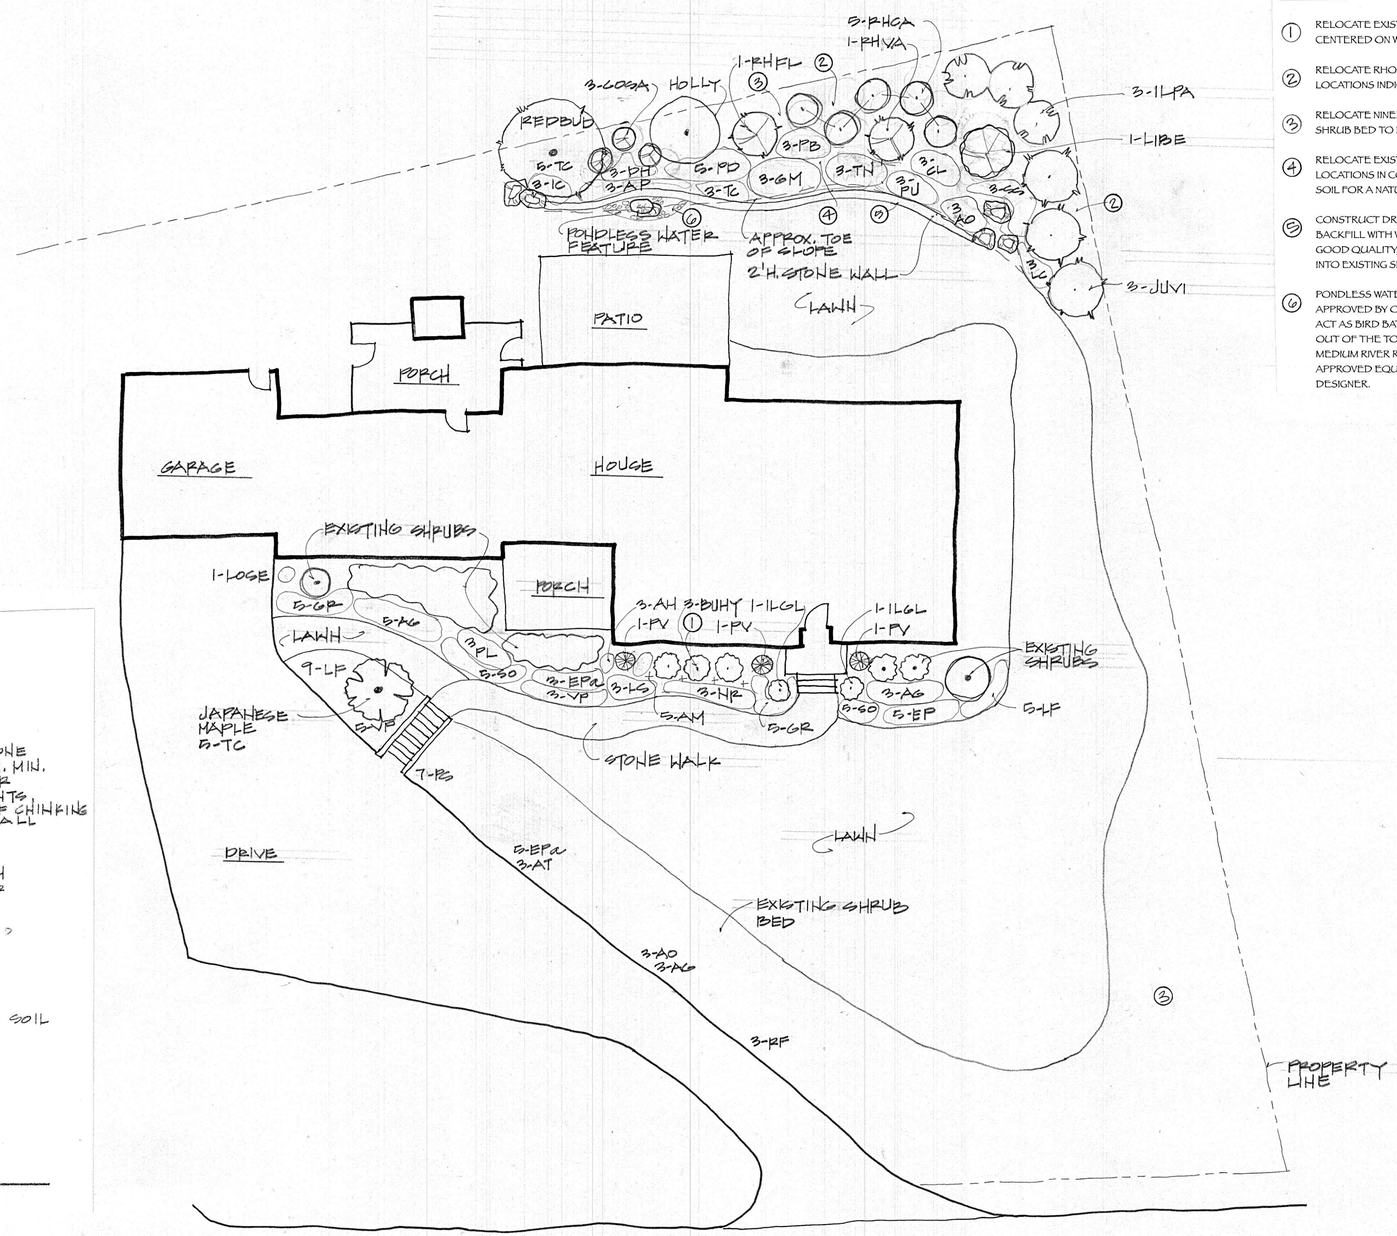

PLAN NOTES:

1. RELOCATE EXISTING BOXWOOD IN FRONT FOUNDATION BED TO BE CENTERED ON WALL AND EQUALLY SPACED 5' O.C.

2. RELOCATE RHODODENDRONS AND TWO NATIVE AZALEAS TO LOCATIONS INDICATED ON PLAN AND VERIFIED BY DESIGNER.

3. RELOCATE NINEBARK AND ONE BLACK CHOKEBERRY TO FRONT SHRUB BED TO LOCATIONS DETERMINED ON SITE WITH DESIGNER.

4. RELOCATE EXISTING ROCK OUTCROPPINGS ON BACK SLOPE TO NEW LOCATIONS IN COORDINATION WITH DESIGNER. EMBED BOULDERS IN SOIL FOR A NATURAL LOOK.

5. CONSTRUCT DRY STACK STONE WALL, APPROXIMATELY 2' HIGH. BACKFILL WITH WASHED STONE TO WITHIN 12" OF TOP OF WALL AND GOOD QUALITY, WEED-FREE AMENDED FILL SOIL. TIE NEW GRADE INTO EXISTING SLOPE FOR A SMOOTH TRANSITION.

6. POND-LESS WATER FEATURE USING SMALL BOULDER TO BE APPROVED BY OWNER & DESIGNER AND SHALLOW STONE AT BASE TO ACT AS BIRD BATH. DRILL HOLE IN BOULDER SO THAT WATER FLOWS OUT OF THE TOP AND INTO SHALLOW STONE. CONCEAL BASIN WITH MEDIUM RIVER ROCK. AQUASCAPE AQUABASIN SMALL, OR APPROVED EQUAL. COORDINATE ELECTRICAL REQUIREMENTS WITH DESIGNER.

LANDSCAPE PLAN
2.1.23
WHITHORTH / WHITNEY'S GARDEN
25 PARK ROAD, BILTMORE FOREST, NC