### PROPOSED AGENDA

Thursday, September 23, 2021 5:30 p.m.

### Meeting of the Design Review Board

- I. Chairman Johnson will call the meeting to order.
- II. Review and Approval of Minutes from July 29, 2021 and September 2, 2021.
- III. Design Review Board Presentations
  - 1. 51 Hilltop Road –Roof-mounted solar panel installation
  - 2. 3 Stuyvesant Crescent Renovation to Existing Home
  - 3. 414 Vanderbilt Road Construction of New Single-Family Residence

Projects 1 & 3 received special use permit approval from the Board of Adjustment at the Monday, September 20, 2021 meeting. Project 2 received approval for a variance to exceed the maximum roof coverage by approximately 4% at the September 20, 2021 meeting.

- IV. Next Meeting Thursday, October 21, 2021
- V. Adjourn

MINUTES OF THE TOWN OF BILTMORE FOREST DESIGN REVIEW BOARD MEETING OF JULY 29, 2021

Those in attendance:

Mr. Jonathan Kanipe, Town Manager

Mr. Bruce Johnson, Chairman

Ms. Gay Coleman

Mr. Tony Saponaro

The first matter discussed was regarding 31 Stuyvesant Road at the Biltmore Forest

Country Club. Mr. Mike Beatty, architect, reviewed plans and elevations for the building.

The new structures will have slate roofing and stucco which would blend in with the existing

facility. The tennis court design was also described. The building changed a bit over time

from when the fitness facility was first drawn. There will be an entrance created for ADA

compliance in the basement area, which faces the golf course. There will be a new fitness

facility, which moves to the upper level. It will be attractive from all sides of the building.

Ms. Gay Coleman asked about the slide going into the pool and it going into areas

not as deep. Mr. Beatty said the slide specified is a slide for smaller children. The slide is

very small with several turns and mostly elementary age and younger. Mr. Beatty said this

is not a large slide.

Mr. Allen Peele who also represents the Country Club project said the elevation of

the pool in that area is 3-4 feet and the slide is designed for smaller kids.

They are scheduled to start the project the day after Labor Day. Between the two

structures, the total square footage is approximately 17,000. The main building is

approximately 8,000 square feet per level. The other building is much smaller with some pool equipment below.

Mr. Kip Warlick said they have told the members they will likely not have the pool open next year. They are hoping the tennis courts will be in place.

Mr. Tony Saponaro told Mr. Clay Mooney that he is very pleased with the project overall. Mr. Saponaro said there are 5-6 large trees coming out to remove the tennis court. Mr. Saponaro said he would like to see some larger trees planted back in this area. Mr. Mooney said there are some limitations with utilities and met requirements for the tree protection ordinance. Mr. Mooney said it is difficult to plant many large trees when one is trying not to disturb the area in question. There is a possibility the final landscaping plan may include some areas adjacent to Stuyvesant Road. Mr. Mooney said everything likes sunlight so he is not necessarily wanting to plant within the canopy and shade areas because the trees could not grow and thrive well in this area. Mr. Saponaro mentioned some specific varieties of large trees and replanting with a Japanese maple. Mr. Saponaro added this is a tree that will fill and grow in the space. He also said there is another large locust that is leaning over the tennis court and suggested that area to be a filler. Mr. Mooney said a water line was relocated and storm drain lines as well to avoid the impact of the trees.

Mr. Johnson asked when they submit the final landscape plan. Mr. Mooney and Mr. Kanipe said the landscaping plan approval was done by the Board of Adjustment this past Monday.

Mr. Saponaro questioned about the line going through #8. Mr. Michael Cain said there is a sewer service going through this area.

Ms. Coleman asked where the access road would be for the heavy equipment. Mr. Cain showed the board a gravel pattern going in from the circle in front of the club. It will go in through the current road and court #1. Mr. Allen said the upper tennis courts are

sacrificial so they can get into the wooded area from the backside rather than cutting an alley to get into the area. Most of the demo equipment will stay on the pool deck area.

Mr. Saponaro said they would drive in through the front entrance, go into the scoreboard stand and drive straight through there by #11. Ms. Coleman asked how this would affect golfing. Mr. Warlock said the cart path is seven feet and they have constructed an area to land everything. The plan is to put a fence with fabric on it. The turret will be an open air turret and is to get stairs up into the top for observation from swimming and tennis courts.

The project was approved by the Board.

The next project is 1095 Hendersonville Road driveway project cutting through the back. Mr. Mooney said this is a much better idea. The project was approved by the Board.

The final project is 23 Eastwood Road. There were questions regarding tree removal at 23 Eastwood Road. Mr. Saponaro understood that some trees need to come down. The change will be overall materially better for coverage and removing asphalt that is bad for the drainage. Overall, it is a good idea but his main concern is moving the driveway farther left and taking out four very large trees, including the three white oaks and a tulip poplar tree. Mr. Saponaro thinks with some flexibility, there may be an ability to keep them. From a construction standpoint, it would be much easier to remove.

There was discussion about the tree canopy and measurement for figuring out how far the roots go and keeping the trees in place.

The project was approved.

The meeting was adjourned at 6:10pm. The next Design Review Board meeting is scheduled for Thursday, September 2, 2021.

Bruce Johnson, Chairman	Laura Jacobs, Town Clerk

MINUTES OF THE TOWN OF BILTMORE FOREST

DESIGN REVIEW BOARD MEETING OF SEPTEMBER 2, 2021

Those in attendance:

Mr. Jonathan Kanipe, Town Manager

Mr. Bruce Johnson, Chairman

Ms. Gay Coleman

Mr. Tony Saponaro

Mr. Art Garst

Chairman Bruce Johnson called the meeting to order at 5:30pm on Thursday, September 2, 2021.

The first matter discussed was a driveway redesign request for a new residence at 15 Eastwood Road. Mr. Matt Zink discussed the project. The existing driveway will be used as a construction entrance. The approximate time for construction will take four months. The driveway is within the setbacks. The plantings in the front entrance will be replaced with new shrubbery.

The project at 15 Eastwood was approved.

The next matter discussed was at 5 White Oak Road for a circular drive addition. The driveway will be made from concrete and gravel. There will be brick pavers for edging. There are also some screening bushes proposed. The aesthetics of the house will be greatly improved. Mr. Johnson asked if there would be mud mats installed which is required per Town Ordinance. This information will be passed on to the contractor.

The project was approved.

The next project discussed was 377 Vanderbilt Road for a carport shed on an existing detached garage. This house is on a half-acre lot. The detached garage was built in 1928 and is very inconvenient. A shed roof carport would be added to the side of it. The same materials will be used which was on the entryway. The garage would be used for inside parking. There is no change to the current structure other than the door.

The project was approved.

The next project was 32 Hilltop Road for roof-mounted solar panel installation for a new residence. The solar panels would be on the rear of the house and not visible from the road. It would be a black on black panel.

The project was approved.

The next project discussed was for 6 Stuyvesant Road, which was a request for a rear yard deer fence installation. There will be brown posts and it will stand eight foot tall. It will be 2x3 square and galvanized. They got a Variance from the Board of Adjustment because they have heavy landscaping and got approval regarding the setbacks.

The project was approved.

The next project was at 8 White Oak Road for a circular drive addition and an addition of a second level sunroom and small deck over an existing covered porch. They are under their allowance for pervious and impervious surface coverage. They will be using water permeable pavers. The driveway was already approved by the Board of Adjustment. Ten trees will be removed but plantings will be replaced. The driveway will be asphalt. The existing masonry garden wall will be replaced.

The project was approved.

Bruce Johnson, Chairman Laura Jacob	os. Town Clerk
Board meeting is scheduled for Thursday, September 23, 20	21.
Chairman Johnson adjourned the meeting at 6:14	pm. The next Design Review
The project was approved.	
to the living room and the kitchen.	a, mmen requested an addition
The last project discussed was for 14 Southwood Roa	nd which requested an addition
The project was approved.	
The next project discussed was 15 White Oak Road, we shed roof over an existing stone patio. It will be located on t	•

## **Zoning Compliance Application**

Town of Biltmore Forest

Name

Stephen Miller

**Property Address** 

51 Hilltop Road Biltmore Forest NC 28803

**Phone** 

(828) 712-0672

**Email** 

smiller@gen-span.com

Parcel ID/PIN Number

964664329700000

ZONING INFORMATION

**Current Zoning** 

R-1

Lot Size 1.68 acres

**Maximum Roof Coverage** 

2,874 square feet (Up to .5 acres)

Proposed Roof Coverage Total

Maximum Impervious Surface Coverage

Up to 1 acre (27.5 percent of lot area)

**Proposed Impervious Surface Coverage** 

0

**Front Yard Setback** 

60 feet (R-1 District)

Side Yard Setback 20 feet (R-1 District)

**Rear Yard Setback** 

25 feet (R-1 District)

**Building Height** 

0

**Description of the Proposed Project** 

Rooftop Solar Installation 11.84kW(32 panels)

**Estimated Start Date** 

**Estimated Completion Date** 

10/31/2021

**Estimated Cost of Project** 

\$23,680.00

10/1/2021

**Supporting Documentation (Site Plan, Drawings, Other Information)** 

TSP93362 Eng Letter.pdf

TSP93362 Plans.pdf

## **Special Use Permit Application**

Town of Biltmore Forest

### Name

Stephen Miller

### **Address**

51 Hilltop Road Biltmore Forest NC 28803

**Phone** 

(828) 712-0672

**Email** 

smiller@gen-span.com

### Please select the type of special use you are applying for:

Accessory Structures

The applicant must show that the proposed use will not materially endanger public health or safety or injure value of adjoining or abutting property. In addition, the proposed use must be in general conformity with the plan of development of the town and be in harmony with scale, bulk, height, coverage, density, and character of the neighborhood.

### Please provide a description of the proposed project:

Rooftop Solar Installation 11.84kW(32 panels)

Explain why the project would not adversely affect the public interest of those living in the neighborhood:

Proposed project is solar panels on roof of home.

I hereby certify that all of the information set forth above is true and accurate to the best of my knowledge.

Signature

**Date** 8/26/2021

#### SCOPE OF WORK:

TO INSTALL A ROOF MOUNTED SOLAR PHOTOVOLTAIC SYSTEM AT THE OWNER RESIDENCE LOCATED AT 51 HILLTOP ROAD BILTMORE FOREST, NC 28803.

THE POWER GENERATED BY THE PV SYSTEM WILL BE INTERCONNECTED WITH THE UTILITY GRID THROUGH THE EXISTING ELECTRICAL SERVICE EQUIPMENT.

THE PV SYSTEM DOES NOT INCLUDE STORAGE BATTERIES

EQUIPMENT SUMMARY
-------------------

32 LG ELECTRONICS LG370Q1C-V5 MODULES

01 SOLAREDGE SE10000H-US INVERTER

32 SOLAREDGE POWER OPTIMIZER P370

### **GENERAL NOTES:**

- THESE CONSTRUCTION DOCUMENTS HAVE BEEN BASED ON FIELD INSPECTIONS AND OTHER INFORMATION AVAILABLE AT THE TIME. ACTUAL FIELD CONDITIONS MAY REQUIRE MODIFICATIONS IN CONSTRUCTION DETAILS.
- ARCHITECT HAS NOT BEEN RETAINED TO SUPERVISE ANY CONSTRUCTION OR INSTALLATION OF ANY EQUIPMENT AT SITE.
- CONTRACTOR SHALL FURNISH ALL LABOR, MATERIAL, EQUIPMENT, TOOLS, OBTAINS ALL PERMITS, LICENSES AND PAY ALL REQUIRED FEES AND COMPLETE INSTALLATION.
- CONTRACTOR HAS THE FULL RESPONSIBILITY TO CHECK AND VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS. ANY DISCREPANCIES SHALL BE REPORTED TO THE ENGINEER BEFORE PROCEEDING WITH THE WORK. ANY WORK STARTED BEFORE CONSULTATION AND ACCEPTANCE BY THE ENGINEER SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR AND SHALL BE SUBJECT TO CORRECTION BY THEM WITHOUT ADDITIONAL
- DAMAGE CAUSED TO THE EXISTING STRUCTURE, PIPES, DUCTS, WINDOWS, WALL FLOORS, ETC. SHALL BE REPAIRED TO THE ORIGINAL CONDITION OR REPLACED BY THE CONTRACTOR AT NO ADDITIONAL COST
- THE CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THE PROPER INSTALLATION AND COMPLETION OF THE WORK WITH APPROVED MATERIALS.
- NO CHANGES ARE TO BE MADE WITHOUT THE CONSULTATION AND APPROVAL OF THE **ARCHITECT**
- CONTRACTOR SHALL OBTAIN BULDING PERMIT. NO WORK TO START UNLESS BUILDING PERMIT IS PROPERLY DISPLAYED.
- ALL WORKMANSHIP AND MATERIALS SHALL BE OF FIRST QUALITY AND IN COMPLIANCE WITH THE REQUIREMENTS OF THE NC BUILDING CODE, THE DEPARTMENT OF ENVIRONMENTAL PROTECTION AND ALL PERTINENT AGENCIES.
- IT IS ESSENTIAL THAT ALL WORK PROCEED WITH THE MAXIMUM COOPERATION OF ALL PARTIES AND WITH MINIMUM INTERFERENCE TO THE OCCUPANTS WITHIN THE BUILDING. THE OWNER'S DIRECTIONS IN THIS REGARD SHALL BE FULLY COMPLIED WITH
- ALL EXPOSED PLUMBING, HVAC, ELECTRICAL DUCTWORK, PIPING AND CONDUITS ARE TO BE PAINTED BY GENERAL CONTRACTOR.
- THE CONTRACTOR SHALL PERFORM THE WORK IN STRICT CONFORMANCE WITH THE LOCAL LAWS, REGULATIONS AND THE NATIONAL ELECTRIC CODE.
- THE CONTRACTOR SHALL OBTAIN ALL PERMITS, APPROVALS, AFFIDAVITS, CERTIFICATIONS, ETC. AND PAY ALL FEES AS REQUIRED BY THE LOCAL AUTHORITIES.
- CONTRACTORS SHALL OBTAIN FIRE CERTIF. UPON COMPLETION OF WORK.

### **ELECTRICAL NOTES:**

- THE EQUIPMENT AND ALL ASSOCIATED WIRING AND INTERCONNECTION SHALL BE INSTALLED ONLY BY QUALIFIED PEOPLE. A QUALIFIED PERSON IS ONE WHO HAS SKILLS AND KNOWLEDGE RELATED TO THE CONSTRUCTION AND OPERATION OF THE ELECTRICAL EQUIPMENT AND INSTALLATIONS AND HAS RECEIVED SAFETY TRAINING TO RECOGNIZE AND AVOID THE HAZARDS INVOLVED. (NEC 690.4(E) AND 705.6)
- LOCAL UTILITY PROVIDER SHALL BE NOTIFIED PRIOR TO USE AND ACTIVATION OF ANY SOLAR PHOTOVOLTAIC INSTALLATION. FOR A LINE SIDE TAP CONNECTION, UTILITY NEEDS TO BE NOTIFIED WELL IN ADVANCE TO COORDINATE BUILDING ELECTRICAL SHUT OFF.
- NEW CONDUIT ROUTING SHOWN IS ESSENTIALLY SCHEMATIC. SUBCONTRACTOR SHALL LAY OUT RUNS TO SUIT FIELD CONDITIONS AND THE COORDINATION REQUIREMENTS OF OTHER TRADES.
- ARRAY WIRING SHOULD NOT BE READILY ACCESSIBLE EXCEPT TO QUALIFIED PERSONNEL
- ALL EXTERIOR CONDUIT, FITTINGS, AND BOXES SHALL BE WATERTIGHT AND APPROVED FOR USE IN WET LOCATIONS. (NEC 314.15A)
- WIRING METHODS FOR PV SYSTEM CONDUCTORS AREN'T PERMITTED WITHIN 10 IN. OF THE ROOF DECKING OR SHEATHING EXCEPT WHERE LOCATED DIRECTLY BELOW THE ROOF SURFACE THAT'S COVERED BY PV MODULES AND ASSOCIATED EQUIPMENT WIRING
- BACK-FED BREAKER MUST BE AT THE OPPOSITE END OF BUS BAR FROM THE MAIN BREAKER OR MAIN LUG SUPPLYING CURRENT FROM THE UTILITIES.
- ALL CONDUCTORS AND WIRE TIES EXPOSED TO SUNLIGHT ARE LISTED AS UV RESISTANT.
- CONTRACTOR SHALL FOLLOW ALL ELECTRICAL EQUIPMENT LABELING REQUIREMENTS IN NEC 690 AND IFC 2015
- MEASURE THE LINE-TO-LINE AND LINE-TO-NEUTRAL VOLTAGE OF ALL SERVICE ENTRANCE CONDUCTORS PROIR TO INSTALLING ANY SOLAR EQUIPMENT. THE VOLTAGES FOR THE 240VAC RATED.

### **GOVERNING CODES**

2017 NATIONAL ELECTRICAL CODE 2018 INTERNATIONAL FIRE CODE 2018 INTERNATIONAL BUILDING CODE 2018 INTERNATIONAL RESIDENTIAL CODE

2018 INTERNATIONAL ENERGY CONSERVATION CODE

2018 INTERNATIONAL EXISTING BUILDING CODE

2018 INTERNATIONAL SWIMMING POOL AND SPA CODE

2018 UNIFORM MECHANICAL CODE 2018 UNIFORM PLUMBING CODE

AUTHORITY HAVING JURISDICTION (AHJ): BILTMORE FOREST TOWN

### WIRING AND CONDUIT NOTES:

- ALL CONDUIT SIZES AND TYPES, SHALL BE LISTED FOR ITS PURPOSE AND APPROVED FOR THE SITE APPLICATIONS
- ALL PV CABLES AND HOMERUN WIRES BE #10AWG \*USE-2, PV WIRE, OR PROPRIETARY SOLAR CABLING SPECIFIED BY MFR, OR EQUIVALENT; ROUTED TO SOURCE CIRCUIT COMBINER **BOXES AS REQUIRED**
- ALL CONDUCTORS AND OCPD SIZES AND TYPES SPECIFIED ACCORDING TO [NEC 690.8 (A)(1) & (B)(1)], [NEC 240] [NEC 690.7] FOR MULTIPLE CONDUCTORS
- ALL PV DC CONDUCTORS IN CONDUIT EXPOSED TO SUNLIGHT SHALL BE DERATED ACCORDING TO [NEC TABLE 310.15 (B)(2)(C)] BLACK ONLY\*\*
- EXPOSED ROOF PV DC CONDUCTORS SHALL BE USE-2, 90°C RATED, WET AND UV RESISTANT, AND UL LISTED RATED FOR 600V, UV RATED SPIRAL WRAP SHALL BE USED TO PROTECT WIRE FROM SHARP EDGES
- PHASE AND NEUTRAL CONDUCTORS SHALL BE DUAL RATED THHN/THWN-2 INSULATED, 90°C RATED, WET AND UV RESISTANT, RATED FOR 600V PER NEC 2008 OR 1000V PER **NEC 2011**
- 4-WIRE DELTA CONNECTED SYSTEMS HAVE THE PHASE WITH THE HIGHER VOLTAGE TO GROUND MARKED ORANGE OR **IDENTIFIED BY OTHER EFFECTIVE MEANS**
- ALL SOURCE CIRCUITS SHALL HAVE INDIVIDUAL SOURCE **CIRCUIT PROTECTION**
- VOLTAGE DROP LIMITED TO 2% FOR DC CIRCUITS AND 1% FOR AC CIRCUITS
- NEGATIVE GROUNDED SYSTEMS DC CONDUCTORS SHALL BE COLOR CODED AS FOLLOWS: DC POSITIVE - RED (OR MARKED RED), DC NEGATIVE - GREY (OR MARKED GREY)
- POSITIVE GROUNDED SYSTEMS DC CONDUCTORS COLOR CODED: DC POSITIVE - GREY (OR MARKED GREY), DC NEGATIVE - BLACK (OR MARKED BLACK)
- AC CONDUCTORS >4AWG COLOR CODED OR MARKED: PHASE A OR L1- BLACK, PHASE B OR L2- RED, PHASE C OR L3- BLUE. **NEUTRAL-WHITE/GRAY**

51 Hilltop Rd, Biltmore Forest, NC 28803, USA

PROJECT SITE

(64) VICINITY MAP SCALE: NTS

(280)

Mills River

**SYSTEM RATING** 11.84 KWDC 10.0 KWAC

	SHEET INDEX			
PV-0	COVER PAGE			
PV-1	SITE PLAN			
PV-2	ROOF PLAN & MODULES			
PV-2A	STRING LAYOUT & BOM			
PV-3	ATTACHMENT DETAIL			
PV-3A	ATTACHMENT DETAIL			
PV-4	ELECTRICAL LINE DIAGRAM & CALCS.			
PV-4A	ELECTRICAL LINE DIAGRAM & CALCS.			
PV-4B	SPECIFICATIONS & NOTES			
PV-5	SIGNAGE			
PV-6	JOB SAFETY PLAN			
PV-7+	EQUIPMENT SPECIFICATIONS			



**HOUSE PHOTO** 



### TITAN SOLAR POWER

210 N Sunway Dr, Gilbert, AZ 85233 www.titansolarpower.com

ELECTRICAL LIC#: U.33714

REVISIONS				
DESCRIPTION	DATE	REV		
REVISION	08/24/2021	Α		

Signature with Sea

DATE: 08/24/2021

PROJECT NAME & ADDRESS

28803 EPHEN MILLER

ROAD 067 SIDENCE 51 HILLTOP RC BILTMORE FOREST, PH NO.

S


SHEET NAME **COVER PAGE** 

SHEET SIZE

**ANSI B** 11" X 17"

SHEET NUMBER

PV-0

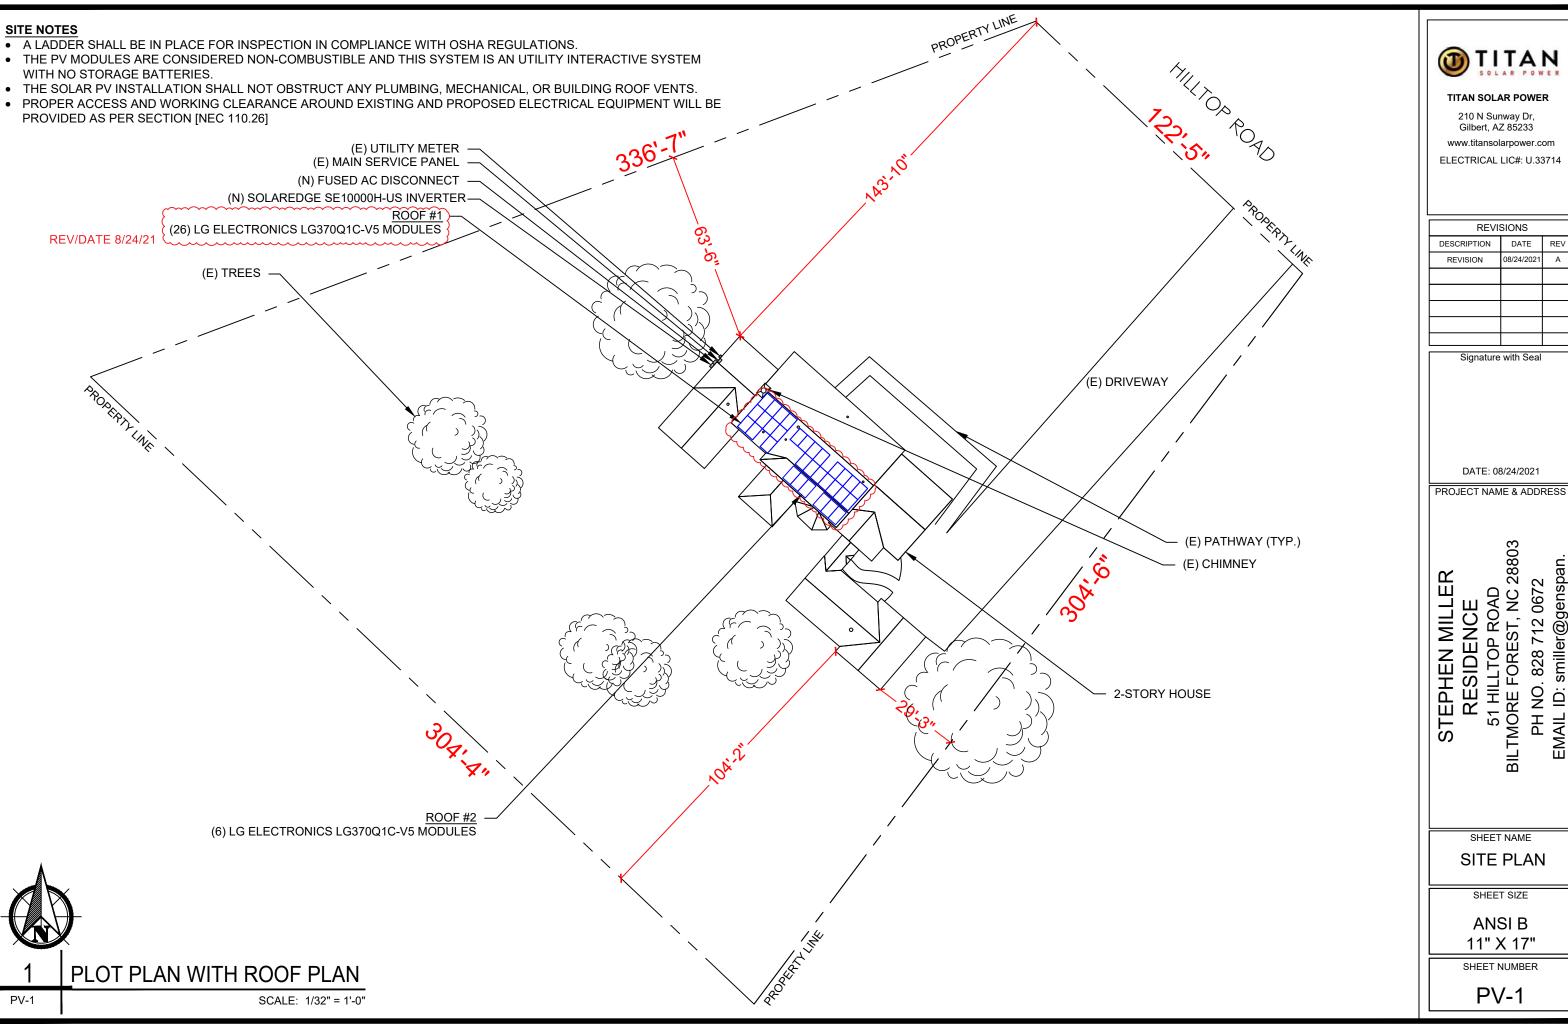



Gilbert, AZ 85233

REVISIONS				
DESCRIPTION	DATE	REV		
REVISION	08/24/2021	Α		

Signature with Seal


SITE PLAN

**ANSI B** 

DESIGN SPECIFICATION			
RISK CATEGORY:		П	
CONSTRUCTION:		SF	.D
ZONING:		RE	SIDENTIAL
SNOW LOAD (ASCE 7-10):		15	PSF
EXPOSURE CATEGORY:		В	
WIND SPEED (ASCE 7-10):		11	5 MPH
DANIEL HEIGHT OFF POOF	"ا		

PANEL HEIGHT OFF ROOF	4"
-----------------------	----

MODULE TYPE, DIMENSIONS & WEIGHT		
NUMBER OF MODULES:	32 MODULES	
MODULE TYPE:	LG ELECTRONICS LG370Q1C-V5	
MODULE WEIGHT:	40.79 LBS	
MODULE DIMENSIONS:	66.93" X 40" = 18.59 SF	
UNIT WEIGHT OF AREA:	2.20 PSF	
·		

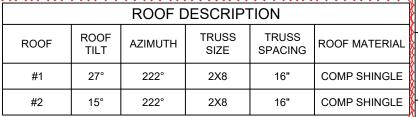

		ARR	Α
OOF MATERIAL			
OMP SHINGLE		ROOF	Ν
	(I		

#1

#2

26

	ARRAY AREA & ROOF AREA CALC'S				
(					ROOF
٦L (			ARRAY	ROOF	AREA
—∤	ROOF	# OF MODULES	AREA	AREA	COVERED
ΕX		MODULES	(Sq. Ft.)	(Sq. Ft.)	BY ARRAY
<b></b> ⟨/	1	I		l	l (%) l

432.69

116.3

- JUNCTION BOX

 ROOF ATTACHMENT -- - CONDUIT

- MAIN SERVICE PANEL

O  $\ \square$  - VENT, ATTIC FAN (ROOF OBSTRUCTION)

- INVERTER - AC DISCONNECT

LEGEND JB

ACD MSP

UM

669.39

194.52

TITAN SOLAR POWER 65 60

TITAN SOLAR POWER 210 N Sunway Dr, Gilbert, AZ 85233

www.titansolarpower.com ELECTRICAL LIC#: U.33714

REVISIONS DESCRIPTION DATE 08/24/2021

Signature with Seal

DATE: 08/24/2021

PROJECT NAME & ADDRESS

RESIDENCE 51 HILLTOP ROAD BILTMORE FOREST, NC 28803 EMAIL ID: smiller@genspan PH NO. 828 712 0672

STEPHEN MILLER

40"

LG ELECTRONICS

LG370Q1C-V5 MODULES

66.93"


SHEET NAME **ROOF PLAN &** 

> **MODULES** SHEET SIZE

**ANSI B** 11" X 17"

SHEET NUMBER

PV-2

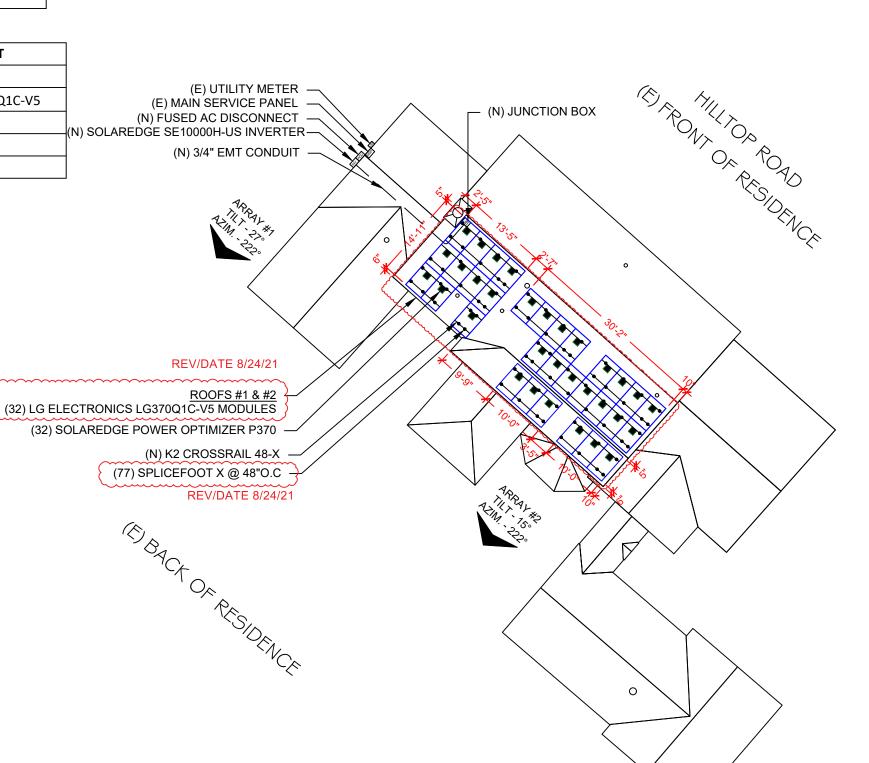



**ROOF PLAN & MODULES** 

PV-2

SCALE: 1/16" = 1'-0"


RF\	//DATE	8/24/21
< 1 \L \		- 0/27/21

,				
BILL OF MATERIALS				
EQUIPMENT QTY DESCRIPTION		DESCRIPTION		
SOLAR PV MODULE	32	LG ELECTRONICS LG370Q1C-V5		
OPTIMIZER	32	SOLAREDGE POWER OPTIMIZER P370		
INVERTER	1	SOLAREDGE SE10000H-US		
AC DISCONNECT	1	EATON DG222NRB, PV SYSTEM AC DISCONNECT SWITCH FUSED, 60A W/X FUSES, 120/240V 2P NEMA 3R		
JUNCTION BOX	1	JUNCTION BOX, NEMA 3R, UL LISTED		
ATTACHMENT	77	SPLICE FOOT X		
ATTACHMENT	77	K2 SOLAR SEAL BUTYL PAD		
ATTACHMENT	154	MS X 60 LAG SCREWS		
ATTACHMENT	77	CAP SCREW, HEX HEAD, 5/16"-18" X 1"		
RAILS	16	K2 CROSSRAIL 48-X RAIL (166")		
BONDED SPLICE	2	SPLICE KIT		
CLAMPS	82	MODULES CLAMPS (MID CLAMPS & END CLAMPS)		
GROUNDING LUG	9	GROUNDING LUG		

B - MODULE STRINGING

REV/DATE 8/24/21

(E) FRONT OF RESIDENCE

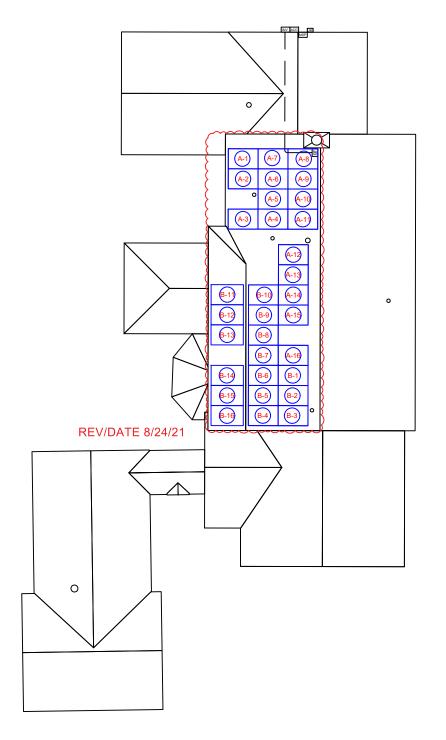



TITAN

### **TITAN SOLAR POWER**

210 N Sunway Dr, Gilbert, AZ 85233 www.titansolarpower.com

ELECTRICAL LIC#: U.33714

REVISIONS					
DESCRIPTION	DATE	REV			
REVISION	08/24/2021	Α			

Signature with Seal

DATE: 08/24/2021

PROJECT NAME & ADDRESS

STEPHEN MILLER

PH NO. 828 712 0672 EMAIL ID: smiller@genspan

RESIDENCE 51 HILLTOP ROAD BILTMORE FOREST, NC 28803

SHEET NAME STRING LAYOUT & BOM

SHEET SIZE

ANSI B 11" X 17"

SHEET NUMBER

PV-2A



**ROOF PLAN WITH STRING LAYOUT & BOM** 

PV-2A

SCALE: 1/16" = 1'-0"

## LG NeON®R



## 380W | 375W | 370W | 365W

LG NeON® R is powerful solar module that provides world-class performance. A new cell structure that eliminates electrodes on the front maximizes the utilization of light and enhances reliability.

LG NeON® R is a result of LG's efforts to increase customer's values beyond efficiency. LG NeON® R features enhanced durability, performance under real -world conditions, an enhanced warranty and aesthetic design suitable for











### **Feature**



### **Aesthetic Roof**

LG NeON® R has been designed with aesthetics in mind: the lack of any electrodes on the front creates an improved, modern aesthetic.



### **Extended Product Warranty**

LG has extended the product warranty of the LG NeON® R to 25 years which is top level of the industry.



### **Enhanced Performance Warranty**

LG NeON® R has an enhanced performance warranty. After 25 years, LG NeON® R is guaranteed to perform at minimum 90.8% of initial performance.



### More generation per square meter

The LG NeON® R has been designed to significantly enhance its output, making it efficient even in limited space.

### About LG Electronics

LG Electronics is a global big player, committed to expanding its operations with the solar market. The company first embarked on a solar energy source research program in 1985, supported by LG Group's wast experience in the semi-conductor, LCD, chemistry and materials industries. In 2010, LG Solar successfully released its first MonoX® series to the market, which is now available in 32 countries. The NeON® (previous, MonoX® NeON), NeON® 2, NeON® 2 BiFacial won the "Intersolar AWARD" in 2013, 2015 and 2016, which demonstrates LG Solar's lead, innovation and commitment to the industry.



## **LG** NeON®R

### LG380Q1C-V5|LG375Q1C-V5|LG370Q1C-V5|LG365Q1C-V5

#### General Data

Cell Properties(Material / Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	60 Cells (6 x 10)
Module Dimensions(L x W x H)	1,700mm x 1,016mm x 40mm
Weight	17.5 kg
Glass(Thickness / Material)	2.8mm / Tempered Glass with AR Coating
Backsheet(Color)	White
Frame(Material)	Anodized Aluminium
Junction Box(Protection Degree)	IP68 with 3 Bypass Diodes
Cables(Length)	1,000mm x 2EA
Connector(Type / Maker)	MC4 / MC

#### Certifications and Warranty

Lei tilications and vvariant	7		
	IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016		
	UL 1703		
Certifications	ISO 9001, ISO 14001, ISO 50001		
	OHSAS 18001		
Salt Mist Corrosion Test	IEC 61701:2012 Severity 6		
Ammonia Corrosion Test	IEC 62716:2013		
Module Fire Performance	Type 1 (UL 1703)		
Fire Rating	Class C (UL 790, ULC/ORD C 1703)		
Product Warranty	25 Years		
Output Warranty of Pmax	Linear Warranty*		

<sup>\* 1)</sup> First year : 98%, 2)After 1st year : 0.3% annual degr \*\* LG380Q1C-V5 model has UL 1703 certification only

### **Temperature Characteristics**


NMOT*	[ °C ]	44 ± 3	
Pmax	[%/°C]	-0.30	
Voc	[%/°C]	-0.24	
Isc	[%/°C]	0.037	

Wind speed 1 m/s, Spectrum AM 1.5

### Flectrical Properties (NIMOT)

Model		LG380Q1C-V5	LG375Q1C-V5	LG370Q1C-V5	LG365Q1C-V5
Maximum Power (Pmax)	[W]	286	282	279	275
MPP Voltage (Vmpp)	[V]	37.3	37.1	36.9	36.6
MPP Current (Impp)	[A]	7.67	7.61	7.55	7.51
Open Circuit Voltage (Voc)	[V]	40.3	40.3	40.3	40.2
Short Circuit Current (Isc)	[A]	8.73	8.72	8.71	8.70

### **I-V Curves**

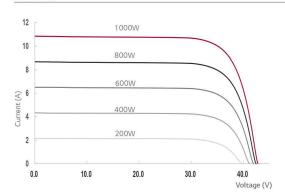

Solar Business Division

LG Twin Towers, 128 Yeoui-daero, Yeongdeungpo-gu, Seoul

#### Electrical Properties (STC\*)

Model		LG380Q1C-V5	LG375Q1C-V5	LG370Q1C-V5	LG365Q1C-V5
Maximum Power (Pmax)	[W]	380	375	370	365
MPP Voltage (Vmpp)	[V]	37.4	37.2	37.0	36.7
MPP Current (Impp)	[A]	10.17	10.09	10.01	9.95
Open Circuit Voltage (Voc, ±5%)	[V]	42.9	42.8	42.8	42.8
Short Circuit Current (Isc, ±5%)	[A]	10.84	10.83	10.82	10.80
Module Efficiency	[%]	22.0	21.7	21.4	21.1
Power Tolerance	F%1		0~	+3	

<sup>\*</sup> STC (Standard Test Condition): Irradiance 1000 W/m², Cell Temperature 25 °C, AM 1.5, \*\* Measure Tolerance : ± 3%


#### Operating Conditions

Operating Temperature	[°C]	-40 ~ +90
Maximum System Voltage	[V]	1,000
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load(Front)	[Pa / psf]	5,400 / 113
Mechanical Test Load(Rear)	[Pa / psf]	4,000 / 83.5

Mechanical Test Load 5,400Pa / 4,000Pa based on IEC 61215-2 : 2016 (Test Load = Design Load x Safety Factor(1.5))

ackaging configuration				
Number of Modules Per Pallet	[EA]	25		
Number of Modules Per 40ft HQ Container	[EA]	650		
Packaging Box Dimensions (L x W x H)	[mm]	1,750 x 1,120 x 1,221		
Packaging Box Gross Weight	[kg]	473		

### Dimensions (mm / inch)

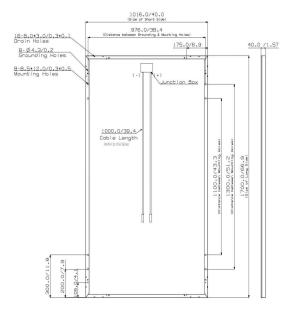

Product specifications are subject to change without notice. DS-V5-60-C-G-F-EN-90812

© 2019 LG Electronics. All rights reserved.



## **(II)** TITAN

### **TITAN SOLAR POWER**

210 N Sunway Dr, Gilbert, AZ 85233

www.titansolarpower.com

ELECTRICAL LIC#: U.33714

REVISIONS				
DESCRIPTION	DATE	REV		
REVISION	08/24/2021	Α		
	İ			

Signature with Seal

DATE: 08/24/2021

PROJECT NAME & ADDRESS

28803 STEPHEN MILLER RESIDENCE 51 HILLTOP ROAD BILTMORE FOREST, NC 28 712 0672 PH NO. 828

> SHEET NAME **EQUIPMENT SPECIFICATION**

> > SHEET SIZE

ANSI B 11" X 17"

SHEET NUMBER

PV-7

North Carolina Firm License Number - C3406

August 22, 2021

Titan Solar Power NC, Inc. 525. W. Baseline Road Mesa, AZ 85210

Re: Miller, Stephen - TSP93362 (SCPC Project No. - 2021.26.18080)

51 Hilltop Road

Biltmore Forest, NC 28803

Titan Solar Power NC:

At the request of Titan Solar Power NC, Structural Capacity, PC (SCPC) has evaluated the roof structure at the above noted site to determine its adequacy to support the attachment of roof mounted solar arrays. The roof structure is composed of wood sheathing supported by 2x8 wood rafters at 16" o.c. The maximum rafter span does not exceed approximately 17'-1".

### **Design Criteria:**

- Ground Snow Load = 15 psf
- Wind speed = 115 mph
- Risk Category = II / Wind Exposure B
- PV module Dead Load = 3.5psf (max)
- PV Module Count = 32

Each panel will be supported by (2) mounting rails, (1) at each end. The mounting legs of the solar panel railing will be attached directly to the rafters with a 5/16 (min) inch diameter lag screw. The installer shall use best practice construction methods to locate the lag screw in the center of each rafter. All wood members supporting PV modules should consist of sound lumber without significant signs of deterioration.

The mounting legs of the solar panel racking system shall be located at 5'-4'' o.c. maximum. The mounting legs should be staggered at the primary framing member spacing (1'-4") at adjacent solar panel rails. The maximum rail cantilever span should be limited to 1'-4''.

The existing roof structure at the above referenced site is adequate to support the solar panel loadings, as noted above, per the 2018 North Carolina Residential Code, if installed in accordance with the above stated conditions. The adequacy of the solar panels and

solar racking system are outside the scope of this letter and to be provided by solar panel and racking manufacturer, if required.

If any conditions are found in conflict with those stated above, SCPC should be made aware immediately for re-evaluation and report amendment, as applicable, before proceeding with solar panel installation.

Adrian

**Durham** 

Sincerely,

Structural Capacity, PC

Adrian S. Durham, PE, SE

Edrian S. Derham

Digitally signed by Adrian Durham

Date: 2021.08.22 18:00:09

-04'00'

## **Zoning Compliance Application**

Town of Biltmore Forest

Name

Tunc and Nancy Togar

**Property Address** 

3 Stuyvesant Crescent, Biltmore Forest NC

**Phone** 

(828) 242-2044

**Email** 

Togar.tunc31@gmail.com

Parcel ID/PIN Number

96-46-93-0608

ZONING INFORMATION

**Current Zoning** 

R-1

Lot Size

.89 Acres, 38,678 Sq, Ft,

**Maximum Roof Coverage** 

4,682 square feet (Up to 1 acres)

**Proposed Roof Coverage Total** 

4,874

**Maximum Impervious Surface Coverage** 

Up to 1 acre (27.5 percent of lot area)

**Proposed Impervious Surface Coverage** 

10,820

**Front Yard Setback** 

60 feet (R-1 District)

Side Yard Setback

20 feet (R-1 District)

**Rear Yard Setback** 

**Building Height** 

25 feet (R-1 District) 33' x 8"

**Description of the Proposed Project** 

This remodeling project consist of reconfiguration of much of the first floor, including enlarging the exisiting Kitchen, adding additional area to the existing Garage, adding a complete new First Floor Owners Suite, adding a new Front Entry Open Terrace, adding a new screened Rear Porch and reconfiguring and resurfacing the existing Driveway.

**Estimated Start Date** 

12/1/2021

**Estimated Completion Date** 

12/1/2022

**Estimated Cost of Project** 

\$1,100,000.00

## **Supporting Documentation (Site Plan, Drawings, Other Information)** 03-Left Side Elevation Rendering.pdf

04-Rear Elevation Rendering.pdf

05-Remodeled First Floor Plan.pdf

06-Remodeled Site Plan.pdf

01-Front Elevation Rendering.pdf

02-Right Side Elevation Rendering.pdf

**Applicant Signature** 

Date

8/24/2021

### **VARIANCE APPLICATION**

Town of Biltmore Forest

### Name

Tunc and Nancy Togar

### **Address**

3 Stuyvesant Cresant, Biltmore Forest, NC

Phone Email

(828) 242-2044 togar.tunc31@gmail.com

Current Zoning/Use Requested Use

R

**APPLICATION REQUIREMENTS**: An application to the Board of Adjustment for a variance must be submitted to the Town of Biltmore Forest Town Manager at least 21 days prior to the meeting at which the application will be considered. A pre-application meeting with Town staff is required prior to application submittal to the Board of Adjustment.

### What would you like to do with your property?

We would like to add on to the existing home with a new First Floor Owner's Suite, consisting of a new Owner's Bedroom, new Owners Bath, and a new Owner's Wardrobe Closets. We would like to expand our existing Garage to include better sized areas for our automobiles and better garage Storage areas. We would like to expand and renovate our Kitchen. Finally, we would like to add a new Screened Porch.

### What does the ordinance require?

The Total Roof requirements are 4,682 Sq. Ft. and we are at 4,874 Sq. Ft. for this project.

BOARD OF ADJUSTMENT: N.C.G.S. 160A-388(D) requires that the Board of Adjustment shall vary the provisions of the Zoning Ordinance only upon a showing of ALL the items below. The Board of Adjustment must follow strict procedure and all determinations must be decided by a concurring vote of four-fifths of the members of the Board. It is important to provide detailed supporting documentation for the Board of Adjustment to review. If necessary, additional sheets may be attached to this application.

### REQUIRED FINDINGS: Please provide a thorough response to each.

### Unnecessary hardship would result from the strict application of the ordinance.

We are only going over the stated Roof Covered Area by an insignificant amount, however reducing the size/square footage of the new areas to be added on would result in Room sizes that would not meet the Owner's needs for each new area.

## The hardship results from conditions that are peculiar to the property, such as location, size, or topography.

The hardship is not caused or related to size or location of the property.

### The hardship did not result from actions taken by the applicant or the property owner.

There is not action that has caused hardship. The Owner's are simply attempting to renovate their existing, dated home and bring the property up to today's real estate expectations, as well as meet their own needs.

The requested variance is consistent with the spirit, purpose, and intent of the ordinance, such that


### public safety is secured, and substantial justice is achieved.


The variance requested will allow this extensive renovation to this 40 year old home up to date and greatly improve the exterior of the home, along with creating wonderful new areas to the First Floor. This project will very much so keep the spirit of Biltmore Forest, and provide a safe and well executed final product.

I hereby certify that all of the information set forth above is true and accurate to the best of my knowledge.


**Signature** 

**Date** 9/1/2021

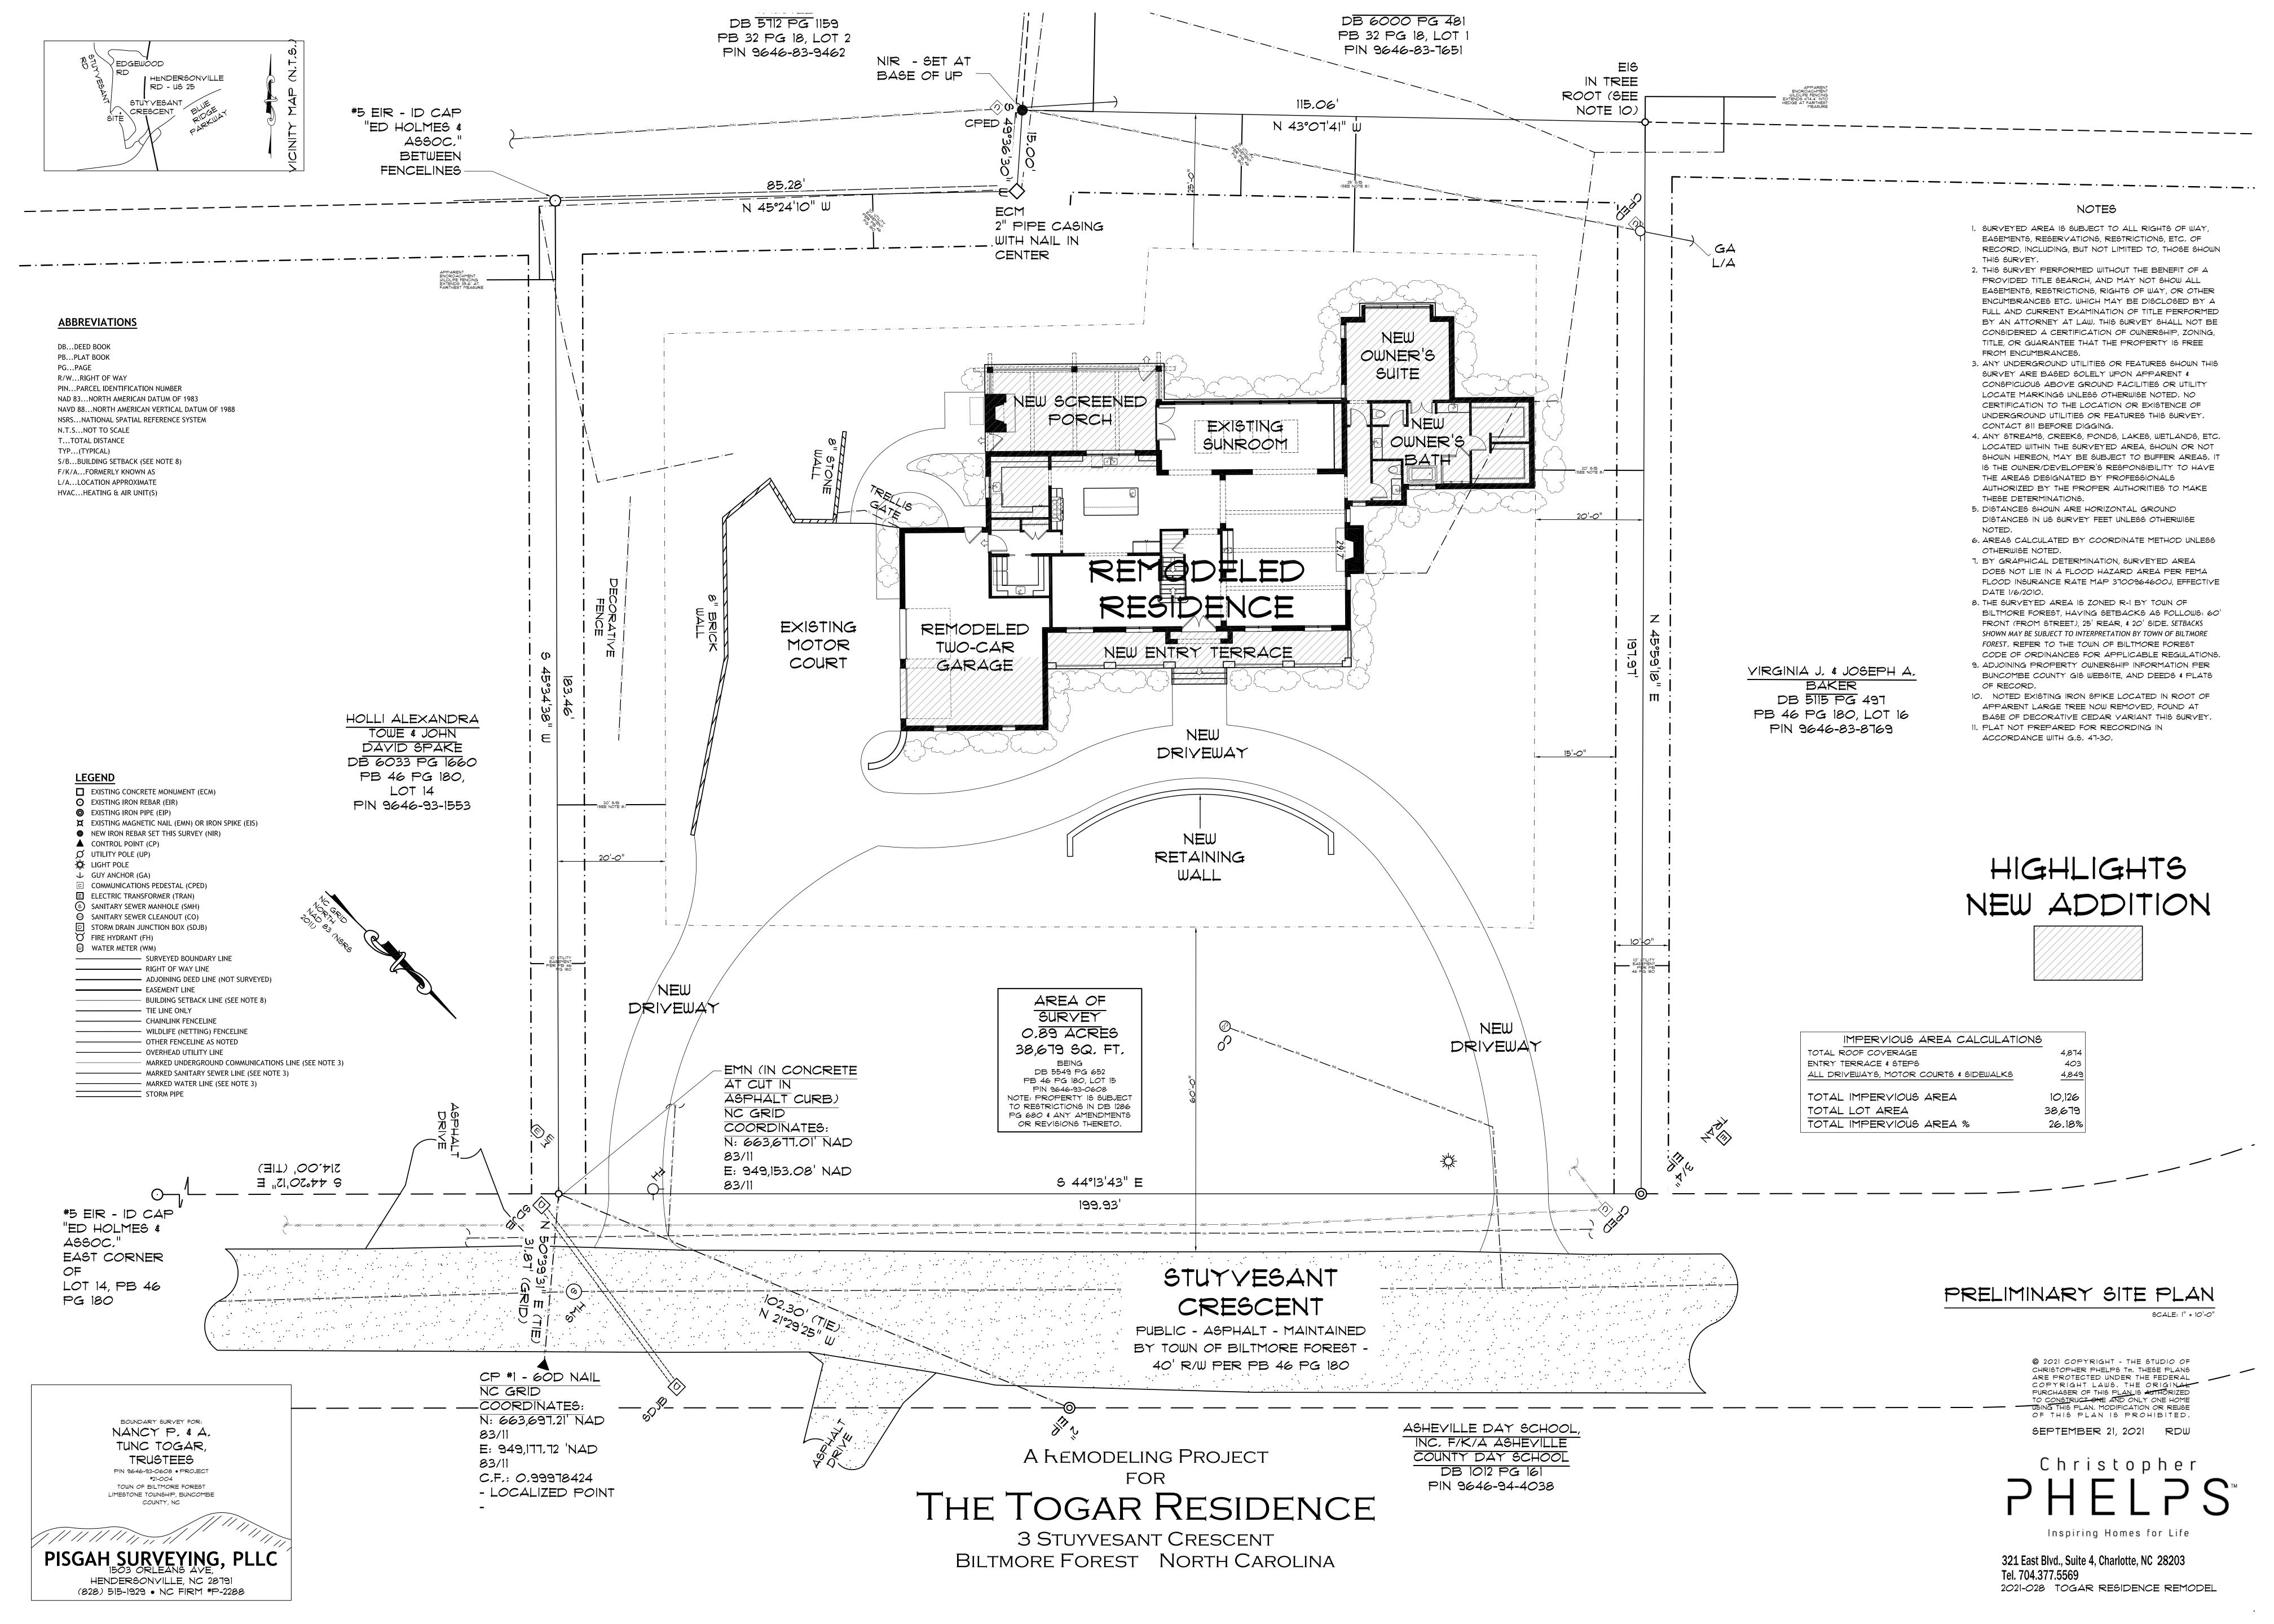

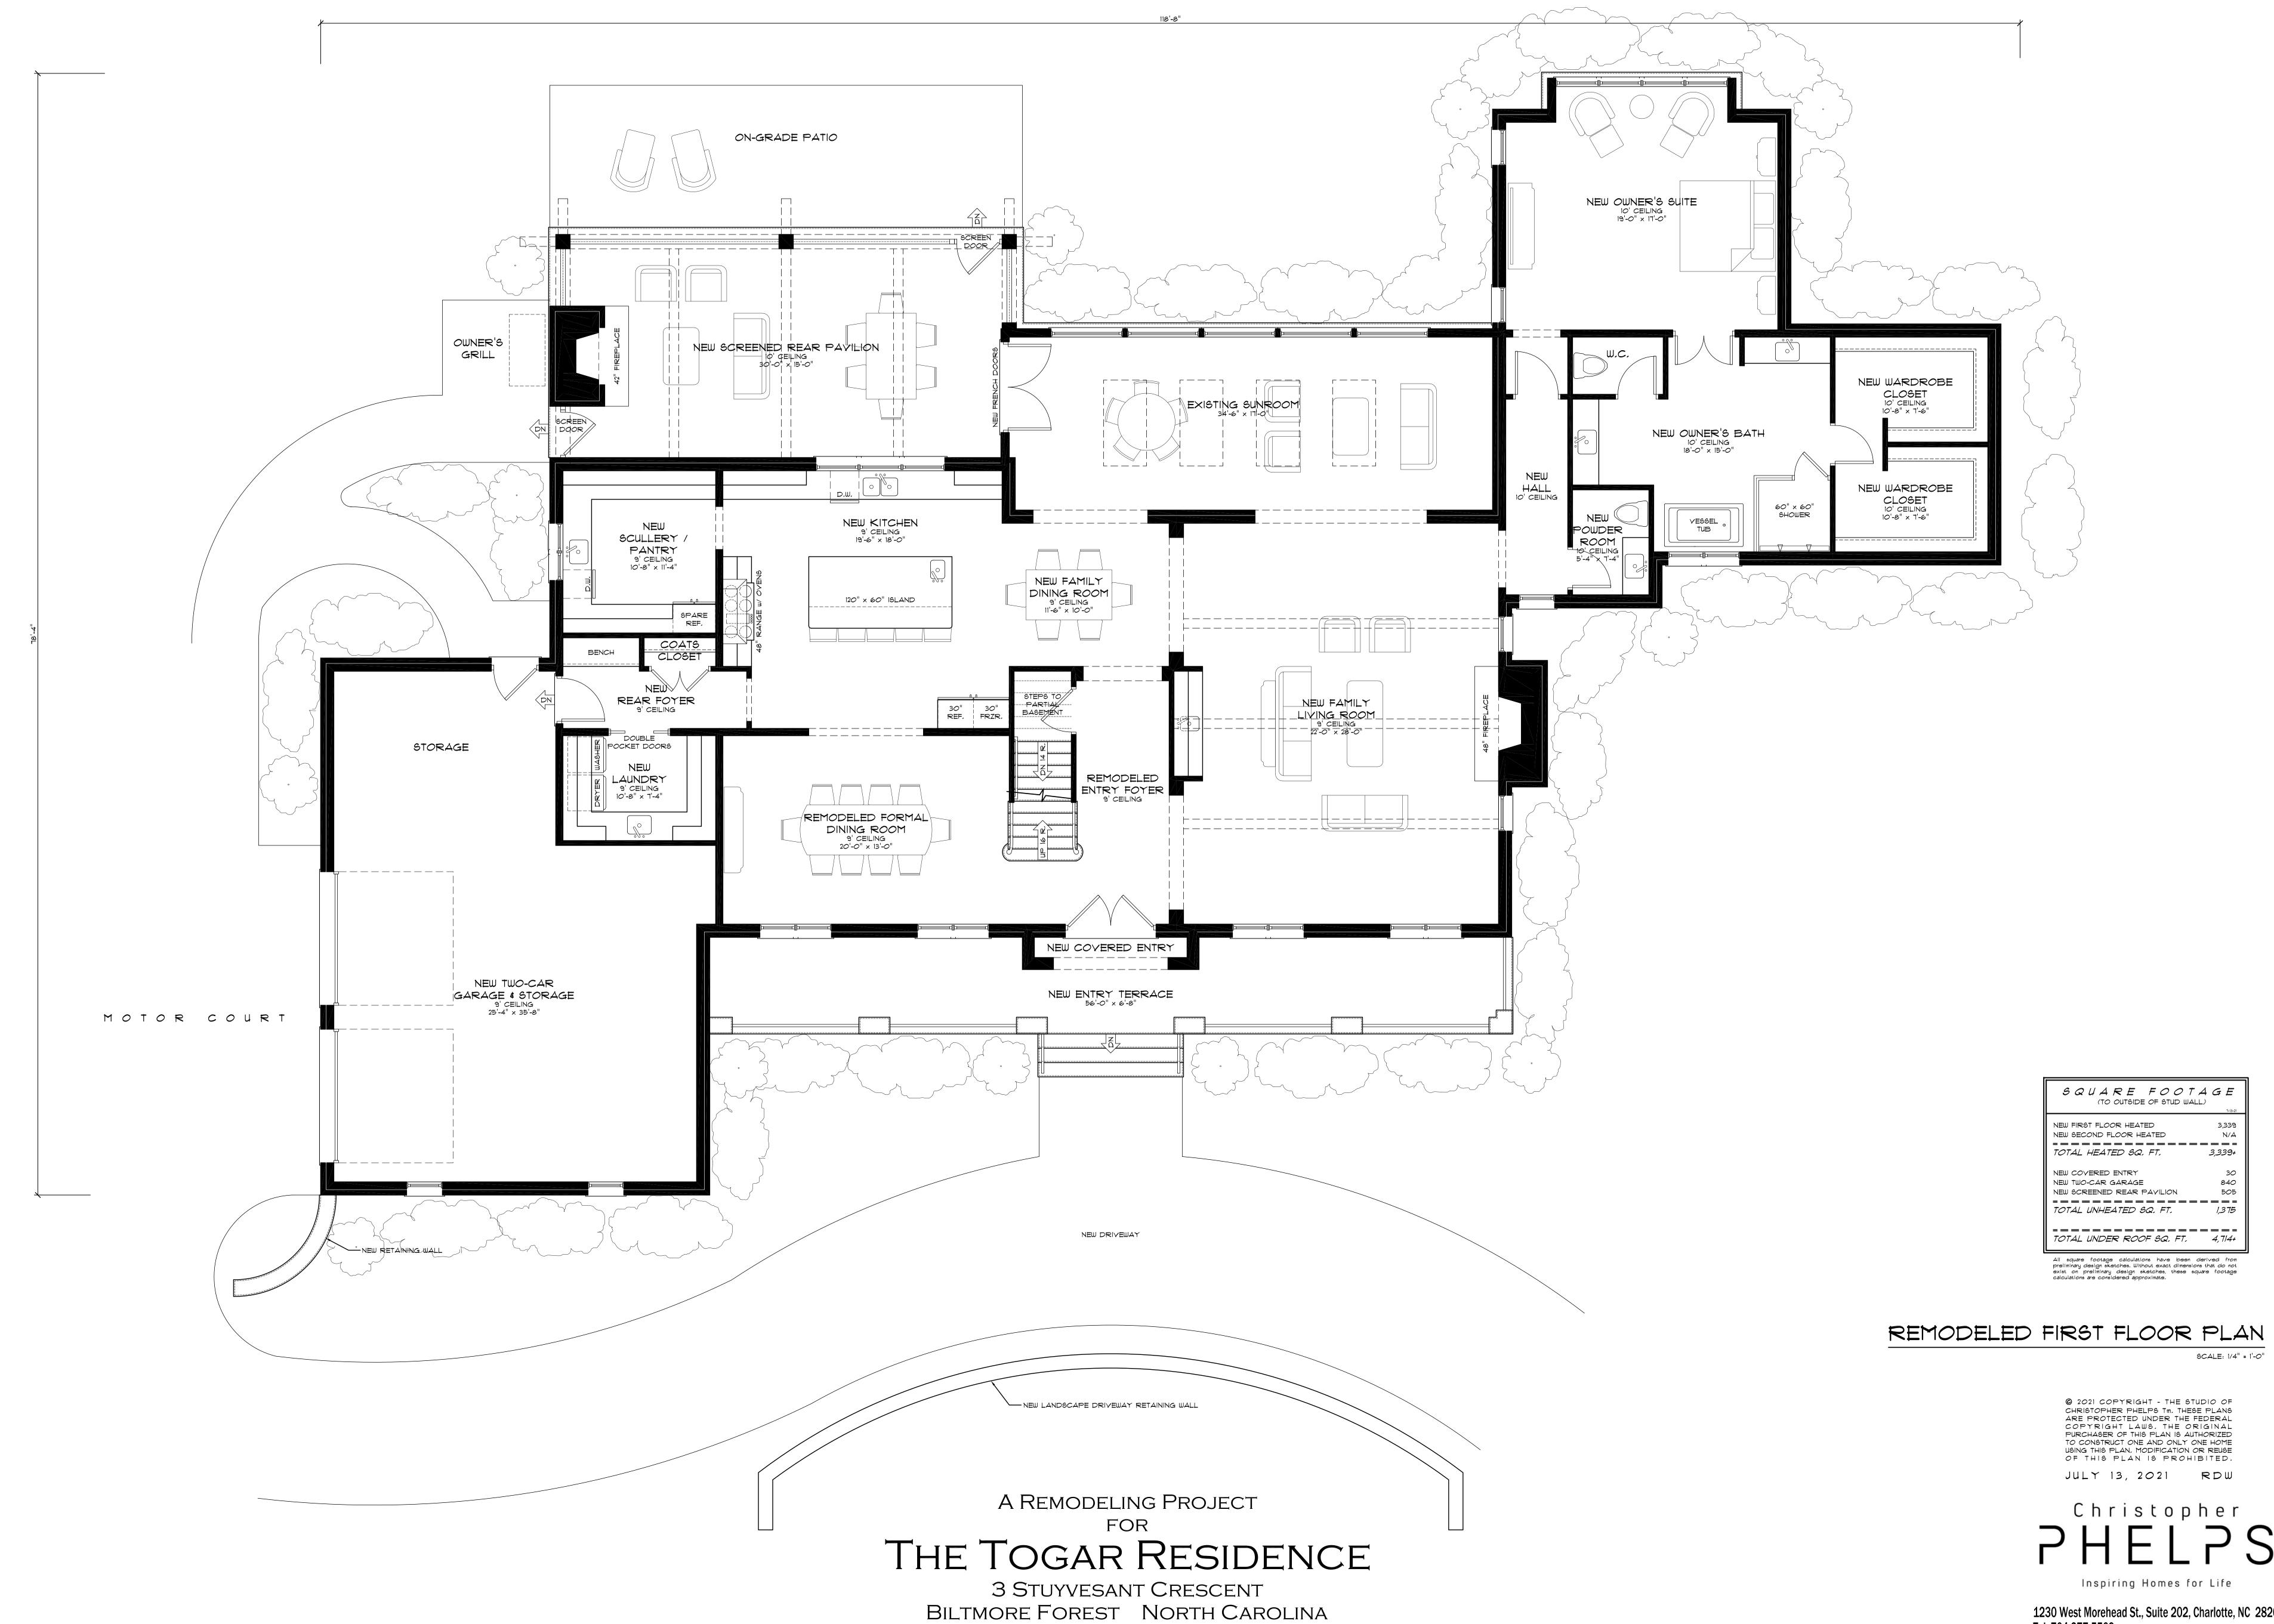

1230 West Morehead St., Suite 202, Charlotte, NC 28208 Tel. 704.377.5569
2021-028 TOGAR RESIDENCE REMODEL

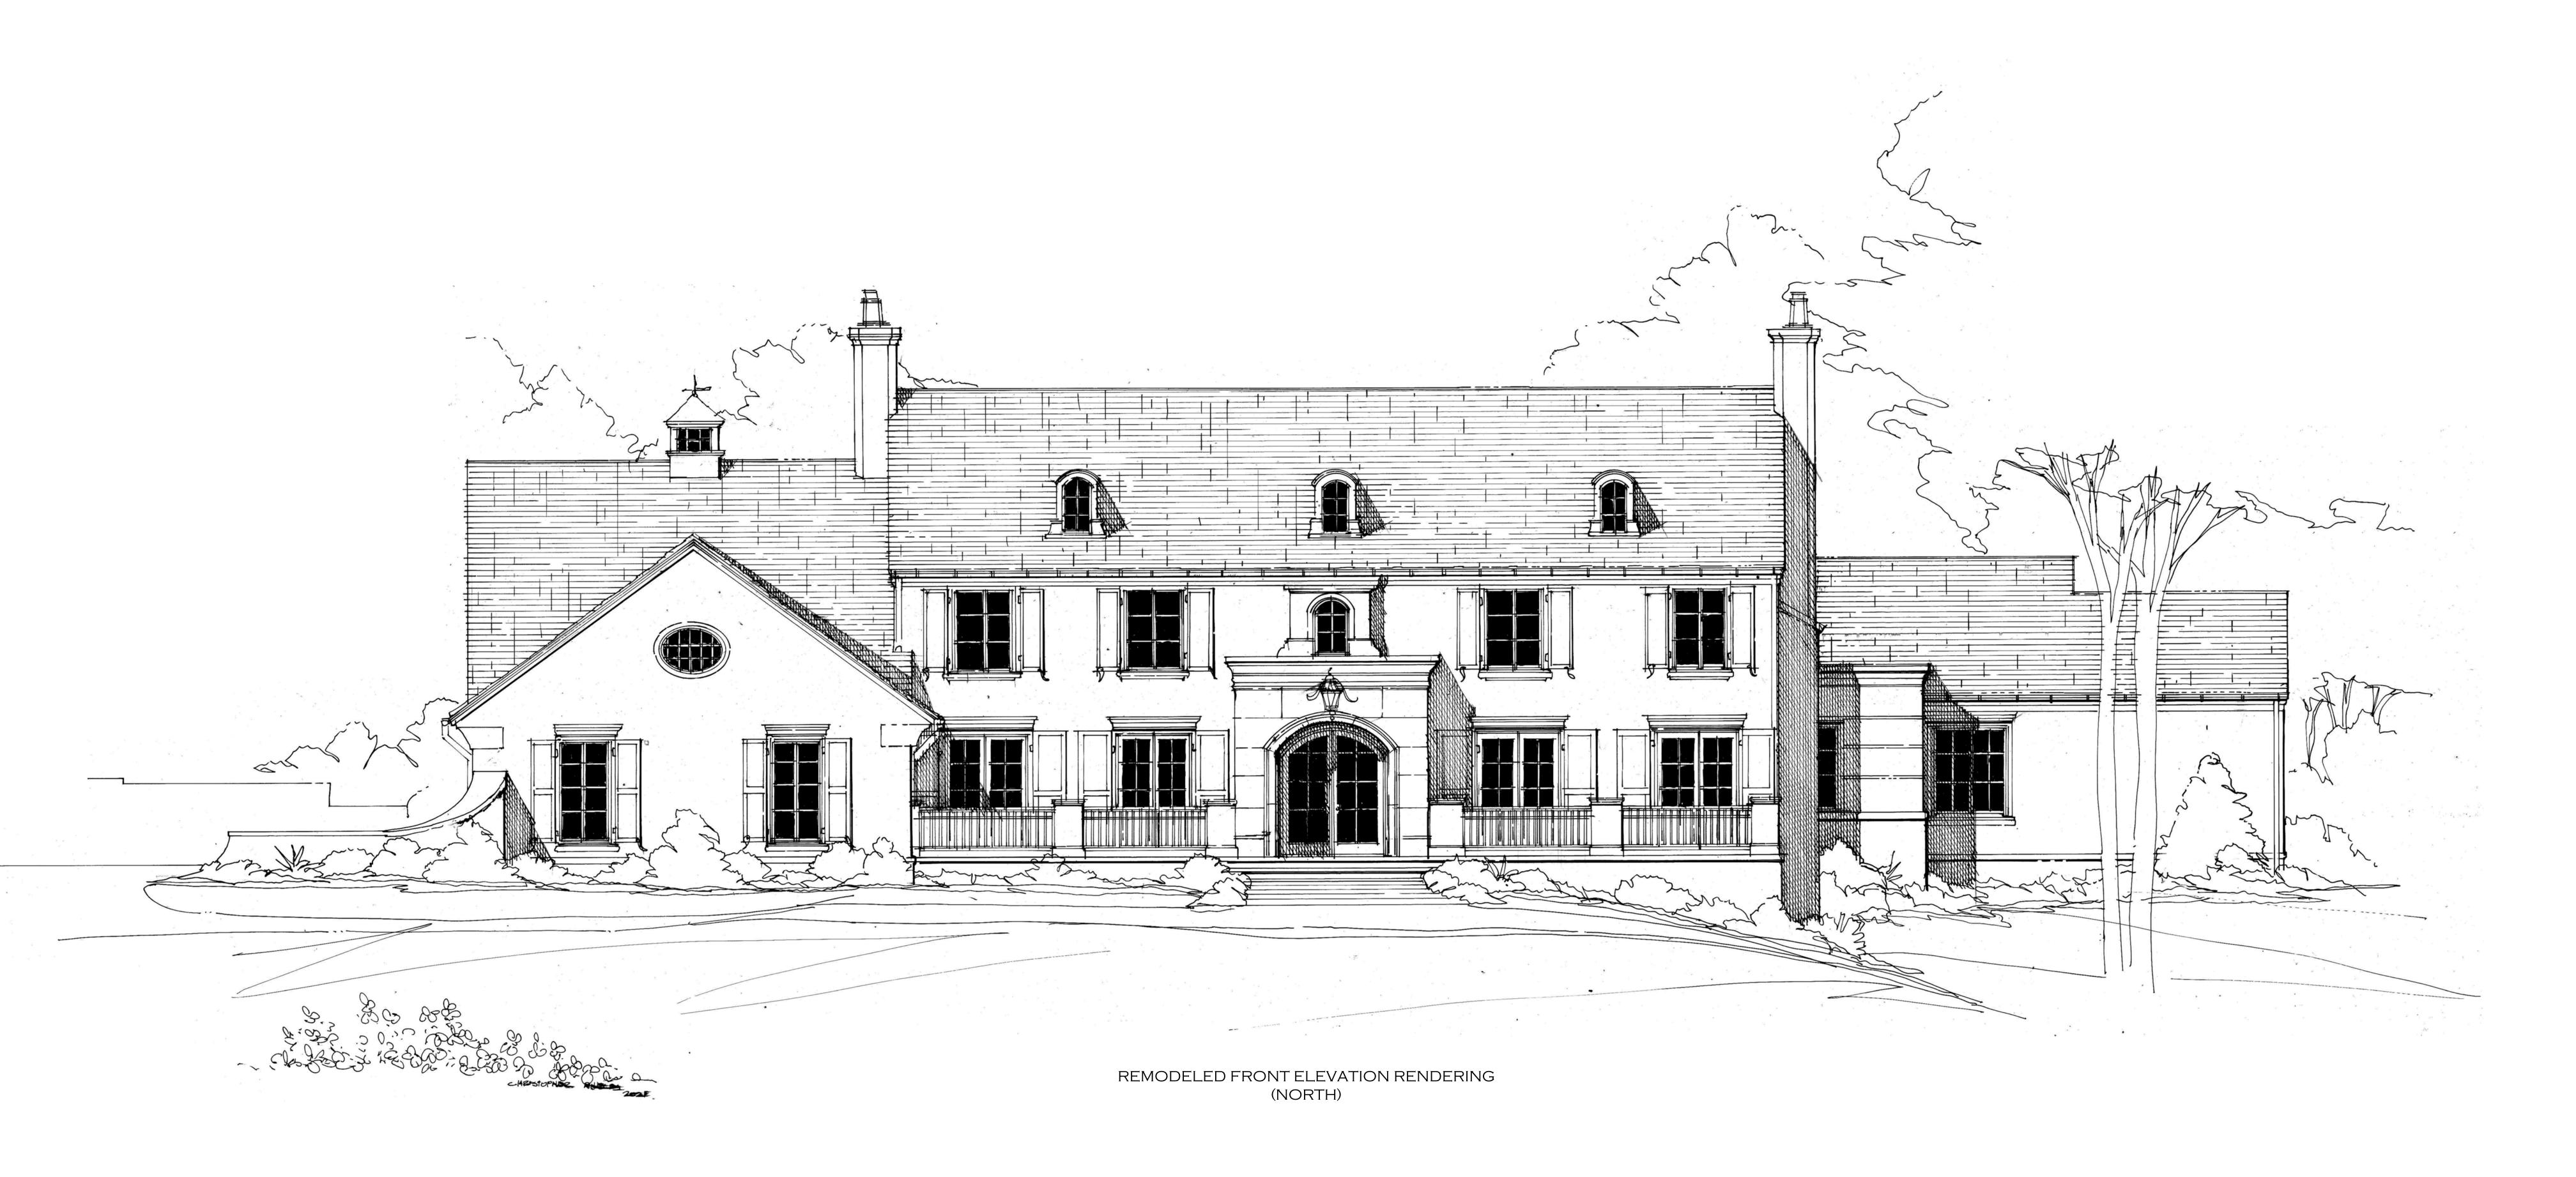

A REMODELING PROJECT FOR

## THE TOGAR RESIDENCE

3 STUYVESANT CRESCENT
BILTMORE FOREST NORTH CAROLINA



P: (704) 377-5569 · Christopherphelps.com



REMODELED RIGHT SIDE ELEVATION RENDERING (WEST)

A REMODELING PROJECT FOR

## THE TOGAR RESIDENCE

3 STUYVESANT CRESCENT
BILTMORE FOREST NORTH CAROLINA

PHELPS

Inspiring Homes for Life

AUGUST 9, 2021

1230 W. Morehead Street • Suite 202 • Charlotte • NC • 28
10 Cheshire Drive • Black Mountain • NC • 28711
P: (704) 377-5569 • Christopherphelps.com



REMODELED LEFT SIDE ELEVATION RENDERING (EAST)

A REMODELING PROJECT FOR


## THE TOGAR RESIDENCE

3 STUYVESANT CRESCENT
BILTMORE FOREST NORTH CAROLINA

PHELPS

Inspiring Homes for Life

1230 W. Morehead Street • Suite 202 • Charlotte • NC • 28
10 Cheshire Drive • Black Mountain • NC • 28711
P: (704) 377-5569 • Christopherphelps.com

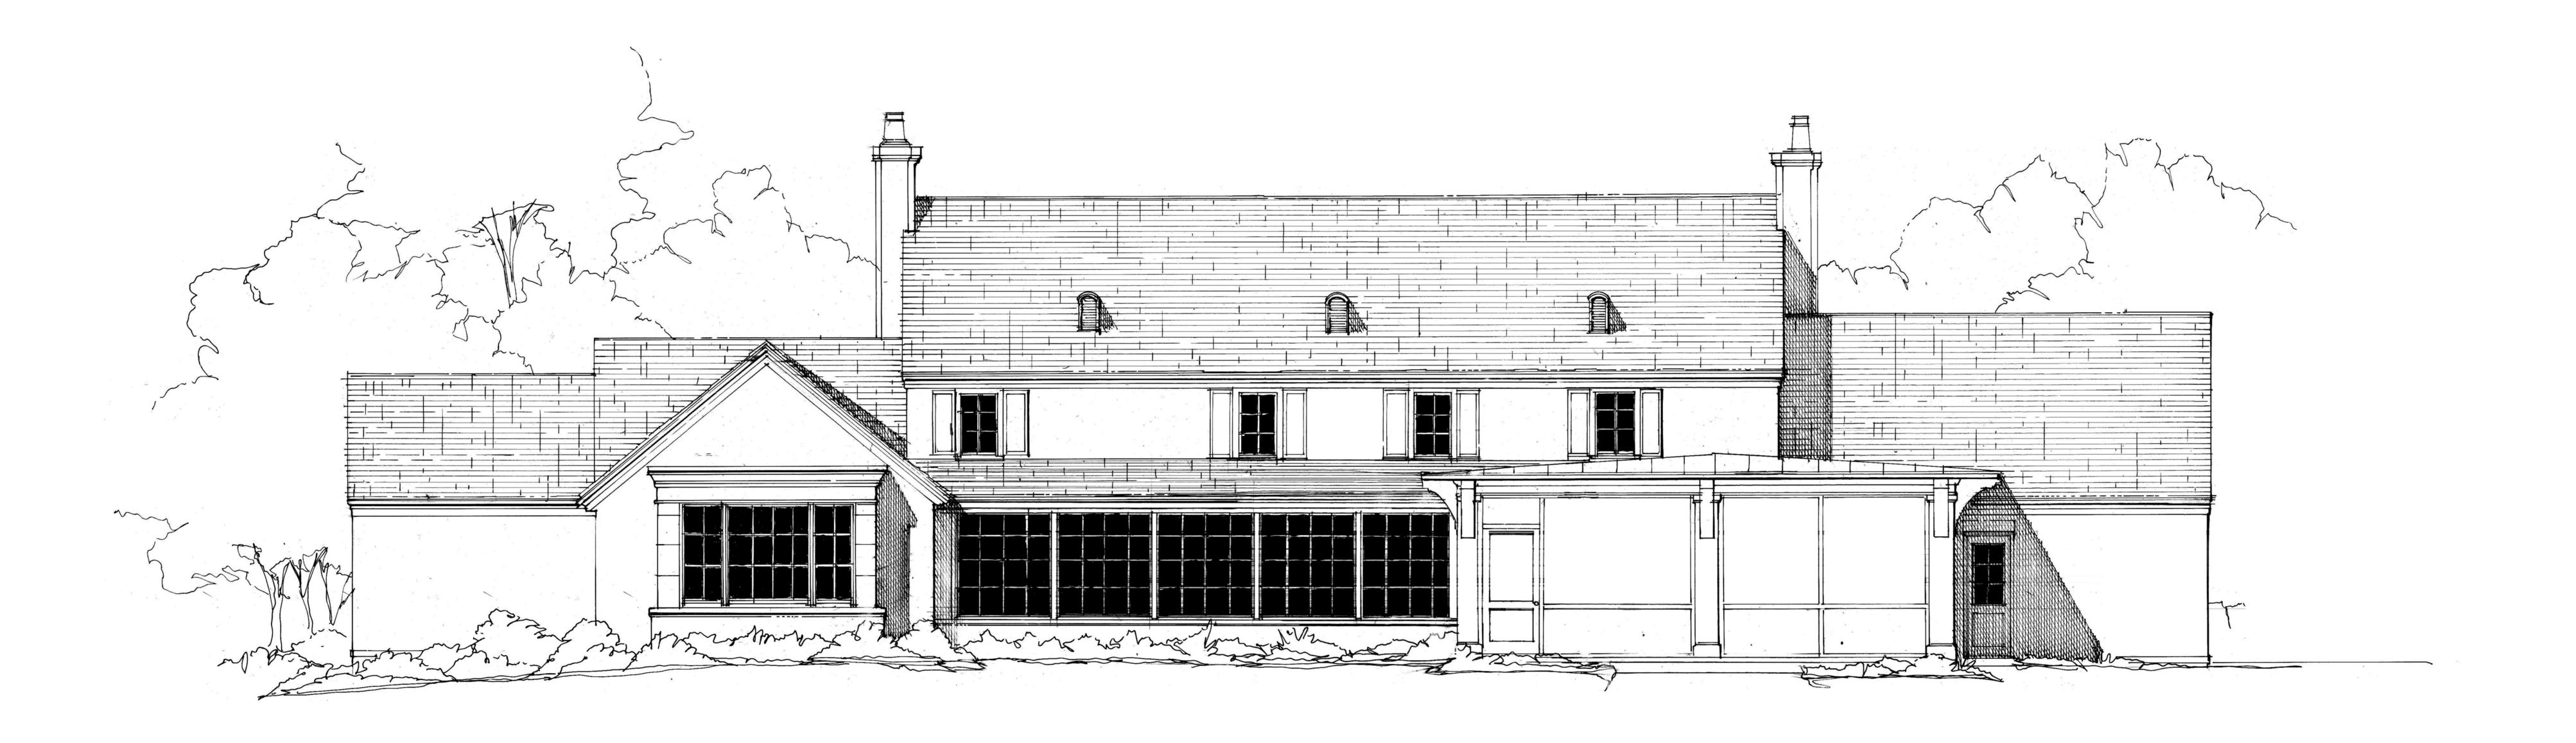

REMODELED REAR ELEVATION RENDERING (SOUTH)

A REMODELING PROJECT FOR

## THE TOGAR RESIDENCE

3 STUYVESANT CRESCENT
BILTMORE FOREST NORTH CAROLINA



P: (704) 377-5569 · Christopherphelps.com

## **Zoning Compliance Application**

Town of Biltmore Forest

Name

Derek Weilbaecher

**Property Address** 

414 Vanderbilt Rd, Biltmore Forest, NC 28803

Phone

(404) 221-0422 don@joelkelly.com

Parcel ID/PIN Number

9646-66-1233

ZONING INFORMATION

**Email** 

**Current Zoning**R-1 **Lot Size**3.01 Acres

Maximum Roof Coverage Proposed Roof Coverage Total

8,200 square feet (Up to 3.5 acres) 8144

Maximum Impervious Surface Coverage Proposed Impervious Surface Coverage

3-6 acres (20 percent of lot area) 17.3%

Front Yard Setback
60 feet (R-1 District)
Side Yard Setback
20 feet (R-1 District)

Rear Yard Setback Building Height

25 feet (R-1 District) 38.5'

**Description of the Proposed Project** 

The scope of work shall include the removal of the existing house, and construction of a new house as outlined in the attached documents.

Estimated Start Date Estimated Completion Date

9/27/2021 10/31/2023

**Estimated Cost of Project** 

\$7,000,000.00

Supporting Documentation (Site Plan, Drawings, Other Information)

Weilbaecher Materials 2021-08-30.pdf

01 Weilbaecher Residence-FLA-Site Landscape Set.pdf

Weilbaecher Zoning-architectural-set 2021-08-30.pdf

## **Special Use Permit Application**

Town of Biltmore Forest

### Name

Derek Weilbaecher

### **Address**

414 Vanderbilt Road, Biltmore Forest, NC 28803

**Phone** 

(404) 221-0422 x103

**Email** 

don@joelkelly.com

### Please select the type of special use you are applying for:

**Accessory Structures** 

The applicant must show that the proposed use will not materially endanger public health or safety or injure value of adjoining or abutting property. In addition, the proposed use must be in general conformity with the plan of development of the town and be in harmony with scale, bulk, height, coverage, density, and character of the neighborhood.

### Please provide a description of the proposed project:

The proposed Accessory Structure for this application is a wood burning fire pit with a gas starter. It will be surrounded by a flagstone patio of approximately 20' diameter, and partially captured by a bench-height site wall on one side, 18-22" high.

## Explain why the project would not adversely affect the public interest of those living in the neighborhood:

Proposed fire pit is located in an area where it will be away from the house, not highly visible from the golf course and buffered from the adjacent property with vegetation. The fire pit surround will sit high enough to prevent hot coals and ash from leaving the enclosure. The area will function as a normal patio when not in use.


I hereby certify that all of the information set forth above is true and accurate to the best of my knowledge.

Signature

**Date** 9/2/2021

## WEILBAECHER RESIDENCE

# 414 Vanderbilt Road Biltmore Forest, NC 28803

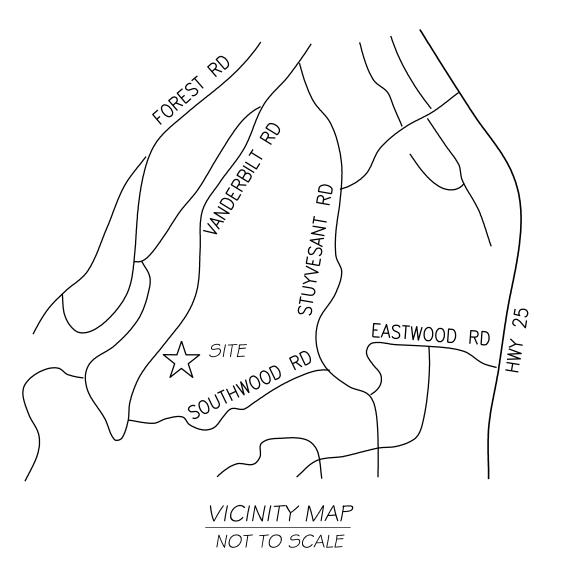



Copyright © 2018, Fusco Land Planning & Design, PLLC

## SHEET INDEX

**EXISTING SITE SURVEY** 

L1.01 SITE NOTES & SPECIFICATIONS

L1.02 GROUND STABILIZATION & MATERIALS HANDLING

L1.03 SELF-INSPECTION, RECORD-KEEPING, & REPORTING

L2.01 SITE STABILIZATION & CLEARING

L3.01 SITE LAYOUT & MATERIALS

L3.02 SITE GRADING, DRAINAGE, EROSION CONTROL, & STORMWATER CONTROL

L3.03 YARD INLET & PIPE SCHEDULE


L4.01 SITE DETAILS

L4.02 SITE DETAILS

L5.01 LANDSCAPE PLAN

L6.01 LANDSCAPE SCHEDULE, NOTES, SPECS, & DETAILS

L6.02 LANDSCAPE SCHEDULE, NOTES, SPECS, & DETAILS

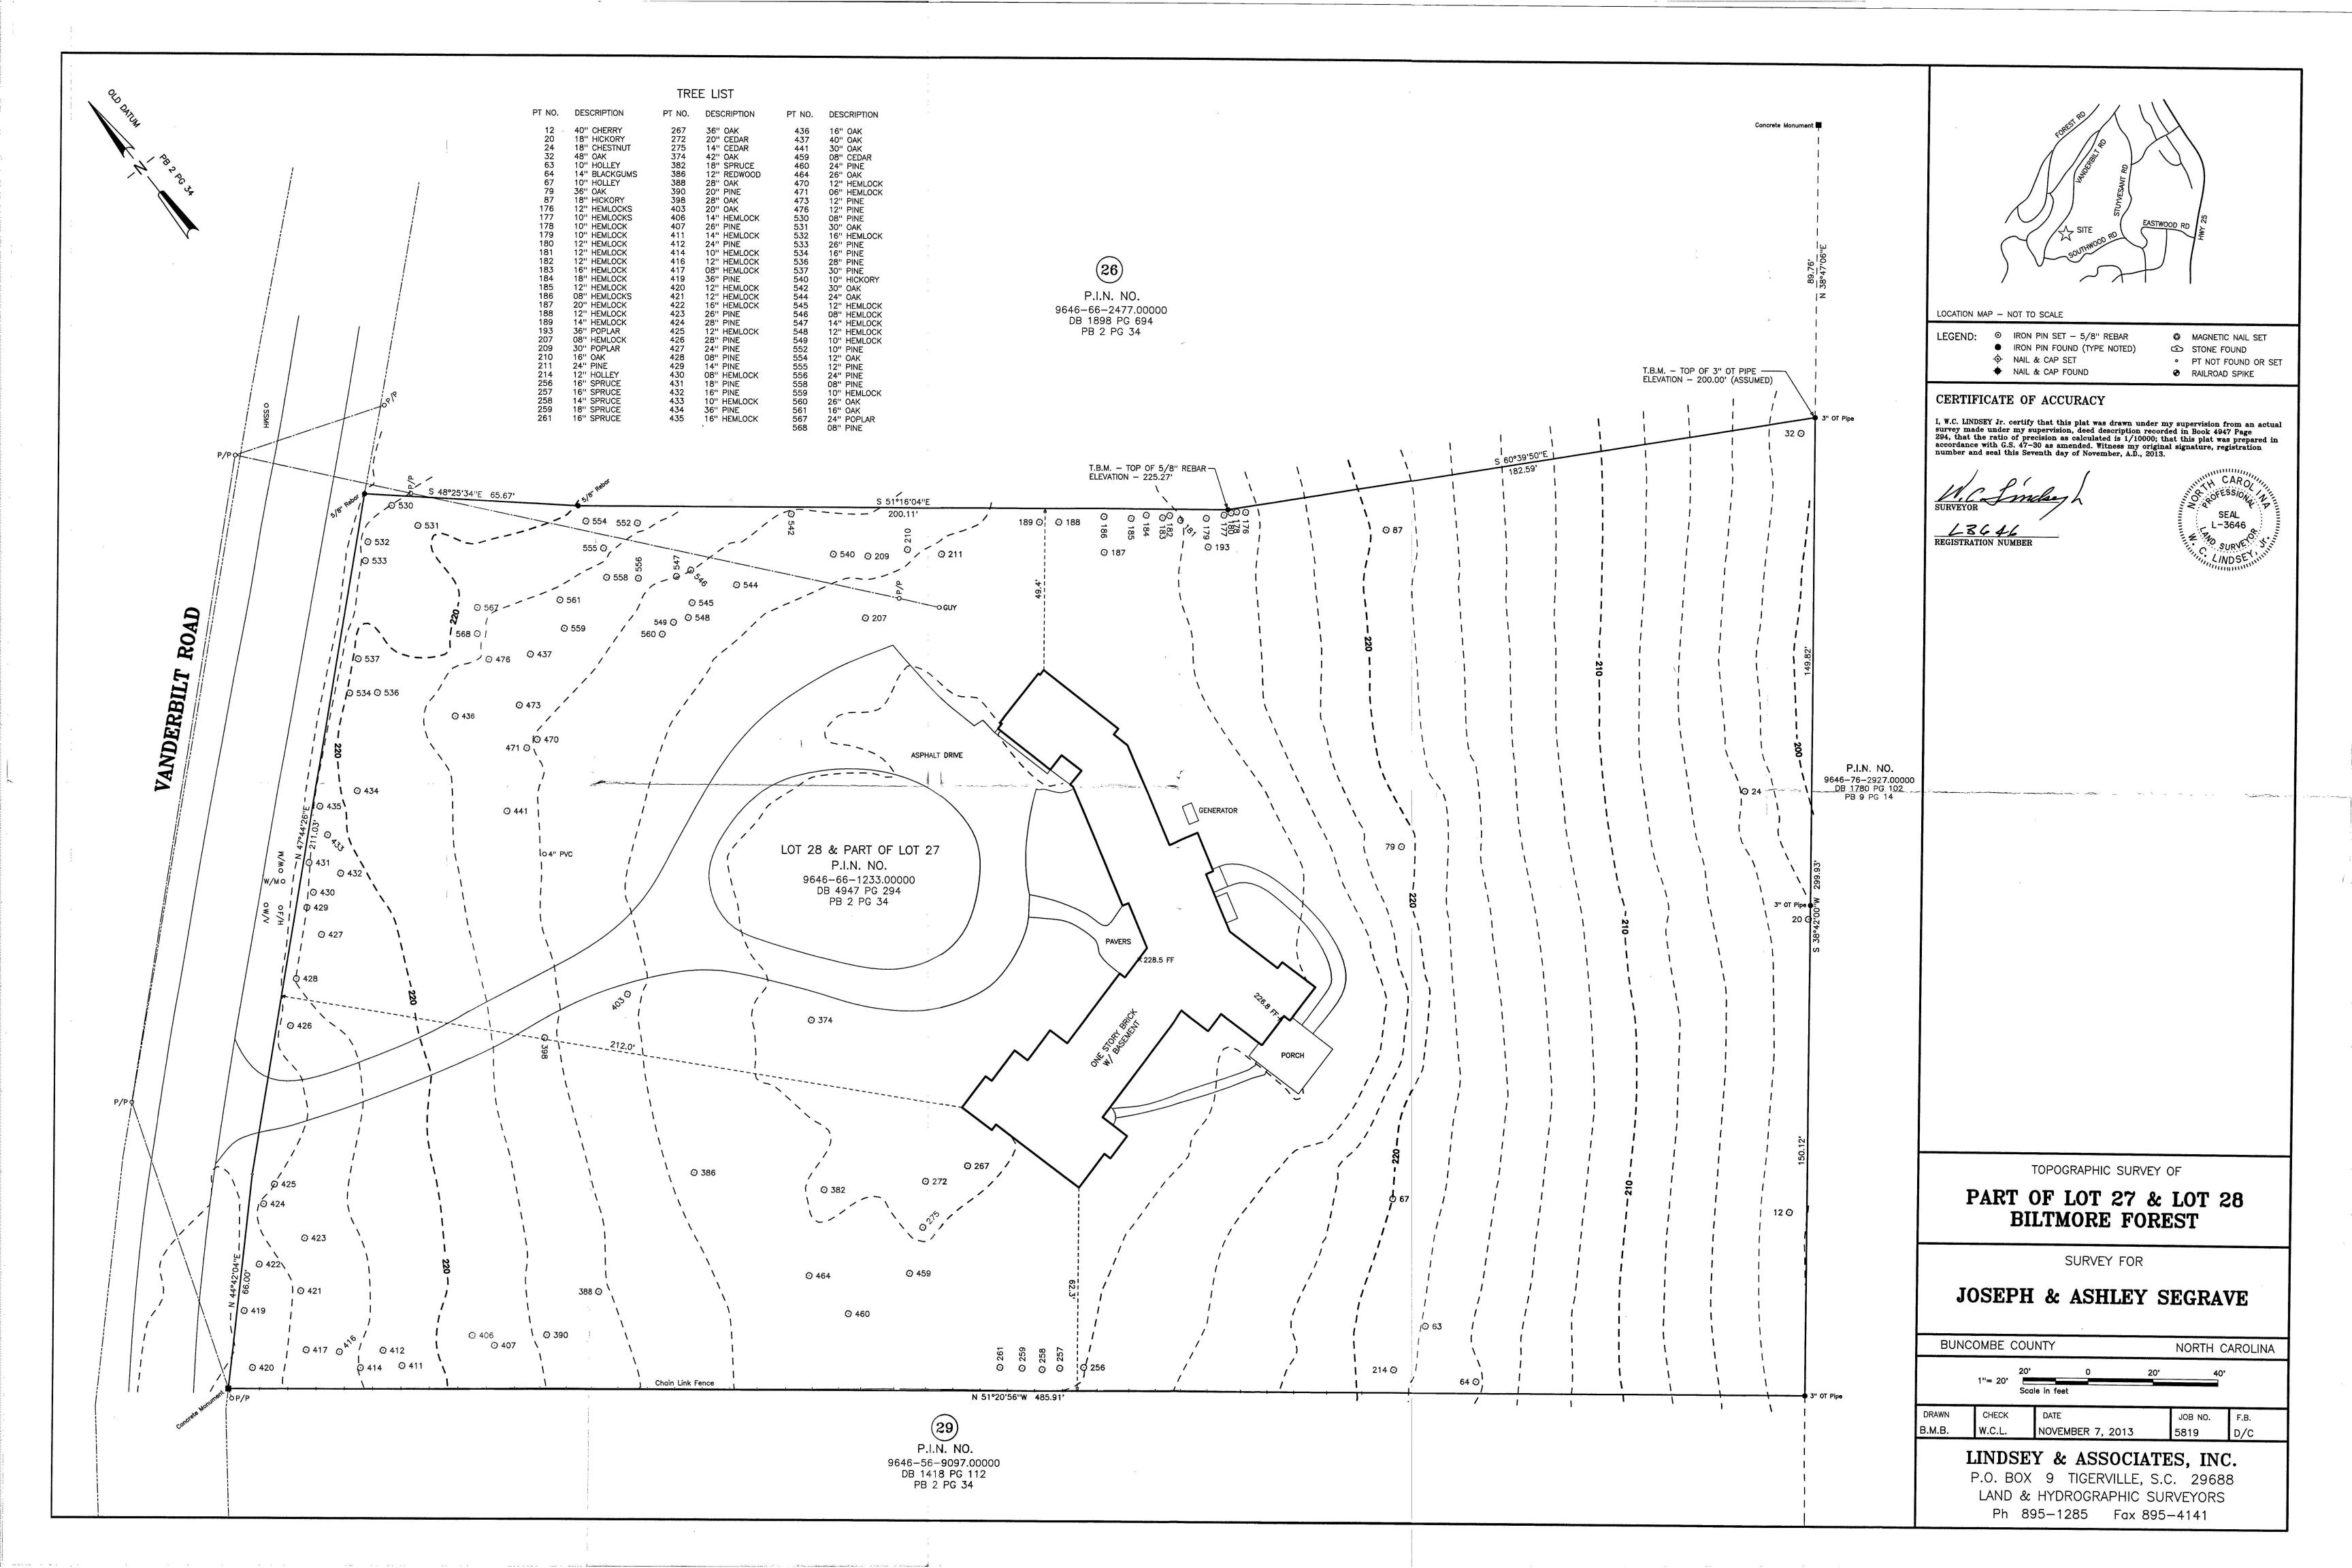

- 2. CONTRACTOR TO ENSURE ALL REQUIRED PERMITS FROM REGULATORY AND REVIEW AGENCIES HAVE BEEN OBTAINED.
- 3. ALL PROJECT ACTIVITY SHALL BE CONFINED TO THE AREA WITHIN THE LIMITS OF DISTURBANCE.
- THERE SHALL BE NO LAY-DOWN ACTIVITIES, MATERIALS STORAGE FOOT TRAFFIC, VEHICULAR TRAFFIC AND STORAGE OF MATERIALS OR EQUIPMENT OUTSIDE OF THE LIMITS OF DISTURBANCE.
- COORDINATE LOCATION OF CONSTRUCTION TRAILER, REST ROOM FACILITIES, PERMIT DISPLAYS AND ANY OTHER PROJECT ACCESSORIES NOT SPECIFICALLY LOCATED ON THE CONSTRUCTION DRAWINGS WITH THE OWNER.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR LOCATING AND PROTECTING EXISTING UTILITIES AND STRUCTURES UNTIL PROJECT INSTALLATION IS COMPLETE. THE CONTRACTOR SHALL REPAIR OR PAY FOR ALL DAMAGES MADE TO EXISTING FACILITIES AND STRUCTURES.
- NOTIFY OWNER IMMEDIATELY IF ANY PROPOSED OR EXISTING CONDITIONS CONFLICT WITH UTILITIES.
- 8. INSTALL EROSION CONTROLS AS INDICATED IN THE EROSION CONTROL NOTES AND SEQUENCE OF CONSTRUCTION FOR EROSION AND SEDIMENT CONTROL.
- MARK TREES AND OTHER PLANT MATERIAL TO BE REMOVED WITH A SINGLE AND UNIQUE COLOR OF SURVEY FLAGGING AND OBTAIN APPROVAL OF OWNER OR LANDSCAPE ARCHITECT PRIOR TO PROCEEDING.
- 10. REMOVE OBSTRUCTIONS, TREES, SHRUBS, GRASS AND OTHER VEGETATION WITHIN THE LIMITS OF DISTURBANCE TO PERMIT INSTALLATION OF NEW CONSTRUCTION UNLESS OTHERWISE NOTED. REMOVAL INCLUDES DIGGING OUT STUMPS AND OBSTRUCTIONS AND GRUBBING ROOTS TO A DEPTH OF 18".
- 11. STRIP TOPSOIL TO WHATEVER DEPTHS ARE ENCOUNTERED IN A MANNER TO PREVENT INTERMINGLING WITH UNDERLYING SUBSOIL OR OTHER WASTE MATERIALS.
- 12. WIRES, SIGNS, PERMITS OR ANY OTHER OBJECT SHALL NOT BE FASTENED TO TREES.
- 13. ALL CLEARING, GRUBBING, REMOVAL OF TOPSOIL OR ANY OTHER DISTURBANCE WITHIN THE DRIPLINE OF EXISTING TREES TO REMAIN SHALL BE DONE WITH HAND TOOLS UNDER THE DIRECTION OF LANDSCAPE ARCHITECT.
- 14. REMOVE SURPLUS SOIL MATERIAL, UNSUITABLE TOPSOIL, OBSTRUCTIONS, DEMOLISHED MATERIALS, AND WASTE MATERIALS, INCLUDING TRASH AND DEBRIS. AND LEGALLY DISPOSE OF THEM OFF OWNER'S PROPERTY

## **EROSION CONTROL NOTES**

- CONTRACTOR IS RESPONSIBLE FOR AND SHALL ADHERE TO ALL PROVISIONS AND REQUIREMENTS OF ALL APPLICABLE EROSION CONTROL REQUIREMENTS.
- 2. EROSION CONTROL MEASURES SHALL BE INSTALLED FOLLOWING THE EROSION CONTROL SEQUENCE
- EROSION CONTROL MEASURES ARE GENERAL IN NATURE. CONTRACTOR IS RESPONSIBLE FOR ADDITIONAL MEASURES AS REQUIRED TO PREVENT ON- OR OFF-SITE RUNOFF AND EROSION.
- 4. ALL INLETS SHALL HAVE TEMPORARY INLET PROTECTION INSTALLED IMMEDIATELY AFTER INLET HAS BEEN CONSTRUCTED.
- CONTRACTOR IS RESPONSIBLE FOR REGULAR INSPECTION AND MAINTENANCE OF EROSION CONTROL MEASURES TO ENSURE THAT MEASURES CONTINUOUSLY FUNCTION AS INTENDED.
- ESTABLISH PERMANENT COVER ON DISTURBED AREAS IMMEDIATELY AFTER FINAL GRADING IS COMPLETE OR IF DISTURBED AREAS ARE TO REMAIN UNALTERED FOR MORE THAN 5 CONSECUTIVE DAYS.
- REMOVE ALL TEMPORARY EROSION CONTROLS AFTER DISTURBED AREAS HAVE BEEN STABILIZED AND COMPLETED.
- 8. CONTRACTOR IS RESPONSIBLE FOR EROSION CONTROL OF OFF-SITE BORROW PITS AND DISPOSAL AREAS
- CONTRACTOR SHALL WATER SITE TO CONTROL DUST DURING PERIODS OF DRY WEATHER.
- $10. \;\;$  EQUIPMENT UTILIZED DURING THE CONSTRUCTION ACTIVITY ON SITE MUST BE OPERATED AND MAINTAINED IN SUCH A MANNER AS TO PREVENT THE POTENTIAL OR ACTUAL POLLUTION OF THE SURFACE OR GROUND WATERS OF THE STATE. FUELS, LUBRICANTS, COOLANTS. AND HYDRAULIC FLUIDS. OR ANY OTHER PETROLEUM PRODUCTS. SHALL NOT BE DISCHARGED INTO THE GROUND OR INTO SURFACE WATERS. SPENT FLUIDS SHALL BE DISPOSED OF IN A MANNER SO AS NOT TO ENTER THE WATERS, SURFACE OR GROUND, OF THE STATE AND IN ACCORDANCE WITH APPLICABLE STATE AND FEDERAL DISPOSAL REGULATIONS. ANY SPILLED FLUIDS SHALL BE CLEANED UP TO THE EXTENT PRACTICABLE AND DISPOSED OF IN A MANNER SO AS NOT TO ALLOW THEIR ENTRY INTO THE WATERS, SURFACE OR GROUND, OF THE STATE.
- 11. HERBICIDE, PESTICIDE AND FERTILIZER USAGE DURING THE CONSTRUCTION ACTIVITY SHALL BE CONSISTENT WITH THE FEDERAL INSECTICIDE, FUNGICIDE AND RODENTICIDE ACT AND SHALL BE IN ACCORDANCE WITH LABEL RESTRICTIONS.
- 12. ALL WASTES COMPOSED OF BUILDING MATERIALS SHALL BE DISPOSED OF IN ACCORDANCE WITH STATE GENERAL STATUTES.

## SEQUENCE OF CONSTRUCTION FOR EROSION & SEDIMENT CONTROL

- OBTAIN PLAN APPROVAL AND OTHER APPLICABLE PERMITS.
- 2. FLAG THE LIMITS OF DISTURBANCE AND MARK THE TREES TO BE REMOVED AND OBTAIN APPROVAL PRIOR TO PROCEEDING.
- 3. HOLD PRE-CONSTRUCTION CONFERENCE AS REQUIRED.
- 4. INSTALL TEMPORARY SILT FENCE AND OTHER EROSION CONTROL MEASURES AS SHOWN WHERE FEASIBLE
- 5. UPON INSTALLATION OF EROSION CONTROL MEASURES, REQUEST ON-SITE INSPECTION AND APPROVAL AS REQUIRED.
- CLEAR AND GRUB SITE.
- 7. BEGIN ROUGH GRADING OF SITE.
- 8. INSTALL ALL CATCH BASINS. INLET PROTECTION, CULVERTS AND OUTLET PROTECTION AS GRADING PERMITS.
- 9. INSTALL STONE BASE AS GRADING PERMITS.
- 10. INSTALL TEMPORARY OR PERMANENT SEEDING OR GROUND COVER ON ALL ROUGH GRADED SLOPES.
- 11. BEGIN FINE GRADING.
- 12. UPON COMPLETION OF FINE GRADING, IMMEDIATELY INSTALL PERMANENT GROUND COVER.
- 13. UPON COMPLETION OF CONSTRUCTION, STABILIZATION OF SITE, AND APPROVAL BY REVIEWING GOVERNMENT AGENCY OR DESIGN REVIEW COMMITTEE. REMOVE ALL TEMPORARY MEASURES AND COMPLETE PERMANENT GROUND COVER.

## MAINTENANCE PLAN:

- A. ALL EROSION AND SEDIMENT CONTROL PRACTICES SHALL BE CHECKED AND MAINTAINED FOR STABILITY AND OPERATION AT OPTIMUM EFFICIENCY FOLLOWING EVERY RUNOFF-PRODUCING RAINFALL BUT IN NO CASE LESS THAN ONCE EVERY WEEK. ANY NEEDED REPAIRS WILL BE MADE IMMEDIATELY TO MAINTAIN ALL PRACTICES AS DESIGNED.
- B. SEDIMENT WILL BE REMOVED FROM BEHIND THE SILT FENCE WHEN IT BECOMES ABOUT 6" DEEP AT THE FENCE. THE SEDIMENT FENCE WILL BE REPAIRED AS NECESSARY TO MAINTAIN A BARRIER.
- C. ALL SEEDED AREAS WILL BE FERTILIZED, RESEEDED AS NECESSARY, AND MULCHED ACCORDING TO SPECIFICATIONS IN THE VEGETATIVE PLAN TO MAINTAIN A VIGOROUS, DENSE VEGETATIVE COVER.

### **GRADING NOTES**

- 1. STAKE GRADES BY A REGISTERED LAND SURVEYOR AND OBTAIN APPROVAL OF LANDSCAPE ARCHITECT OR OWNER PRIOR TO PROCEEDING.
- CONTRACTOR SHALL REVIEW PROPOSED ACTIVITIES ON-SITE WITH LANDSCAPE ARCHITECT OR OWNER PRIOR TO INSTALLATION.
- ALL PROPOSED STORM DRAIN LINES SHALL HAVE A MIN. OF 2' COVER UNLESS OTHERWISE NOTED
- 5. EXCAVATION LIKELY TO DISLOCATE, DAMAGE, OR IMPAIR THE STRENGTH OF EXISTING STRUCTURES SHALL BE CONDUCTED ONLY AFTER ADEQUATE PROTECTION HAS BEEN PROVIDED FOR THE EXISTING STRUCTURES. THE CONTRACTOR SHALL BE

MATERIAL REMAINING FROM PROJECT EXCAVATION SHALL BE LEGALLY DISPOSED OF OFF-SITE BY THE CONTRACTOR

- MATCH EXISTING GRADES SMOOTHLY WHERE PROPOSED FEATURES MEET EXISTING FEATURES.
- 7. THE CONTRACTOR SHALL ENSURE POSITIVE DRAINAGE AT A MINIMUM OF 2% SLOPE AWAY FROM ALL BUILDINGS.

RESPONSIBLE FOR REPAIRS TO OR REPLACEMENT OF STRUCTURES DAMAGED BY PROJECT ACTIVITIES.

- 8. ALL CUT SLOPES GREATER THAN 2:1 & FILL SLOPES GREATER THAN 1.5:1 SHALL BE CERTIFIED BY A REGISTERED GEOTECHNICAL ENGINEER PRIOR TO AND DURING CONSTRUCTION.
- 9. ALL PVC SLEEVES TO BE SCHEDULE 80. COORDINATE WITH LANDSCAPE ARCHITECT FOR NUMBER AND LOCATION, EVEN IF SHOWN ON THE PLAN.
- 10. ABBREVIATIONS

· • •	7110110			
	TW:	ELEVATION AT TOP OF WALL	TC:	ELEVATION AT TOP OF CURB
	BW:	FINISHED GRADE ELEVATION AT BOTTOM OF WALL	BC:	ELEVATION AT BOTTOM OF CURB
	SWCP:	SMOOTH WALL CORRUGATED PLASTIC PIPE	TS:	ELEVATION AT TOP OF STEPS
	RIM:	FINISHED ELEVATION AT RIM INLET OF DRAINAGE STRUCTURES	BS:	ELEVATION AT BOTTOM OF STEPS
	INV:	PIPE INVERT	MIN:	MINIMUM
	TYP:	TYPICAL	MAX:	MAXIMUM

- 11. PRUNE TREE ROOTS EXPOSED DURING GRADE LOWERING. DO NOT CUT MAIN LATERAL ROOTS OR TAP ROOTS; CUT ONLY SMALLER ROOTS. CUT ROOTS WITH SHARP PRUNING INSTRUMENTS; DO NOT BREAK OR CHOP.
- 12. WHERE EXISTING GRADE IS 6 INCHES OR LESS BELOW ELEVATION OF FINISH GRADE, FILL WITH TOPSOIL. PLACE TOPSOIL IN A SINGLE UNCOMPACTED LAYER, HAND GRADE AND LIGHTLY TAMP TO REQUIRED FINISH ELEVATIONS.
- 13. PROVIDE BORROW SOIL MATERIALS WHEN SUFFICIENT SATISFACTORY SOIL MATERIALS ARE NOT AVAILABLE.
- 14. SATISFACTORY SOILS SHALL BE DEFINED AS FOLLOWS: ASTM D 2487 SOIL CLASSIFICATION GROUPS SC, ML, CL, SP, GM AND SM OR A COMBINATION OF THESE GROUP SYMBOLS; FREE OF ROCK OR GRAVEL LARGER THAN 3" IN ANY DIMENSION, DEBRIS, WASTE, FROZEN MATERIALS, VEGETATION, AND OTHER DELETERIOUS MATTER.
- 15. UNSATISFACTORY SOILS SHALL BE DEFINED AS FOLLOWS: ASTM D 2487 SOIL CLASSIFICATION GROUPS GC, GW, GP, MH, CH, OL, OH, SW AND PT OR A COMBINATION OF THESE GROUP SYMBOLS.
- 16. UNSATISFACTORY SOILS ALSO INCLUDE SATISFACTORY SOILS NOT MAINTAINED WITHIN 2 PERCENT OF OPTIMUM MOISTURE CONTENT AT TIME OF COMPACTION.
- 17. BACKFILL AND FILL SHALL BE SATISFACTORY SOILS.
- 18. SUBMIT MATERIAL TEST REPORTS FROM A QUALIFIED TESTING AGENCY INDICATING AND INTERPRETING TEST RESULTS FOR COMPLIANCE WITH THE FOLLOWING REQUIREMENTS:
- CLASSIFICATION ACCORDING TO ASTM D 2487 OF EACH ON-SITE OR BORROW SOIL MATERIAL PROPOSED FOR FILL AND BACKFILL LABORATORY COMPACTION CURVE ACCORDING TO ASTM D 698 FOR EACH ON-SITE OR BORROW SOIL MATERIAL PROPOSED FOR
- 19. GEOTECHNICAL TESTING AGENCY QUALIFICATIONS: AN INDEPENDENT TESTING AGENCY QUALIFIED ACCORDING TO ASTM 329 TO CONDUCT SOIL MATERIALS AND ROCK-DEFINITION TESTING, AS DOCUMENTED ACCORDING TO ASTM D 3740 AND ASTM E 548.
- 20. NOTIFY AND OBTAIN APPROVAL FROM LANDSCAPE ARCHITECT PRIOR TO PROCEEDING WHEN EXCAVATIONS HAVE REACHED REQUIRED SUBGRADE.
- 21. PROOF ROLL SUBGRADE WITH SUITABLE EQUIPMENT TO IDENTIFY SOFT POCKETS AND AREAS OF EXCESS YIELDING. DO NOT PROOF ROLL WET OR SATURATED SUBGRADES.
- 22. RECONSTRUCT SUBGRADES DAMAGED BY FREEZING TEMPERATURES, FROST, RAIN, ACCUMULATED WATER, OR CONSTRUCTION ACTIVITIES AS DIRECTED BY GEOTECHNICAL ENGINEER.
- 23. PLACE AND COMPACT BACKFILL IN EXCAVATIONS PROMPTLY BUT NOT BEFORE REMOVING TRASH AND DEBRIS.
- 24. WHEN INSTALLING FILL:
- REMOVE VEGETATION, TOPSOIL, DEBRIS, UNSATISFACTORY SOIL MATERIALS, OBSTRUCTION, AND DELETERIOUS MATERIALS FROM GROUND SURFACE BEFORE PLACING FILLS PLOW, SCARIFY, BENCH OR BREAK UP SLOPED SURFACES STEEPER THAN 4:1 SO FILL MATERIAL WILL BOND WITH EXISTING
- PLACE AND COMPACT FILL MATERIAL IN LAYERS TO REQUIRED ELEVATIONS AND COMPACTION.
- 25. UNIFORMLY MOISTEN OR AERATE SUBGRADE AND EACH SUBSEQUENT FILL OR BACKFILL LAYER BEFORE COMPACTION TO WITHIN 2% OF OPTIMUM MOISTURE CONTENT.
- 26. DO NOT PLACE BACKFILL OR FILL ON SURFACES THAT ARE MUDDY, FROZEN, OR CONTAIN FROST OR ICE.
- 27. REMOVE, REPLACE, OR SCARIFY OR AIR-DRY, OTHERWISE SATISFACTORY SOIL MATERIAL THAT EXCEEDS OPTIMUM MOISTURE CONTENT BY 2% AND IS TOO WET TO COMPACT TO SPECIFIED DRY UNIT WEIGHT.
- 28. PLACE BACKFILL AND FILL MATERIALS IN LAYERS NOT MORE THAN 8" IN LOOSE DEPTH FOR MATERIAL COMPACTED BY HEAVY COMPACTION EQUIPMENT, AND NOT MORE THAN 4" IN LOOSE DEPTH FOR MATERIAL COMPACTED BY HAND-OPERATED TAMPERS.
- THE FULL LENGTH OF EACH STRUCTURE. 30. COMPACT SOIL TO NOT LESS THAN THE FOLLOWING PERCENTAGES OF MAXIMUM DRY UNIT WEIGHT ACCORDING TO ASTM D 698: UNDER STRUCTURES AND PAVEMENTS, COMPACT TOP 12" OF EXISTING SUBGRADE AND EACH LAYER OF BACKFILL OR FILL

29. PLACE BACKFILL AND FILL MATERIALS EVENLY ON ALL SIDES OF STRUCTURES TO REQUIRED ELEVATIONS, AND UNIFORMLY ALONG

- UNDER UNPAVED AREAS, COMPACT TOP 6" BELOW SUBGRADE AND COMPACT EACH LAYER OF BACKFILL OR FILL MATERIAL AT
- 31. FINISH SUBGRADES TO REQUIRED ELEVATIONS WITHIN THE FOLLOWING TOLERANCES:
- LAWN OR UNPAVED AREAS: PLUS OR MINUS 1" - PAVEMENTS: PLUS OR MINUS 1/10"

UNTIL SPECIFIED COMPACTION IS OBTAINED.

- 32. CONTRACTOR WILL ENGAGE A QUALIFIED INDEPENDENT GEOTECHNICAL ENGINEERING TESTING AGENCY TO PERFORM FIELD QUALITY-CONTROL TESTING. SUBMIT TEST REPORTS TO LANDSCAPE ARCHITECT OR OWNER.
- 33. ALLOW TESTING AGENCY TO INSPECT AND TEST SUBGRADES AND EACH FILL AND BACKFILL LAYER. PROCEED WITH SUBSEQUENT EARTHWORK ONLY AFTER TEST RESULTS FOR PREVIOUSLY COMPLETED WORK COMPLY WITH REQUIREMENTS.
- 34. TESTING AGENCY WILL TEST COMPACTION OF SOILS IN PLACE ACCORDING TO ASTM D 1556, ASTM D 2167, ASTM D 2922, AND ASTM D 2937 AS APPLICABLE.

35. WHEN TESTING AGENCY REPORTS THAT SUBGRADES, FILLS, OR BACKFILLS HAVE NOT ACHIEVED DEGREE OF COMPACTION

36. PREVENT WATER AND SUBSURFACE OR GROUND WATER FROM ENTERING EXCAVATIONS, FROM PONDING ON PREPARED SUBGRADES EXCAVATE UTILITY TRENCHES TO INDICATED SLOPES, LINES DEPTHS AND INVERT ELEVATIONS OF UNIFORM WIDTHS TO PROVIDE A MAXIMUM 12 INCHES OF WORKING CLEARANCE ON EACH SIDE OF PIPE OR CONDUIT. EXCAVATE TRENCH WALLS VERTICALLY FROM TRENCH BOTTOM TO 12 INCHES HIGHER THAN THE TOP OF PIPE OR CONDUIT.

SPECIFIED, SCARIFY AND MOISTEN OR AERATE, OR REMOVE AND REPLACE SOIL TO DEPTH REQUIRED, RECOMPACT AND RETEST

## **GRADING NOTES CONT**

- 37. EXCAVATE AND SHAPE TRENCH SUBGRADE TO PROVIDE UNIFORM BEARING AND CONTINUOUS SUPPORT FOR PIPE AND CONDUIT. WHERE ENCOUNTERING ROCK OR OTHER UNYIELDING BEARING SURFACE, CARRY TRENCH EXCAVATION 6 INCHES BELOW INVERT ELEVATION TO RECEIVE BEDDING COURSE.
- 38. FILL UNAUTHORIZED EXCAVATION UNDER FOUNDATIONS OR WALL FOOTINGS BY EXTENDING INDICATED BOTTOM ELEVATION OF CONCRETE FOUNDATION OR FOOTING TO EXCAVATION BOTTOM, WITHOUT ALTERING REQUIRED TOP ELEVATION. FILL UNAUTHORIZED EXCAVATIONS UNDER CONSTRUCTION AS DIRECTED BY GEOTECHNICAL ENGINEER.
- 39. UTILITY TRENCH BACKFILL: PLACE, COMPACT AND SHAPE BEDDING COURSE TO PROVIDE CONTINUOUS SUPPORT FOR PIPES AND CONDUITS OVER ROCK AND OTHER UNYIELDING BEARING SURFACES AND TO FILL UNAUTHORIZED EXCAVATIONS.
- 40. INSTALL UNDERGROUND UTILITY WARNING TAPE DIRECTLY ABOVE UTILITIES, 12 INCHES BELOW FINISHED GRADE AND IN THE SAME TRENCH FOR OPEN AREAS, INSTALL 6 INCHES BELOW SUBGRADE UNDER PAVEMENTS AND SLABS OR AS REQUIRED.
- 41. FOUNDATION DRAINS TO BE INSTALLED INDEPENDENT OF ANY OTHER DRAINS SHOWN ON SITE PLAN.


### LAYOUT AND MATERIALS NOTES

- DO NOT SCALE FROM DRAWINGS.
- OBTAIN DIGITAL CAD FILES FROM LANDSCAPE ARCHITECT FOR STAKING BY REGISTERED LAND SURVEYOR.
- 3. CONTRACTOR TO HAVE A REGISTERED LAND SURVEYOR STAKE SITE ELEMENTS. OBTAIN APPROVAL BY LANDSCAPE ARCHITECT PRIOR TO PROCEEDING
- 4. ALL DIMENSIONS ARE TO FACE OF WALL, FACE OF CURB OR EDGE OF PAVING UNLESS OTHERWISE NOTED
- 5. CONTACT LANDSCAPE ARCHITECT IMMEDIATELY IF LAYOUT CONFLICTS OR AMBIGUITIES ARISE
- 6. STORE AND PROTECT MATERIALS PER MANUFACTURER'S RECOMMENDATIONS
- 7. CONTRACTOR WILL ENGAGE A QUALIFIED INDEPENDENT GEOTECHNICAL ENGINEERING TESTING AGENCY TO PERFORM FIELD QUALITY-CONTROL TESTING ON MATERIALS AND INSTALLATION WHERE SPECIFIED.
- 8. PROVIDE TEST RESULTS FOR COMPACTION OF AGGREGATE BASE COURSE IN ACCORDANCE WITH ASTM D 1556 OR ASTM D 2167 WHICHEVER IS MOST APPLICABLE.
- 9. CONCRETE FORMS SHALL BE STEEL, WOOD OR OTHER SUITABLE MATERIAL OF SIZE AND STRENGTH TO RESIST MOVEMENT DURING CONCRETE PLACEMENT AND TO RETAIN HORIZONTAL AND VERTICAL ALIGNMENT UNTIL REMOVAL. USE FLEXIBLE SPRING STEEL FORMS OR LAMINATED BOARDS TO FORM RADIUS BENDS AS REQUIRED.
- 10. DO NOT BUILD ON FROZEN SUBGRADE OR SETTING BEDS. REMOVE AND REPLACE MASONRY WORK DAMAGED BY FROST OR FREEZING.
- 11. HVAC UNITS, PROPANE TANKS, GENERATORS, OR OTHER UTILITY STRUCTURES MAY OR MAY NOT BE SHOWN ON SITE PLAN. CONTRACTOR SHALL COORDINATE LOCATION OF THESE UNITS WITH LANDSCAPE ARCHITECT AND HVAC CONTRACTOR INCOORDINATION WITH ARCHITECT OR BUILDING DESIGNER

IN	COORDINATION WITH ARCHITECT	OR BUILDING DESIGNER.					
	TEMPORARY SEEDING S	CHEDULE		EDING SCHEDULE AS FROM 3:1 TO 2:1 SLOPE)			
	Seeding mixture:		Seeding mixture:				
	SPECIES	RATE (lb/acre)	Species	Rate (lb/acre)			
SUMMER LATE WINTER & EARLY SPRING FALL Z	Rye (grain)	120	Tall Fescue (KY-31)	100			
FAI	Seeding dates:	Aug 15 Dog 15	Andropogon temarius - Splitbeard Bluestem	20			
	Mountains: Coastal Plain & Piedmont:	Aug. 15 - Dec. 15 Aug. 15 - Dec. 30	Chamaecrista fasciculata - Partridge Pea	10			
	Seeding mixture:		Redtop	5			
อ	SPECIES	RATE (lb/acre)	Kentucky Bluegrass	5			
PRII	Rye (grain)	120	Nurse plants:				
.≺ S	Annual lespedeza (Kobe in Piedmo	nt & <sub>50</sub>	Between May 1 and Aug. 15 ac	ld 10 lb/acre German millet or			
ARL	Coastal Plain, Korean in Mountains *Omit annual lespedeza when duration of ter	)	15 lb/acre Sudangrass.				
	beyond June.	nporary cover is not to extend	Prior to May 1 or Aug. 15, add 4	40 lh/acre rve (grain)			
ĒR	Seeding dates:		Seeding dates:	is is, as is the (grain).			
N N	Mountains (above 2500 ft):	Feb. 15 - May 15	Below 2500 ft:	Aug. 15 - Sept. 1			
<b> </b>	Mountains (below 2500 ft):	Feb. 1 - May 1	Above 2500 ft:	July 25 - Aug. 15			
₹	Piedmont:	Jan. 1 - May 1	Complete seeding earlier in fall and start later in spring on north and east-facing				
	Coastal Plain:	Dec. 1 - April 15	slopes.				
	Seeding mixture:						
	SPECIES	RATE (lb/acre)	Soil Amendments:				
	German millet	40	Apply lime and fertilizer accord	ing to soil tests or apply 4,000 stone and 1,000 lb/acre 5-10-10			
/ER	*In the Piedmont & Mountains, a small-stemmed Sudangrass may be substituted at a rate of 50 lb/acre.		fertilizer.	Storie and 1,000 ib/acre 3-10-10			
IM O	Seeding dates:						
00	Mountains:	May 15 - Aug 15	Mulch:	a strang or a suivalent sever of			
	Piedmont:	May 1 - Aug 15	Apply 4,000-5,000 lb/acre grain another suitable mulching mate				
	Coastal Plain:	April 15 - Aug 15	with asphalt, roving, or netting.	, ,			
	Cail Amandmanta		adequate mulch shall be the re	•			
	Soil Amendments: Follow recommendation of soil tests	or apply 2 000 lb/acre	steep slopes (greater than 2:1).				
	ground agricultural limestone and 7		SC150BN netting or North American Green Hydromax CM mulch may be used. Alternatives may be approved on a case				
	For Fall applications modify 10-10-1		by case basis.	по претотой от и опос			
	Mulch:		Maintananas				
	Apply 4,000 lb/acre straw. Anchor s	traw by tacking with asphalt,	Maintenance:				
	netting, or a mulch anchoring tool. A	-	Mow no more than once a year unless growth is fully adequate	Re-fertilize in the second year			
	straight can be used as a mulch and	choring tool.	damaged areas immediately.	. Reseed, lertilize, and mulch			
	Maintenance:						
	Refertilize if growth is not fully adeq	uate. Reseed, refertilize, and	DEDMANIENT SE	EDING SCHEDI II E			
	mulch immediately following erosion	n or other damage.	PERMANENT SEEDING SCHEDULE (GRASSED AREAS UP TO 3:1 SLOPE)				
			(ONASSED AREA	10 0.1 0LOFL)			
			Seeding mixture:				
			Species	Rate (lb/acre)			
			Tall fescue blend	200 250			
			(agual parta I/V 24.9 Dahal 2)	200-250			





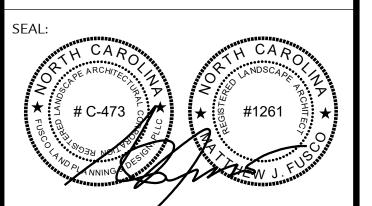

DRAWN BY: CHECKED BY: MJF

Z S Ø

PLANNIN

00

Š

ISSUE DATE: 09/09/2021 Revision / Issue Copyright © 2018, Fusco Land Planning & Design, PLLC

SHEET TITLE:

SHEET NO:

steep slopes.

(equal parts KY-31 & Rebel 2)

Aug. 15 - Sept. 1

July 25 - Aug. 15

Apply lime and fertilizer according to soil tests or apply 4,000

Apply 3,000-4,000 lb/acre grain straw or equivalent cover of

The bunch-type habit of tall fescue restricts its spread into

damaged areas. Reseed bare spots in the fall. Re-fertilize

mulch damaged areas immediately.

annually in late winter and again in fall. Reseed, fertilize, and

another suitable mulch. Anchor mulch by tacking with asphalt,

roving, or netting. Netting is the preferred anchoring method on

lb/acre ground agricultural limestone and 1,200 lb/acre

Seeding dates:

Below 2500 ft:

Above 2500 ft:

Soil Amendments:

10-10-10 fertilizer.

Implementing the details and specifications on this plan sheet will result in the construction activity being considered compliant with the Ground Stabilization and Materials Handling sections of the NCG01 Construction General Permit (Sections E and F, respectively). The permittee shall comply with the Erosion and Sediment Control plan approved by the delegated authority having jurisdiction. All details and specifications shown on this sheet may not apply depending on site conditions and the delegated authority having jurisdiction.

### SECTION E: GROUND STABILIZATION

	Required Ground Stabilization Timeframes						
Si	te Area Description	Stabilize within this many calendar days after ceasing land disturbance	Timeframe variations				
(a)	Perimeter dikes, swales, ditches, and perimeter slopes	7	None				
(b)	High Quality Water (HQW) Zones	7	None				
(c)	Slopes steeper than 3:1	7	If slopes are 10' or less in length and are not steeper than 2:1, 14 days are allowed				
(d)	Slopes 3:1 to 4:1	14	-7 days for slopes greater than 50' in length and with slopes steeper than 4:1 -7 days for perimeter dikes, swales, ditches, perimeter slopes and HQW Zones -10 days for Falls Lake Watershed				
(e)	Areas with slopes flatter than 4:1	14	-7 days for perimeter dikes, swales, ditches, perimeter slopes and HQW Zones -10 days for Falls Lake Watershed unless there is zero slope				

**Note:** After the permanent cessation of construction activities, any areas with temporary ground stabilization shall be converted to permanent ground stabilization as soon as practicable but in no case longer than 90 calendar days after the last land disturbing activity. Temporary ground stabilization shall be maintained in a manner to render the surface stable against accelerated erosion until permanent ground stabilization is achieved.

## GROUND STABILIZATION SPECIFICATION

Stabilize the ground sufficiently so that rain will not dislodge the soil. Use one of the techniques in the table below:

Temporary Stabilization	Permanent Stabilization
<ul> <li>Temporary grass seed covered with straw or other mulches and tackifiers</li> <li>Hydroseeding</li> <li>Rolled erosion control products with or</li> </ul>	<ul> <li>Permanent grass seed covered with straw or other mulches and tackifiers</li> <li>Geotextile fabrics such as permanent soil reinforcement matting</li> </ul>
<ul> <li>without temporary grass seed</li> <li>Appropriately applied straw or other mulch</li> <li>Plastic sheeting</li> </ul>	<ul> <li>Hydroseeding</li> <li>Shrubs or other permanent plantings covered with mulch</li> </ul>
	<ul> <li>Uniform and evenly distributed ground cover sufficient to restrain erosion</li> <li>Structural methods such as concrete, asphalt or retaining walls</li> </ul>

## POLYACRYLAMIDES (PAMS) AND FLOCCULANTS

- 1. Select flocculants that are appropriate for the soils being exposed during construction, selecting from the NC DWR List of Approved PAMS/Flocculants.
- 2. Apply flocculants at or before the inlets to Erosion and Sediment Control Measures.
- 3. Apply flocculants at the concentrations specified in the NC DWR List of Approved PAMS/Flocculants and in accordance with the manufacturer's instructions.
- 4. Provide ponding area for containment of treated Stormwater before discharging offsite
- 5. Store flocculants in leak-proof containers that are kept under storm-resistant cover or surrounded by secondary containment structures.

## **EQUIPMENT AND VEHICLE MAINTENANCE**

- 1. Maintain vehicles and equipment to prevent discharge of fluids.
- 2. Provide drip pans under any stored equipment.
- 3. Identify leaks and repair as soon as feasible, or remove leaking equipment from the project.
- 4. Collect all spent fluids, store in separate containers and properly dispose as hazardous waste (recycle when possible).
- Remove leaking vehicles and construction equipment from service until the problem has been corrected.
- 6. Bring used fuels, lubricants, coolants, hydraulic fluids and other petroleum products to a recycling or disposal center that handles these materials.

### LITTER, BUILDING MATERIAL AND LAND CLEARING WASTE

- 1. Never bury or burn waste. Place litter and debris in approved waste containers.
- 2. Provide a sufficient number and size of waste containers (e.g dumpster, trash receptacle) on site to contain construction and domestic wastes.
- 3. Locate waste containers at least 50 feet away from storm drain inlets and surface waters unless no other alternatives are reasonably available.
- 4. Locate waste containers on areas that do not receive substantial amounts of runoff from upland areas and does not drain directly to a storm drain, stream or wetland.
- 5. Cover waste containers at the end of each workday and before storm events or provide secondary containment. Repair or replace damaged waste containers.
- 6. Anchor all lightweight items in waste containers during times of high winds.
- 7. Empty waste containers as needed to prevent overflow. Clean up immediately if containers overflow.
- 8. Dispose waste off-site at an approved disposal facility.
- 9. On business days, clean up and dispose of waste in designated waste containers.

### PAINT AND OTHER LIQUID WASTE

- 1. Do not dump paint and other liquid waste into storm drains, streams or wetlands.
- 2. Locate paint washouts at least 50 feet away from storm drain inlets and surface waters unless no other alternatives are reasonably available.
- Contain liquid wastes in a controlled area.
- 4. Containment must be labeled, sized and placed appropriately for the needs of site.
- Prevent the discharge of soaps, solvents, detergents and other liquid wastes from construction sites.


## PORTABLE TOILETS

- 1. Install portable toilets on level ground, at least 50 feet away from storm drains, streams or wetlands unless there is no alternative reasonably available. If 50 foot offset is not attainable, provide relocation of portable toilet behind silt fence or place on a gravel pad and surround with sand bags.
- 2. Provide staking or anchoring of portable toilets during periods of high winds or in high
- Monitor portable toilets for leaking and properly dispose of any leaked material. Utilize a licensed sanitary waste hauler to remove leaking portable toilets and replace with properly operating unit.

## EARTHEN STOCKPILE MANAGEMENT

- Show stockpile locations on plans. Locate earthen-material stockpile areas at least 50 feet away from storm drain inlets, sediment basins, perimeter sediment controls and surface waters unless it can be shown no other alternatives are reasonably available.
- Protect stockpile with silt fence installed along toe of slope with a minimum offset of five feet from the toe of stockpile.
- Provide stable stone access point when feasible.
- Stabilize stockpile within the timeframes provided on this sheet and in accordance with the approved plan and any additional requirements. Soil stabilization is defined as vegetative, physical or chemical coverage techniques that will restrain accelerated erosion on disturbed soils for temporary or permanent control needs.



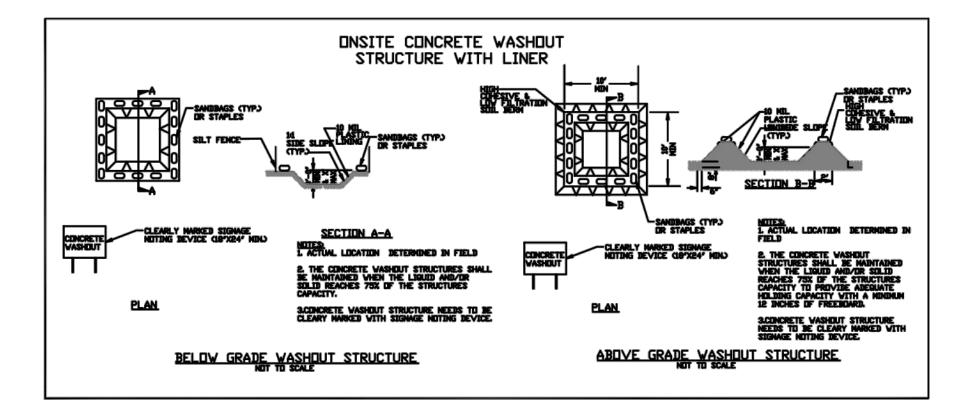

## CONCRETE WASHOUTS

- 1. Do not discharge concrete or cement slurry from the site.
- 2. Dispose of, or recycle settled, hardened concrete residue in accordance with local and state solid waste regulations and at an approved facility.
- Manage washout from mortar mixers in accordance with the above item and in addition place the mixer and associated materials on impervious barrier and within lot perimeter silt fence.
- Install temporary concrete washouts per local requirements, where applicable. If an alternate method or product is to be used, contact your approval authority for review and approval. If local standard details are not available, use one of the two types of temporary concrete washouts provided on this detail.
- 5. Do not use concrete washouts for dewatering or storing defective curb or sidewalk sections. Stormwater accumulated within the washout may not be pumped into or discharged to the storm drain system or receiving surface waters. Liquid waste must be pumped out and removed from project.
- Locate washouts at least 50 feet from storm drain inlets and surface waters unless it can be shown that no other alternatives are reasonably available. At a minimum, install protection of storm drain inlet(s) closest to the washout which could receive spills or overflow.
- Locate washouts in an easily accessible area, on level ground and install a stone entrance pad in front of the washout. Additional controls may be required by the approving authority.
- 8. Install at least one sign directing concrete trucks to the washout within the project limits. Post signage on the washout itself to identify this location.
- Remove leavings from the washout when at approximately 75% capacity to limit overflow events. Replace the tarp, sand bags or other temporary structural components when no longer functional. When utilizing alternative or proprietary products, follow manufacturer's instructions.
- 10. At the completion of the concrete work, remove remaining leavings and dispose of in an approved disposal facility. Fill pit, if applicable, and stabilize any disturbance caused by removal of washout.

## HERBICIDES, PESTICIDES AND RODENTICIDES

- 1. Store and apply herbicides, pesticides and rodenticides in accordance with label restrictions.
- 2. Store herbicides, pesticides and rodenticides in their original containers with the label, which lists directions for use, ingredients and first aid steps in case of accidental poisoning.
- Do not store herbicides, pesticides and rodenticides in areas where flooding is possible or where they may spill or leak into wells, stormwater drains, ground water or surface water. If a spill occurs, clean area immediately.
- Do not stockpile these materials onsite.

## **HAZARDOUS AND TOXIC WASTE**


- 1. Create designated hazardous waste collection areas on-site.
- 2. Place hazardous waste containers under cover or in secondary containment.
- Do not store hazardous chemicals, drums or bagged materials directly on the ground.

## NCG01 GROUND STABILIZATION AND MATERIALS HANDLING

EFFECTIVE: 04/01/19

Westmore



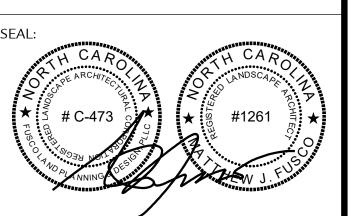

**DRAWN BY:** 

CHECKED BY: MJF

RESIDENCE

SIGN, DE PLANNING WEILBAECHER

FUSCO

ISSUE DATE: 09/09/2021				
No.	Revision / Issue	Date		
Copyright © 2018, Fusco Land Planning & Design, PLLC				

SHEET TITLE:

Ground Stabilization & Materials Handling

SHEET NO:

L1.02

Rolled erosion control products with grass seed

## SELF-INSPECTION, RECORDKEEPING AND REPORTING

### **SECTION A: SELF-INSPECTION**

Self-inspections are required during normal business hours in accordance with the table below. When adverse weather or site conditions would cause the safety of the inspection personnel to be in jeopardy, the inspection may be delayed until the next business day on which it is safe to perform the inspection. In addition, when a storm event of equal to or greater than 1.0 inch occurs outside of normal business hours, the self-inspection shall be performed upon the commencement of the next business day. Any time when inspections were delayed shall be noted in the Inspection Record.

Inspect	Frequency (during normal business hours)	Inspection records must include:
(1) Rain gauge maintained in good working order	Daily	Daily rainfall amounts.  If no daily rain gauge observations are made during weekend of holiday periods, and no individual-day rainfall information available, record the cumulative rain measurement for those unattended days (and this will determine if a site inspection needed). Days on which no rainfall occurred shall be recorded a "zero." The permittee may use another rain-monitoring device approved by the Division.
(2) E&SC Measures	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	<ol> <li>Identification of the measures inspected,</li> <li>Date and time of the inspection,</li> <li>Name of the person performing the inspection,</li> <li>Indication of whether the measures were operating properly,</li> <li>Description of maintenance needs for the measure,</li> <li>Description, evidence, and date of corrective actions taken.</li> </ol>
(3) Stormwater discharge outfalls (SDCs)	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	<ol> <li>Identification of the discharge outfalls inspected,</li> <li>Date and time of the inspection,</li> <li>Name of the person performing the inspection,</li> <li>Evidence of indicators of stormwater pollution such as oil sheen, floating or suspended solids or discoloration,</li> <li>Indication of visible sediment leaving the site,</li> <li>Description, evidence, and date of corrective actions taken.</li> </ol>
(4) Perimeter of site	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	<ol> <li>If visible sedimentation is found outside site limits, then a record of the following shall be made:</li> <li>Actions taken to clean up or stabilize the sediment that has lef the site limits,</li> <li>Description, evidence, and date of corrective actions taken, an</li> <li>An explanation as to the actions taken to control future releases.</li> </ol>
(5) Streams or wetlands onsite or offsite (where accessible)	At least once per 7 calendar days and within 24 hours of a rain event ≥ 1.0 inch in 24 hours	If the stream or wetland has increased visible sedimentation or a stream has visible increased turbidity from the construction activity, then a record of the following shall be made:  1. Description, evidence and date of corrective actions taken, and 2. Records of the required reports to the appropriate Division Regional Office per Part III, Section C, Item (2)(a) of this permit
(6) Ground stabilization measures	After each phase of grading	<ol> <li>The phase of grading (installation of perimeter E&amp;SC measures, clearing and grubbing, installation of storm drainage facilities, completion of all land-disturbing activity, construction or redevelopment, permanent ground cover).</li> <li>Documentation that the required ground stabilization measures have been provided within the required timeframe or an assurance that they will be provided as soon as possible.</li> </ol>

NOTE: The rain inspection resets the required 7 calendar day inspection requirement.

## PART III

### SELF-INSPECTION, RECORDKEEPING AND REPORTING

### SECTION B: RECORDKEEPING

## 1. E&SC Plan Documentation

The approved E&SC plan as well as any approved deviation shall be kept on the site. The approved E&SC plan must be kept up-to-date throughout the coverage under this permit. The following items pertaining to the E&SC plan shall be kept on site and available for inspection at all times during normal business hours.

Item to Document	Documentation Requirements
(a) Each E&SC measure has been installed and does not significantly deviate from the locations, dimensions and relative elevations shown on the approved E&SC plan.	Initial and date each E&SC measure on a copy of the approved E&SC plan or complete, date and sign an inspection report that lists each E&SC measure shown on the approved E&SC plan. This documentation is required upon the initial installation of the E&SC measures or if the E&SC measures are modified after initial installation.
(b) A phase of grading has been completed.	Initial and date a copy of the approved E&SC plan or complete, date and sign an inspection report to indicate completion of the construction phase.
(c) Ground cover is located and installed in accordance with the approved E&SC plan.	Initial and date a copy of the approved E&SC plan or complete, date and sign an inspection report to indicate compliance with approved ground cover specifications.
(d) The maintenance and repair requirements for all E&SC measures have been performed.	Complete, date and sign an inspection report.
(e) Corrective actions have been taken to E&SC measures.	Initial and date a copy of the approved E&SC plan or complete, date and sign an inspection report to indicate the completion of the corrective action.

## 2. Additional Documentation to be Kept on Site

In addition to the E&SC plan documents above, the following items shall be kept on the site and available for inspectors at all times during normal business hours, unless the Division provides a site-specific exemption based on unique site conditions that make this requirement not practical:

- (a) This General Permit as well as the Certificate of Coverage, after it is received.
- (b) Records of inspections made during the previous twelve months. The permittee shall record the required observations on the Inspection Record Form provided by the Division or a similar inspection form that includes all the required elements. Use of electronically-available records in lieu of the required paper copies will be allowed if shown to provide equal access and utility as the hard-copy records.

## 3. Documentation to be Retained for Three Years

All data used to complete the e-NOI and all inspection records shall be maintained for a period of three years after project completion and made available upon request. [40 CFR 122.41]

## PART II, SECTION G, ITEM (4) DRAW DOWN OF SEDIMENT BASINS FOR MAINTENANCE OR CLOSE OUT

Sediment basins and traps that receive runoff from drainage areas of one acre or more shall use outlet structures that withdraw water from the surface when these devices need to be drawn down for maintenance or close out unless this is infeasible. The circumstances in which it is not feasible to withdraw water from the surface shall be rare (for example, times with extended cold weather). Non-surface withdrawals from sediment basins shall be allowed only when all of the following criteria have been met:

- (a) The E&SC plan authority has been provided with documentation of the non-surface withdrawal and the specific time periods or conditions in which it will occur. The non-surface withdrawal shall not commence until the E&SC plan authority has approved these items,
- (b) The non-surface withdrawal has been reported as an anticipated bypass in accordance with Part III, Section C, Item (2)(c) and (d) of this permit,
- (c) Dewatering discharges are treated with controls to minimize discharges of pollutants from stormwater that is removed from the sediment basin. Examples of appropriate controls include properly sited, designed and maintained dewatering tanks, weir tanks, and filtration systems,
- (d) Vegetated, upland areas of the sites or a properly designed stone pad is used to the extent feasible at the outlet of the dewatering treatment devices described in Item (c) above,
- (e) Velocity dissipation devices such as check dams, sediment traps, and riprap are provided at the discharge points of all dewatering devices, and
- (f) Sediment removed from the dewatering treatment devices described in Item (c) above is disposed of in a manner that does not cause deposition of sediment into waters of the United States.

## PART III SELF-INSPECTION, RECORDKEEPING AND REPORTING

## SECTION C: REPORTING

## 1. Occurrences that Must be Reported

Permittees shall report the following occurrences:

- (a) Visible sediment deposition in a stream or wetland.
- (b) Oil spills if:
  - They are 25 gallons or more,
  - They are less than 25 gallons but cannot be cleaned up within 24 hours,
  - They cause sheen on surface waters (regardless of volume), or
  - They are within 100 feet of surface waters (regardless of volume).
- (c) Releases of hazardous substances in excess of reportable quantities under Section 311 of the Clean Water Act (Ref: 40 CFR 110.3 and 40 CFR 117.3) or Section 102 of CERCLA (Ref: 40 CFR 302.4) or G.S. 143-215.85.
- (d) Anticipated bypasses and unanticipated bypasses.
- (e) Noncompliance with the conditions of this permit that may endanger health or the environment.

## 2. Reporting Timeframes and Other Requirements

After a permittee becomes aware of an occurrence that must be reported, he shall contact the appropriate Division regional office within the timeframes and in accordance with the other requirements listed below. Occurrences outside normal business hours may also be reported to the Department's Environmental Emergency Center personnel at (800) 858-0368.

Occurrence	Reporting Timeframes (After Discovery) and Other Requirements
(a) Visible sediment deposition in a stream or wetland	<ul> <li>Within 24 hours, an oral or electronic notification.</li> <li>Within 7 calendar days, a report that contains a description of the sediment and actions taken to address the cause of the deposition. Division staff may waive the requirement for a written report on a case-by-case basis.</li> <li>If the stream is named on the NC 303(d) list as impaired for sediment-related causes, the permittee may be required to perform additional monitoring, inspections or apply more stringent practices if staff determine that additional requirements are needed to assure compliance with the federal or state impaired-waters conditions.</li> </ul>
(b) Oil spills and release of hazardous substances per Item 1(b)-(c) above	<ul> <li>Within 24 hours, an oral or electronic notification. The notification shall include information about the date, time, nature, volume and location of the spill or release.</li> </ul>
(c) Anticipated bypasses [40 CFR 122.41(m)(3)]	<ul> <li>A report at least ten days before the date of the bypass, if possible.</li> <li>The report shall include an evaluation of the anticipated quality and effect of the bypass.</li> </ul>
(d) Unanticipated bypasses [40 CFR 122.41(m)(3)]	<ul> <li>Within 24 hours, an oral or electronic notification.</li> <li>Within 7 calendar days, a report that includes an evaluation of the quality and effect of the bypass.</li> </ul>
(e) Noncompliance with the conditions of this permit that may endanger health or the environment[40 CFR 122.41(I)(7)]	<ul> <li>Within 24 hours, an oral or electronic notification.</li> <li>Within 7 calendar days, a report that contains a description of the noncompliance, and its causes; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time noncompliance is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance. [40 CFR 122.41(I)(6).</li> <li>Division staff may waive the requirement for a written report on a case-by-case basis.</li> </ul>




NCG01 SELF-INSPECTION, RECORDKEEPING AND REPORTING

EFFECTIVE: 04/01/19

FUSCO LAND PLANNING & DESIGN, PLLC

Westmore Design, PA



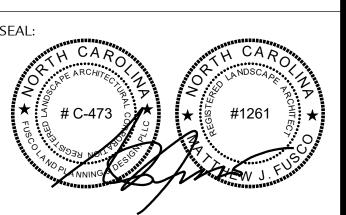

DRAWN BY:

CHECKED BY: MJF

REST, NC 28803 - BUNCOMBE COUNTY

ND PLANNING & DESIGN, PLLO

FUSCO LAND PLANNING

WEILBAECHER
14 VANDERBILT ROAD, BILTMORE FC

ISSUE DATE: 09/09/2021

No. Revision / Issue Date


Copyright © 2018, Fusco Land Planning & Design, PLLC


HEET TITLE:


Self-Inspection, Recordkeeping, & Reporting

SHEET NO:


L1.03

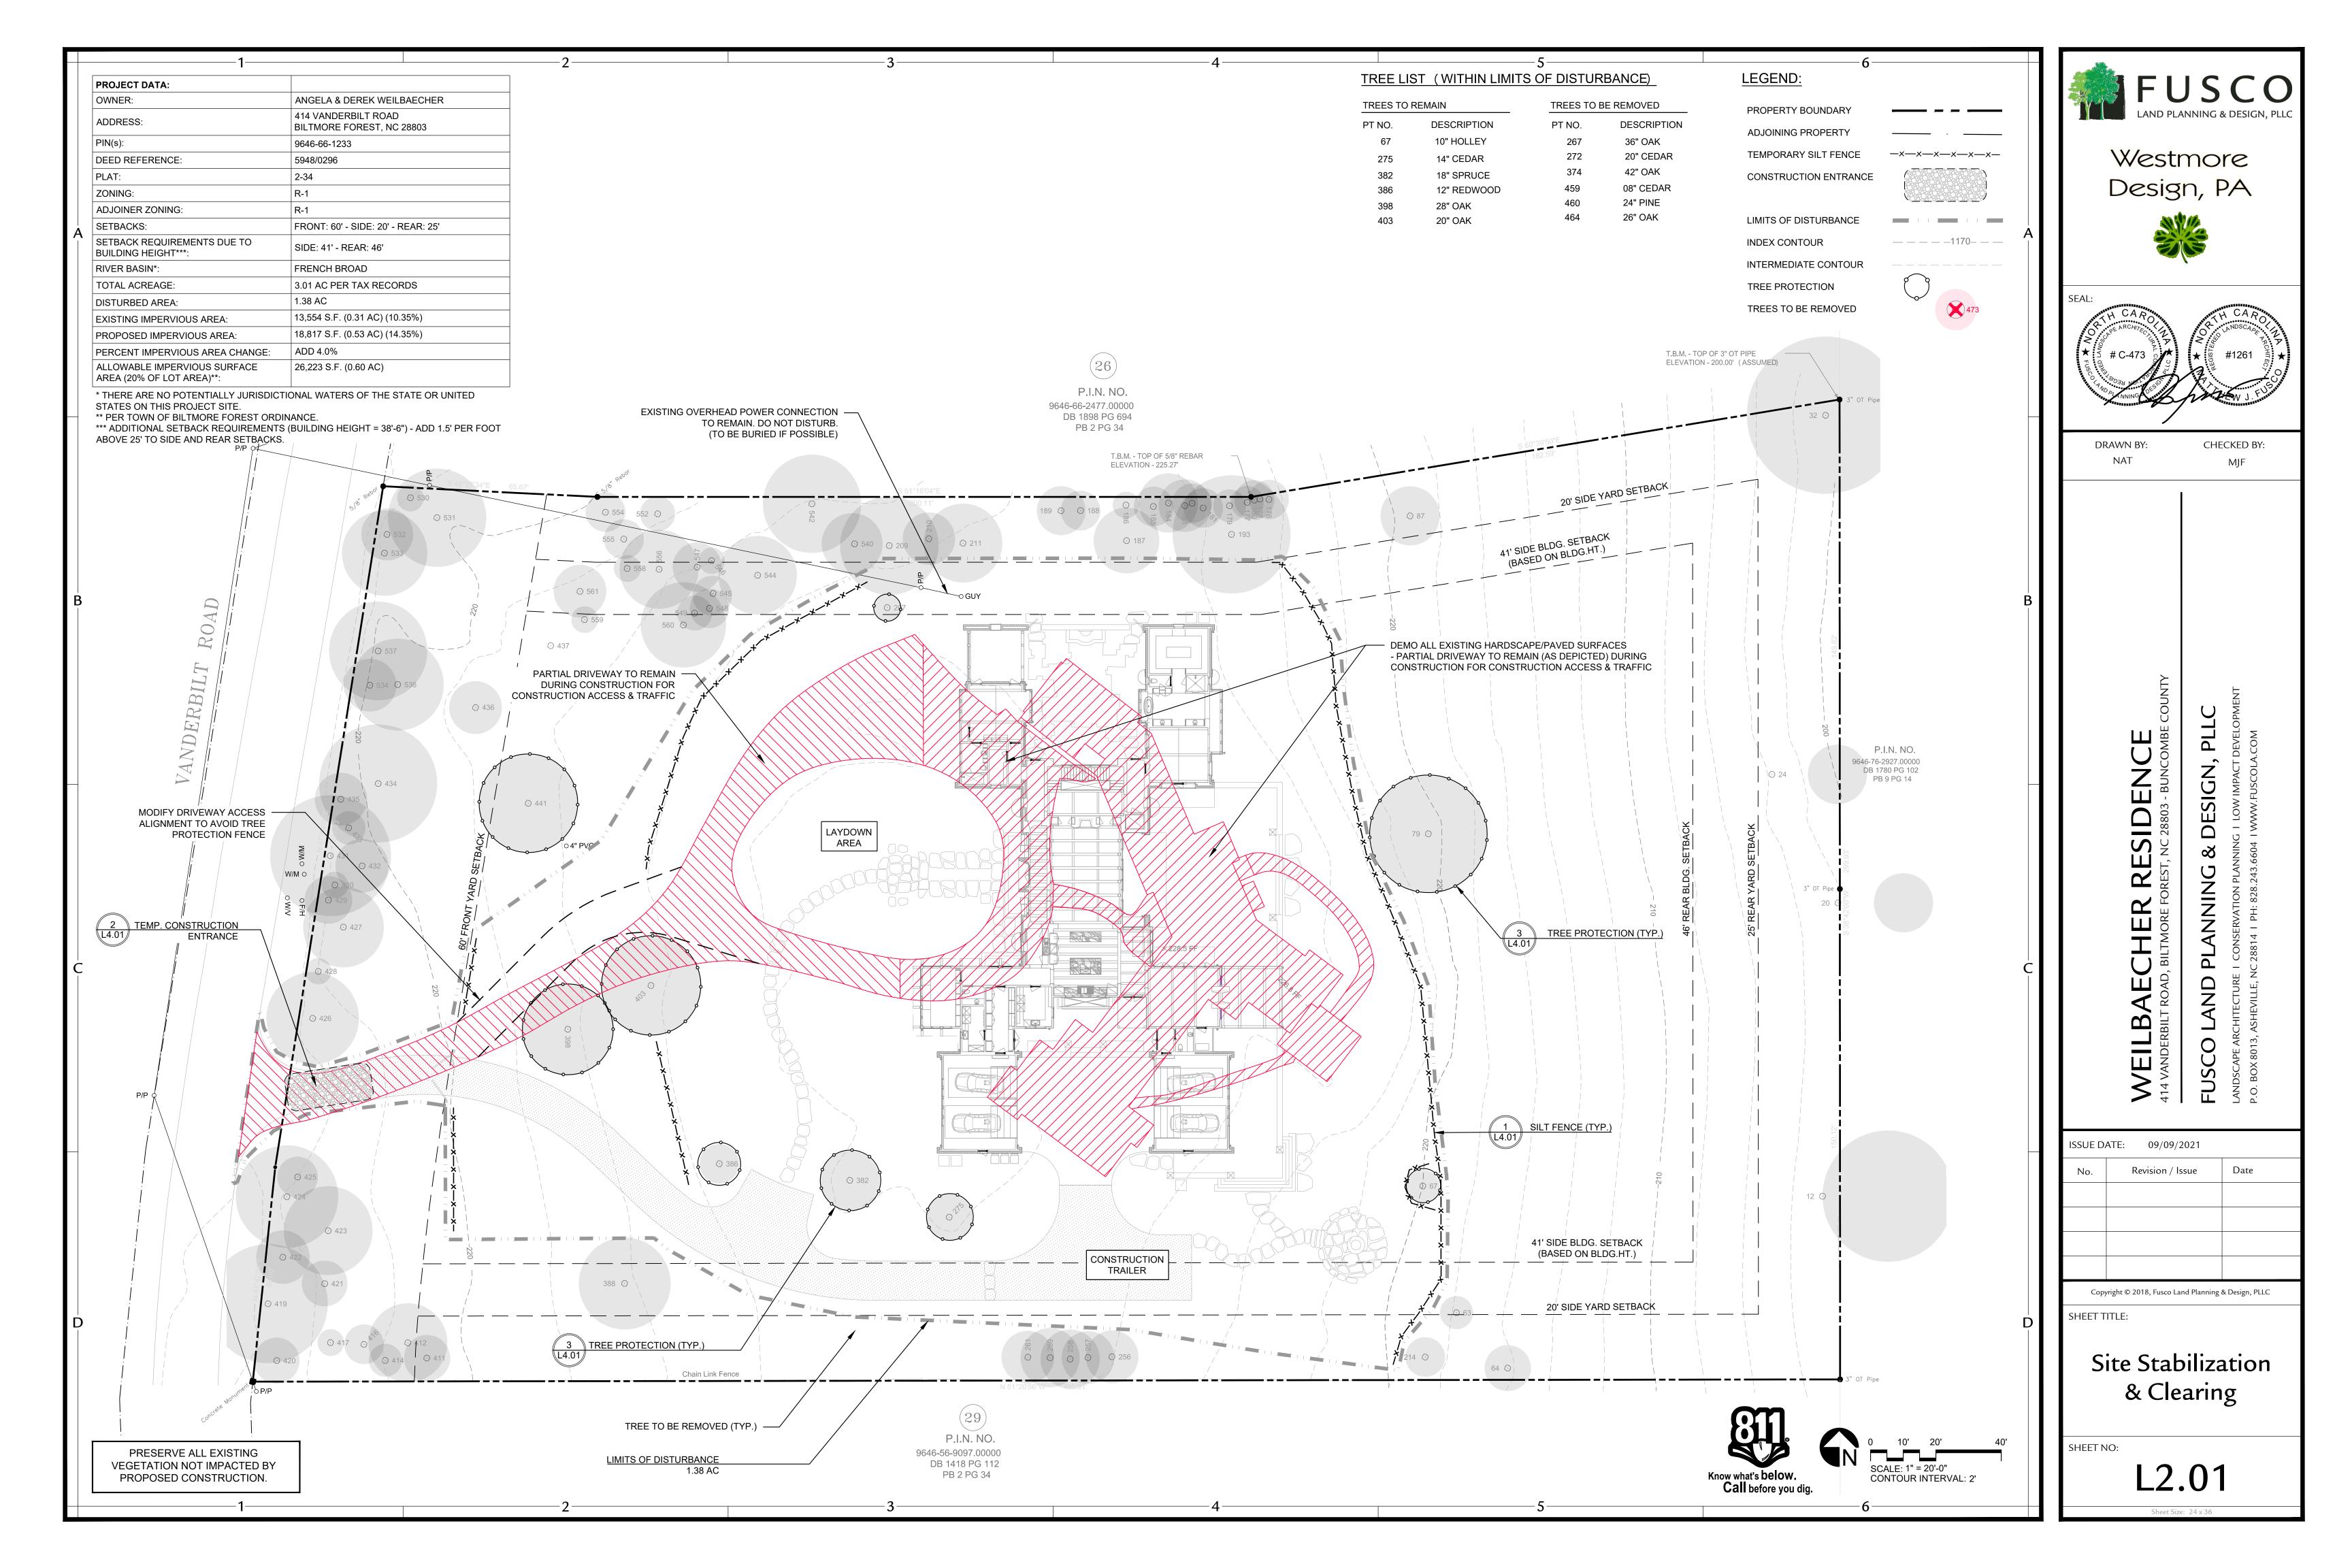

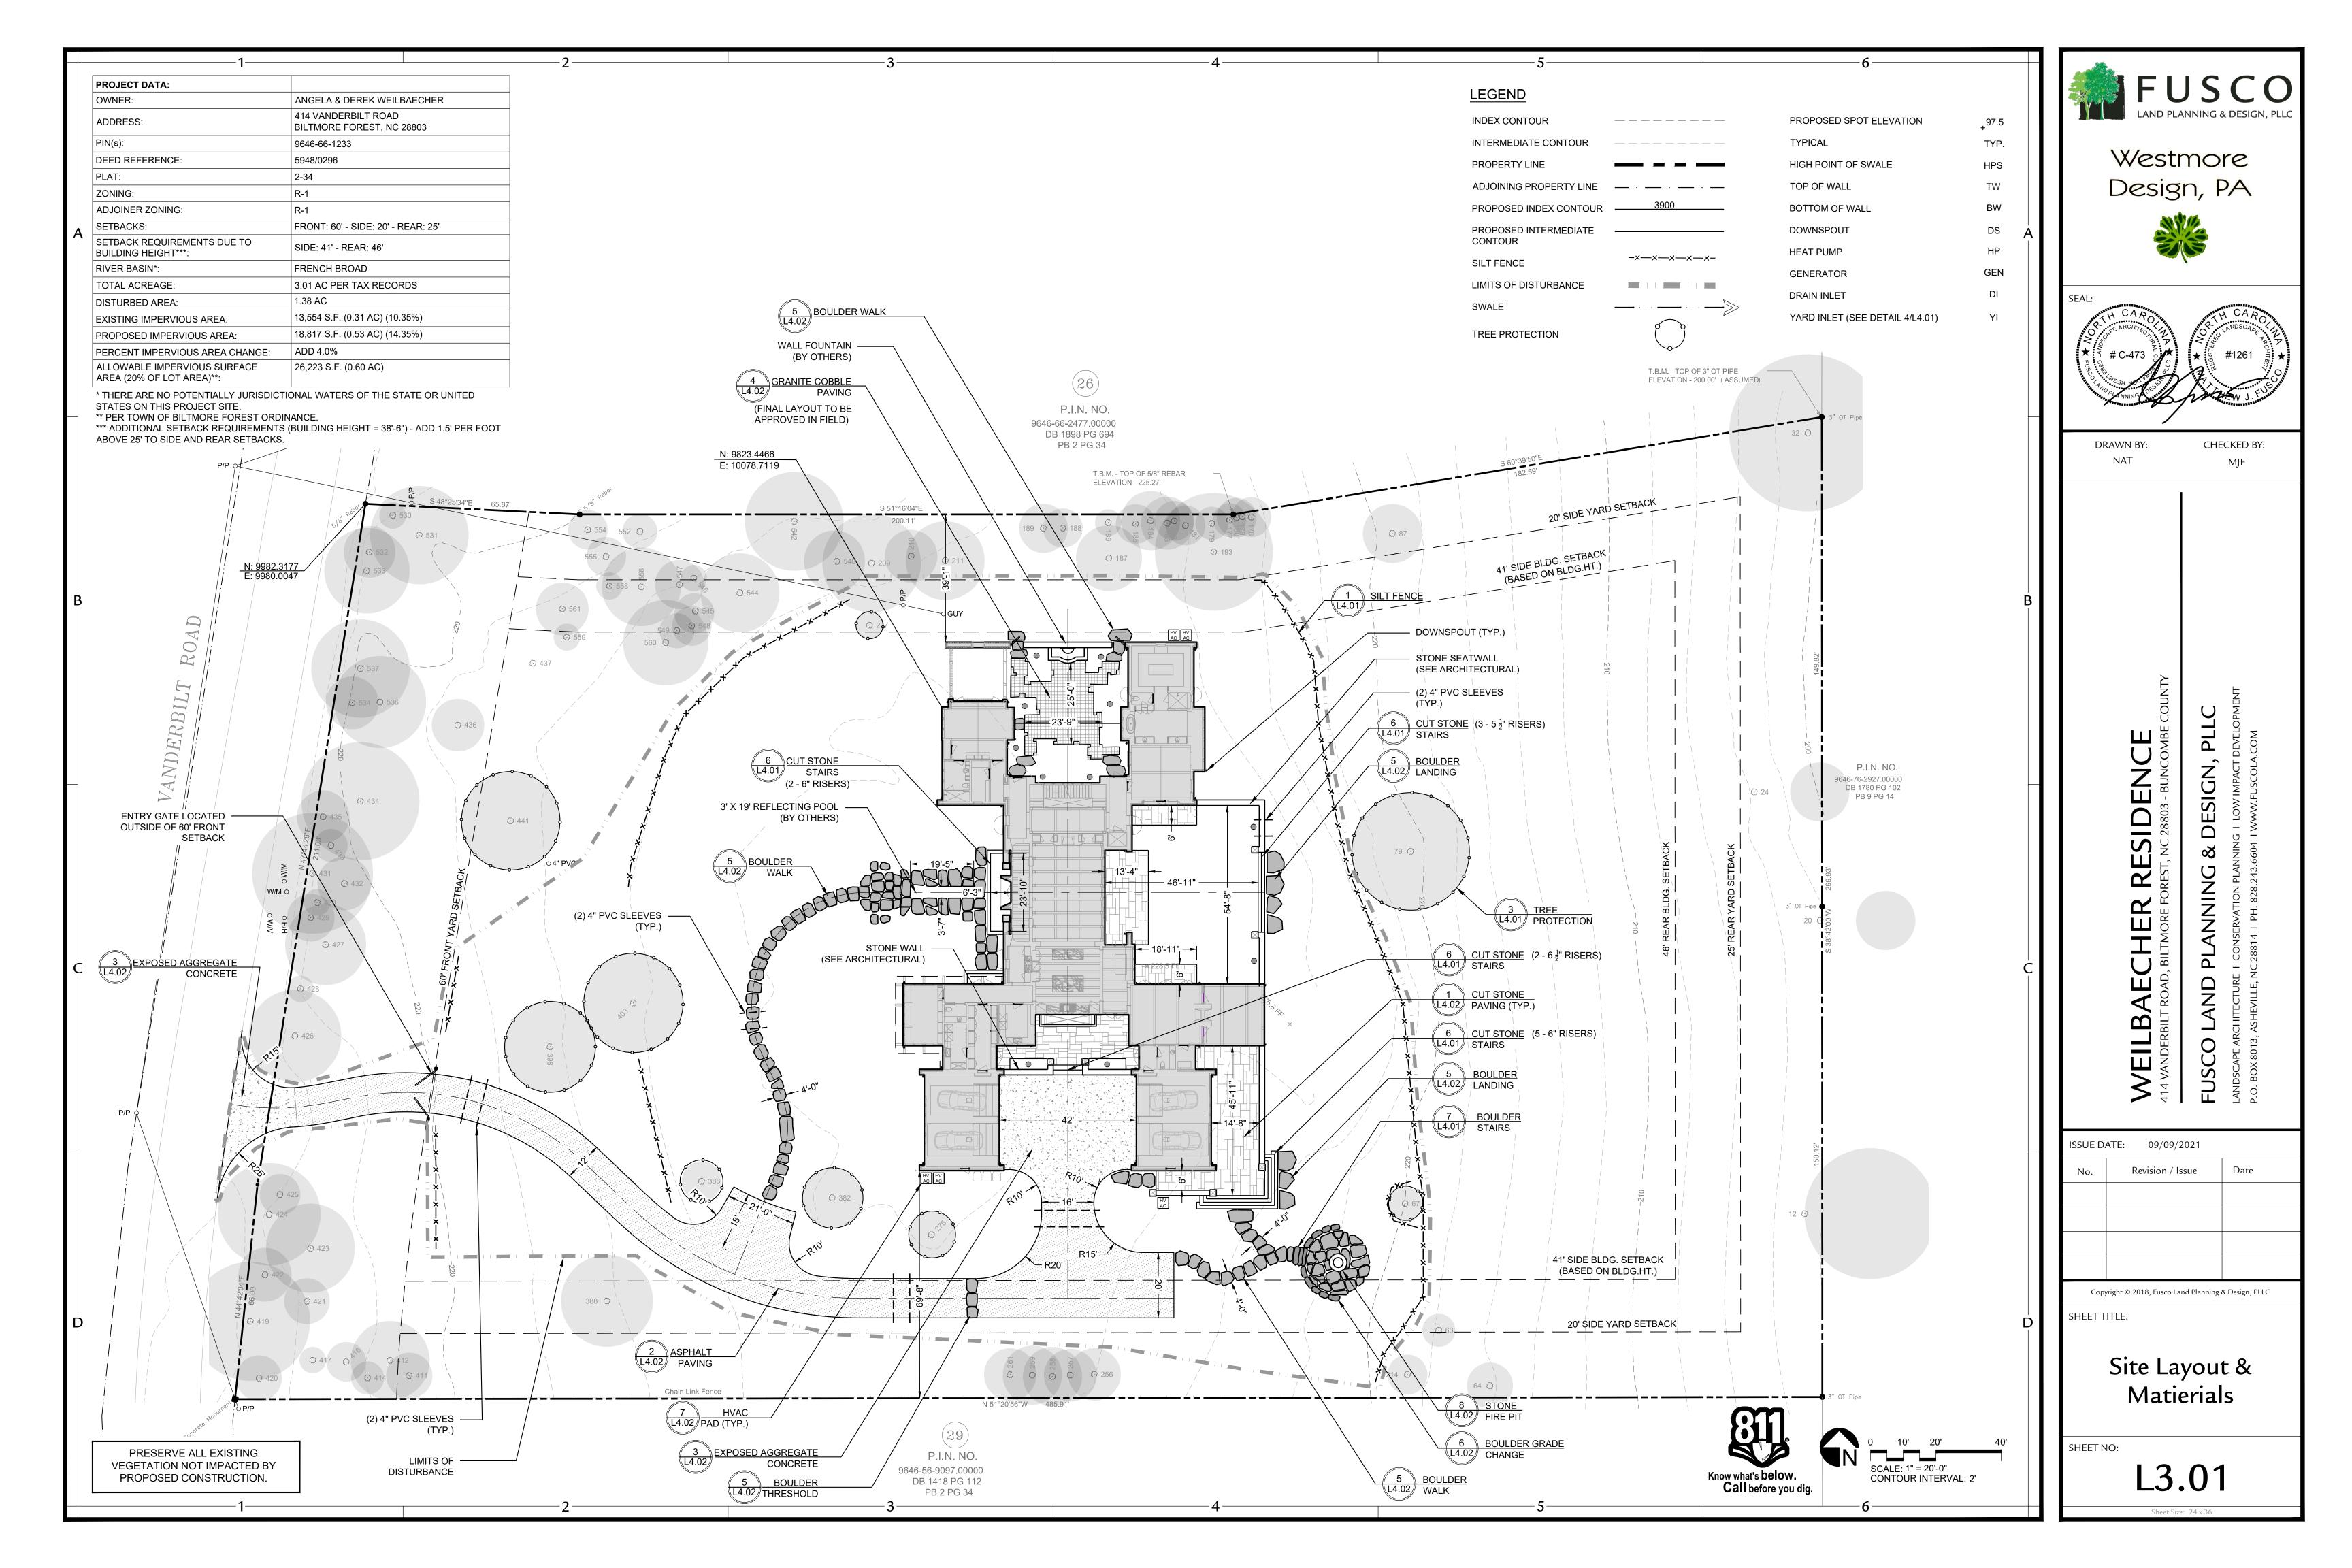

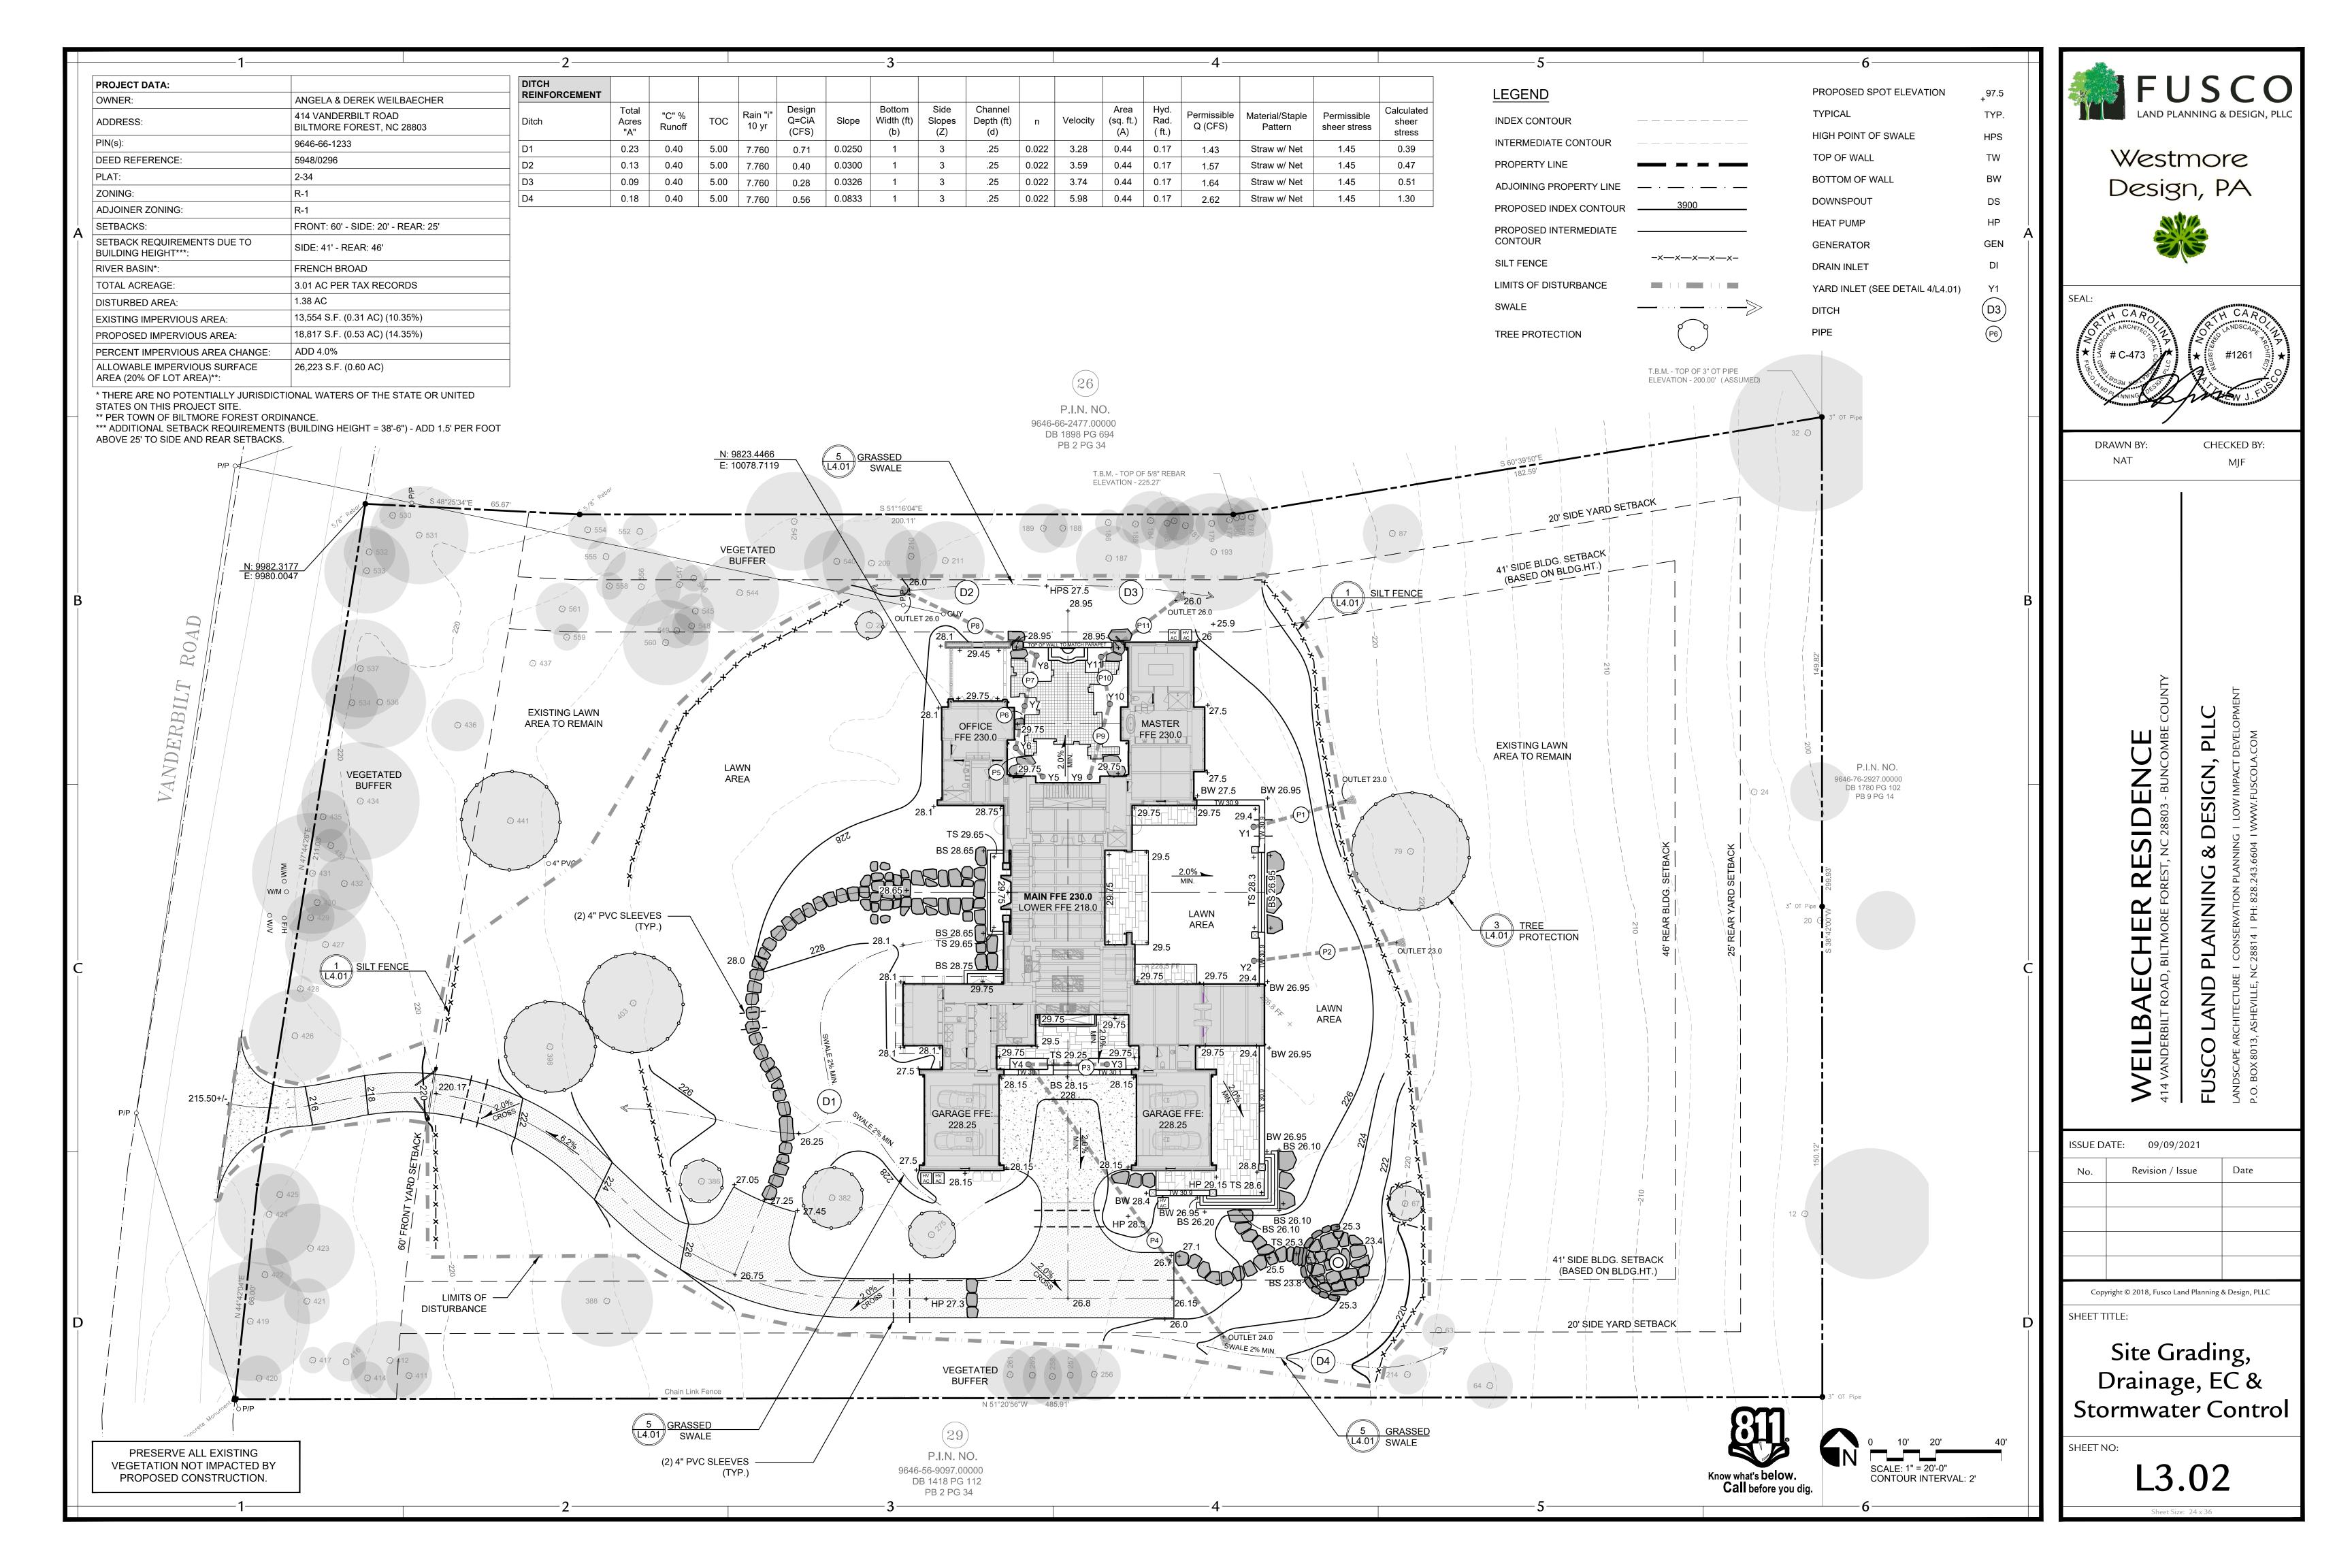

YARD INLET SCHEDULE RUNOFF & PIPE CAPACITY Runoff: Q=CIA Pipe Capacity: Q=1.486/n\*R^2/3\*S^0.5\*A Approx. Developed Total 25Year RIM Pipe Manning's Pipe Runoff Tc Rainfall Runoff Pipe Full Flow Sized Elevation Invert In Invert Out to Pipe Pipe Length "n" Slope Intensity Capacity Velocity Size Invert In Invert Out C-Factor for the (ACRES) (FT) (FT) (CFS) (CFS) (Min) (In/Hr) Mat'l Factor design storm 24.00 Y1 29.30 12 31.35 HDPE 0.013 3.19% 24.00 23.00 0.10 7.760 0.31 6.4 0.40 5 OK 24.00 Y2 29.30 46.15 HDPE 2.17% 7.760 12 0.013 24.00 23.00 0.10 0.40 0.31 5.2 6.7 OK Y3 28.75 26.20 22.50 HDPE 5 7.760 12 0.013 2.00% 26.20 25.75 0.03 0.40 0.08 5.0 6.4 OK Y4 28.75 25.75 25.50 100.00 HDPE 25.50 24.00 7.760 0.08 5.6 OK 12 0.013 1.50% 0.03 0.40 4.4 Y5 29.25 27.25 12 10.50 HDPE 0.013 1.43% 27.25 27.10 0.09 0.40 5 7.760 0.27 4.3 5.4 OK 29.25 27.00 27.00 Y6 11.50 HDPE 27.00 7.760 0.27 5.2 OK 0.013 1.30% 26.85 0.09 0.40 4.1 26.85 Y7 29.25 26.85 HDPE 14.15 1.77% 7.760 0.013 26.75 26.50 0.09 0.40 0.27 4.7 6.0 OK Y8 28.50 26.50 26.50 7.760 0.27 5.3 OK 44.50 0.013 1.35% 26.40 25.80 0.09 0.40 4.1 27.25 27.25 Y9 29.25 HDPE 0.09 0.40 7.760 0.27 0.013 1.92% 27.25 26.75 4.9 6.3 OK Y10 26.75 26.75 29.00 P10 13.15 HDPE 7.760 0.27 6.3 OK 12 0.013 1.90% 26.75 26.50 0.09 0.40 4.9 Y11 28.50 26.50 26.50 12 21.50 HDPE 7.760 0.27 0.013 2.33% 26.50 26.00 0.09 0.40 5 5.4 6.9 OK \* If pipe size shown is not available increase to next available pipe size. Ensure 2' cover over all pipes. \*\* TOC was determined using chart 8.03.04 of the erosion control manual. All TOC's less than 5, were rounded up to 5. \*\*\* Pipes 5-11 sized for entire courtyard area to provide for redundancy against flooding.

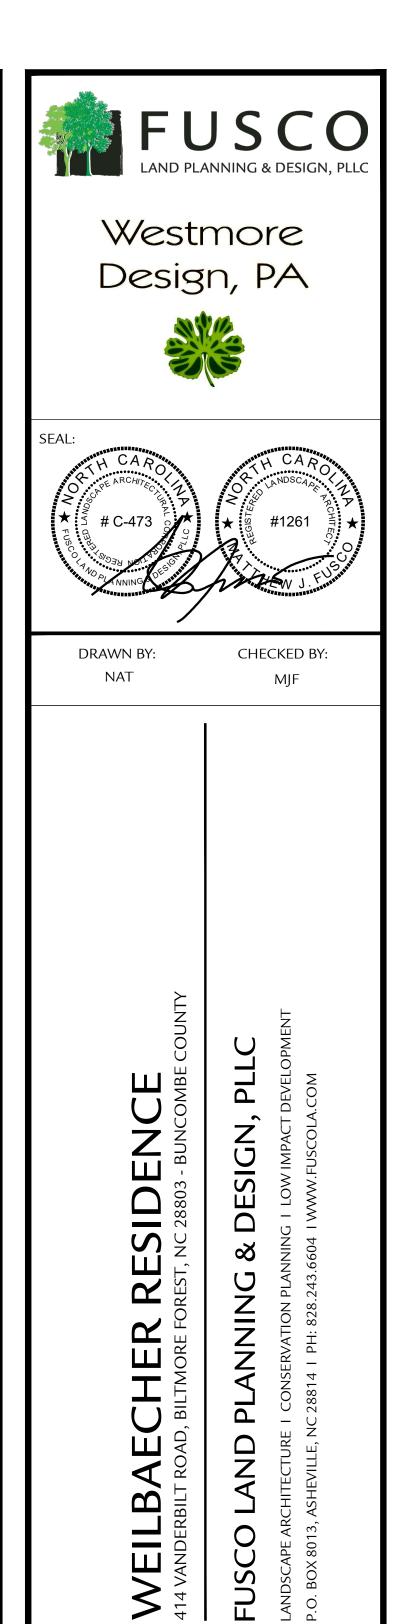

ISSUE DATE: 09/09/2021

No. Revision / Issue Date

Copyright © 2018, Fusco Land Planning & Design, PLLC


SHEET TITLE:


Yard Inlet & Pipe Schedule


SHEET NO:

L3.03

Sheet Size: 24 x 36

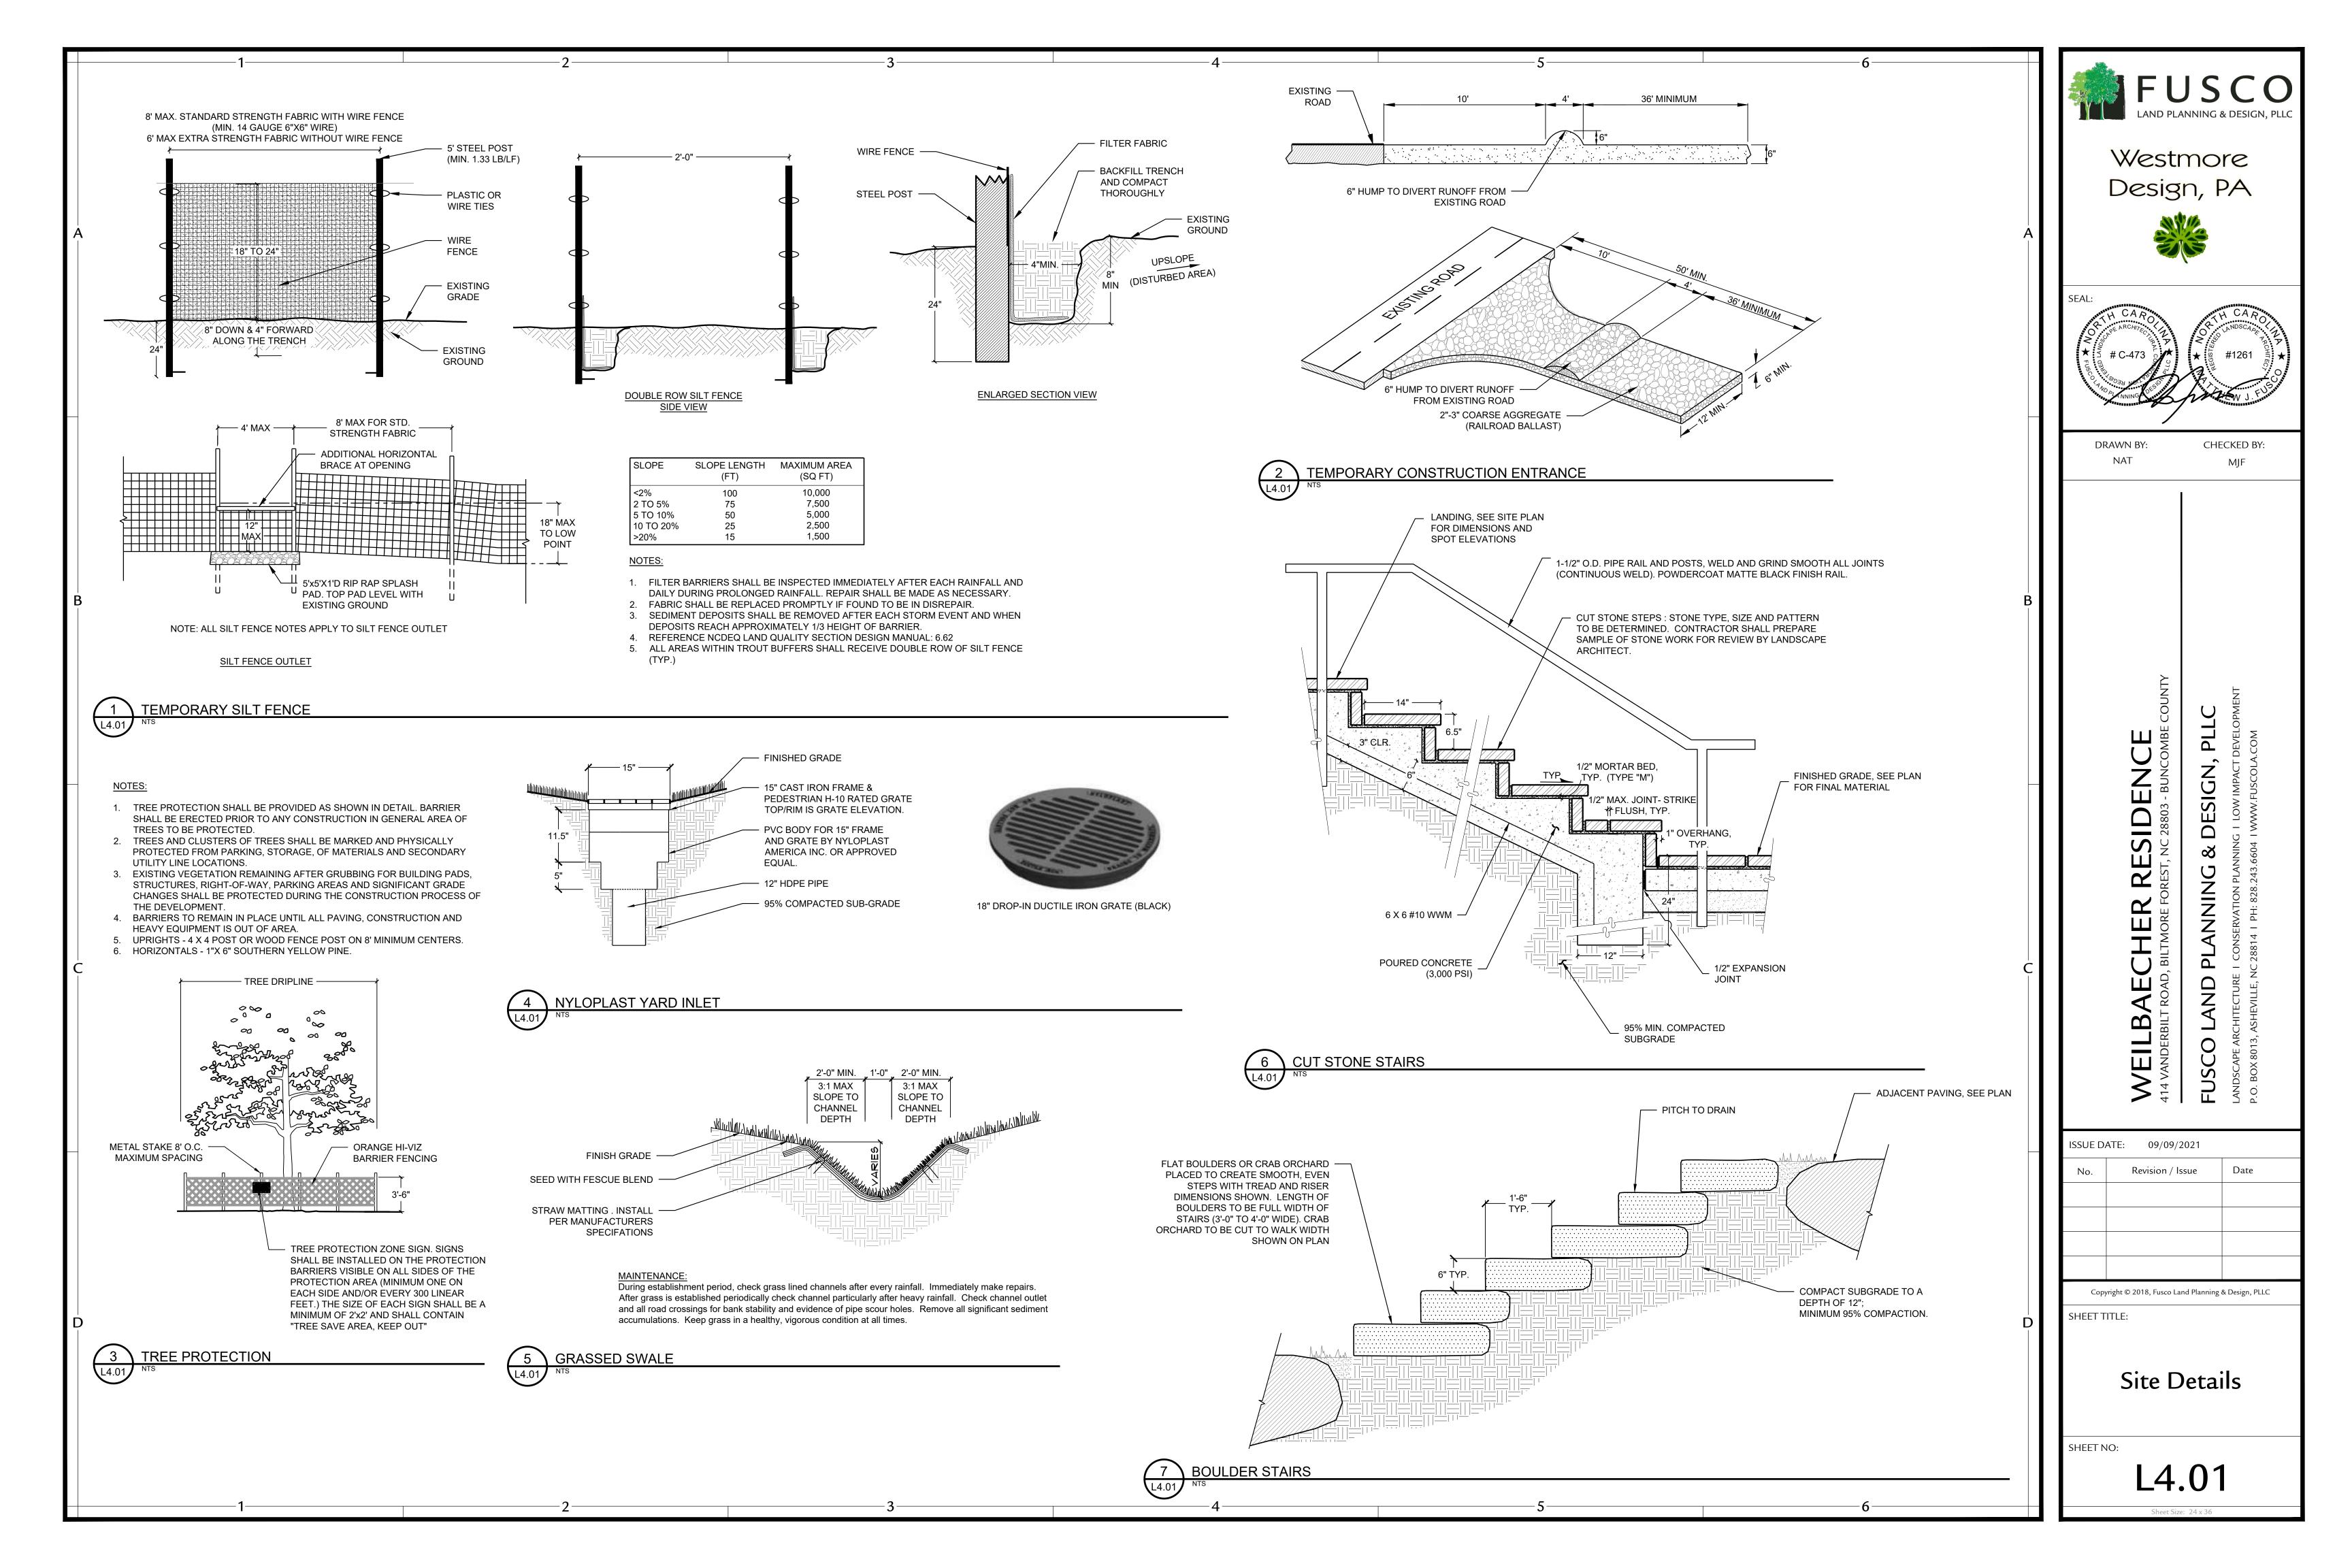

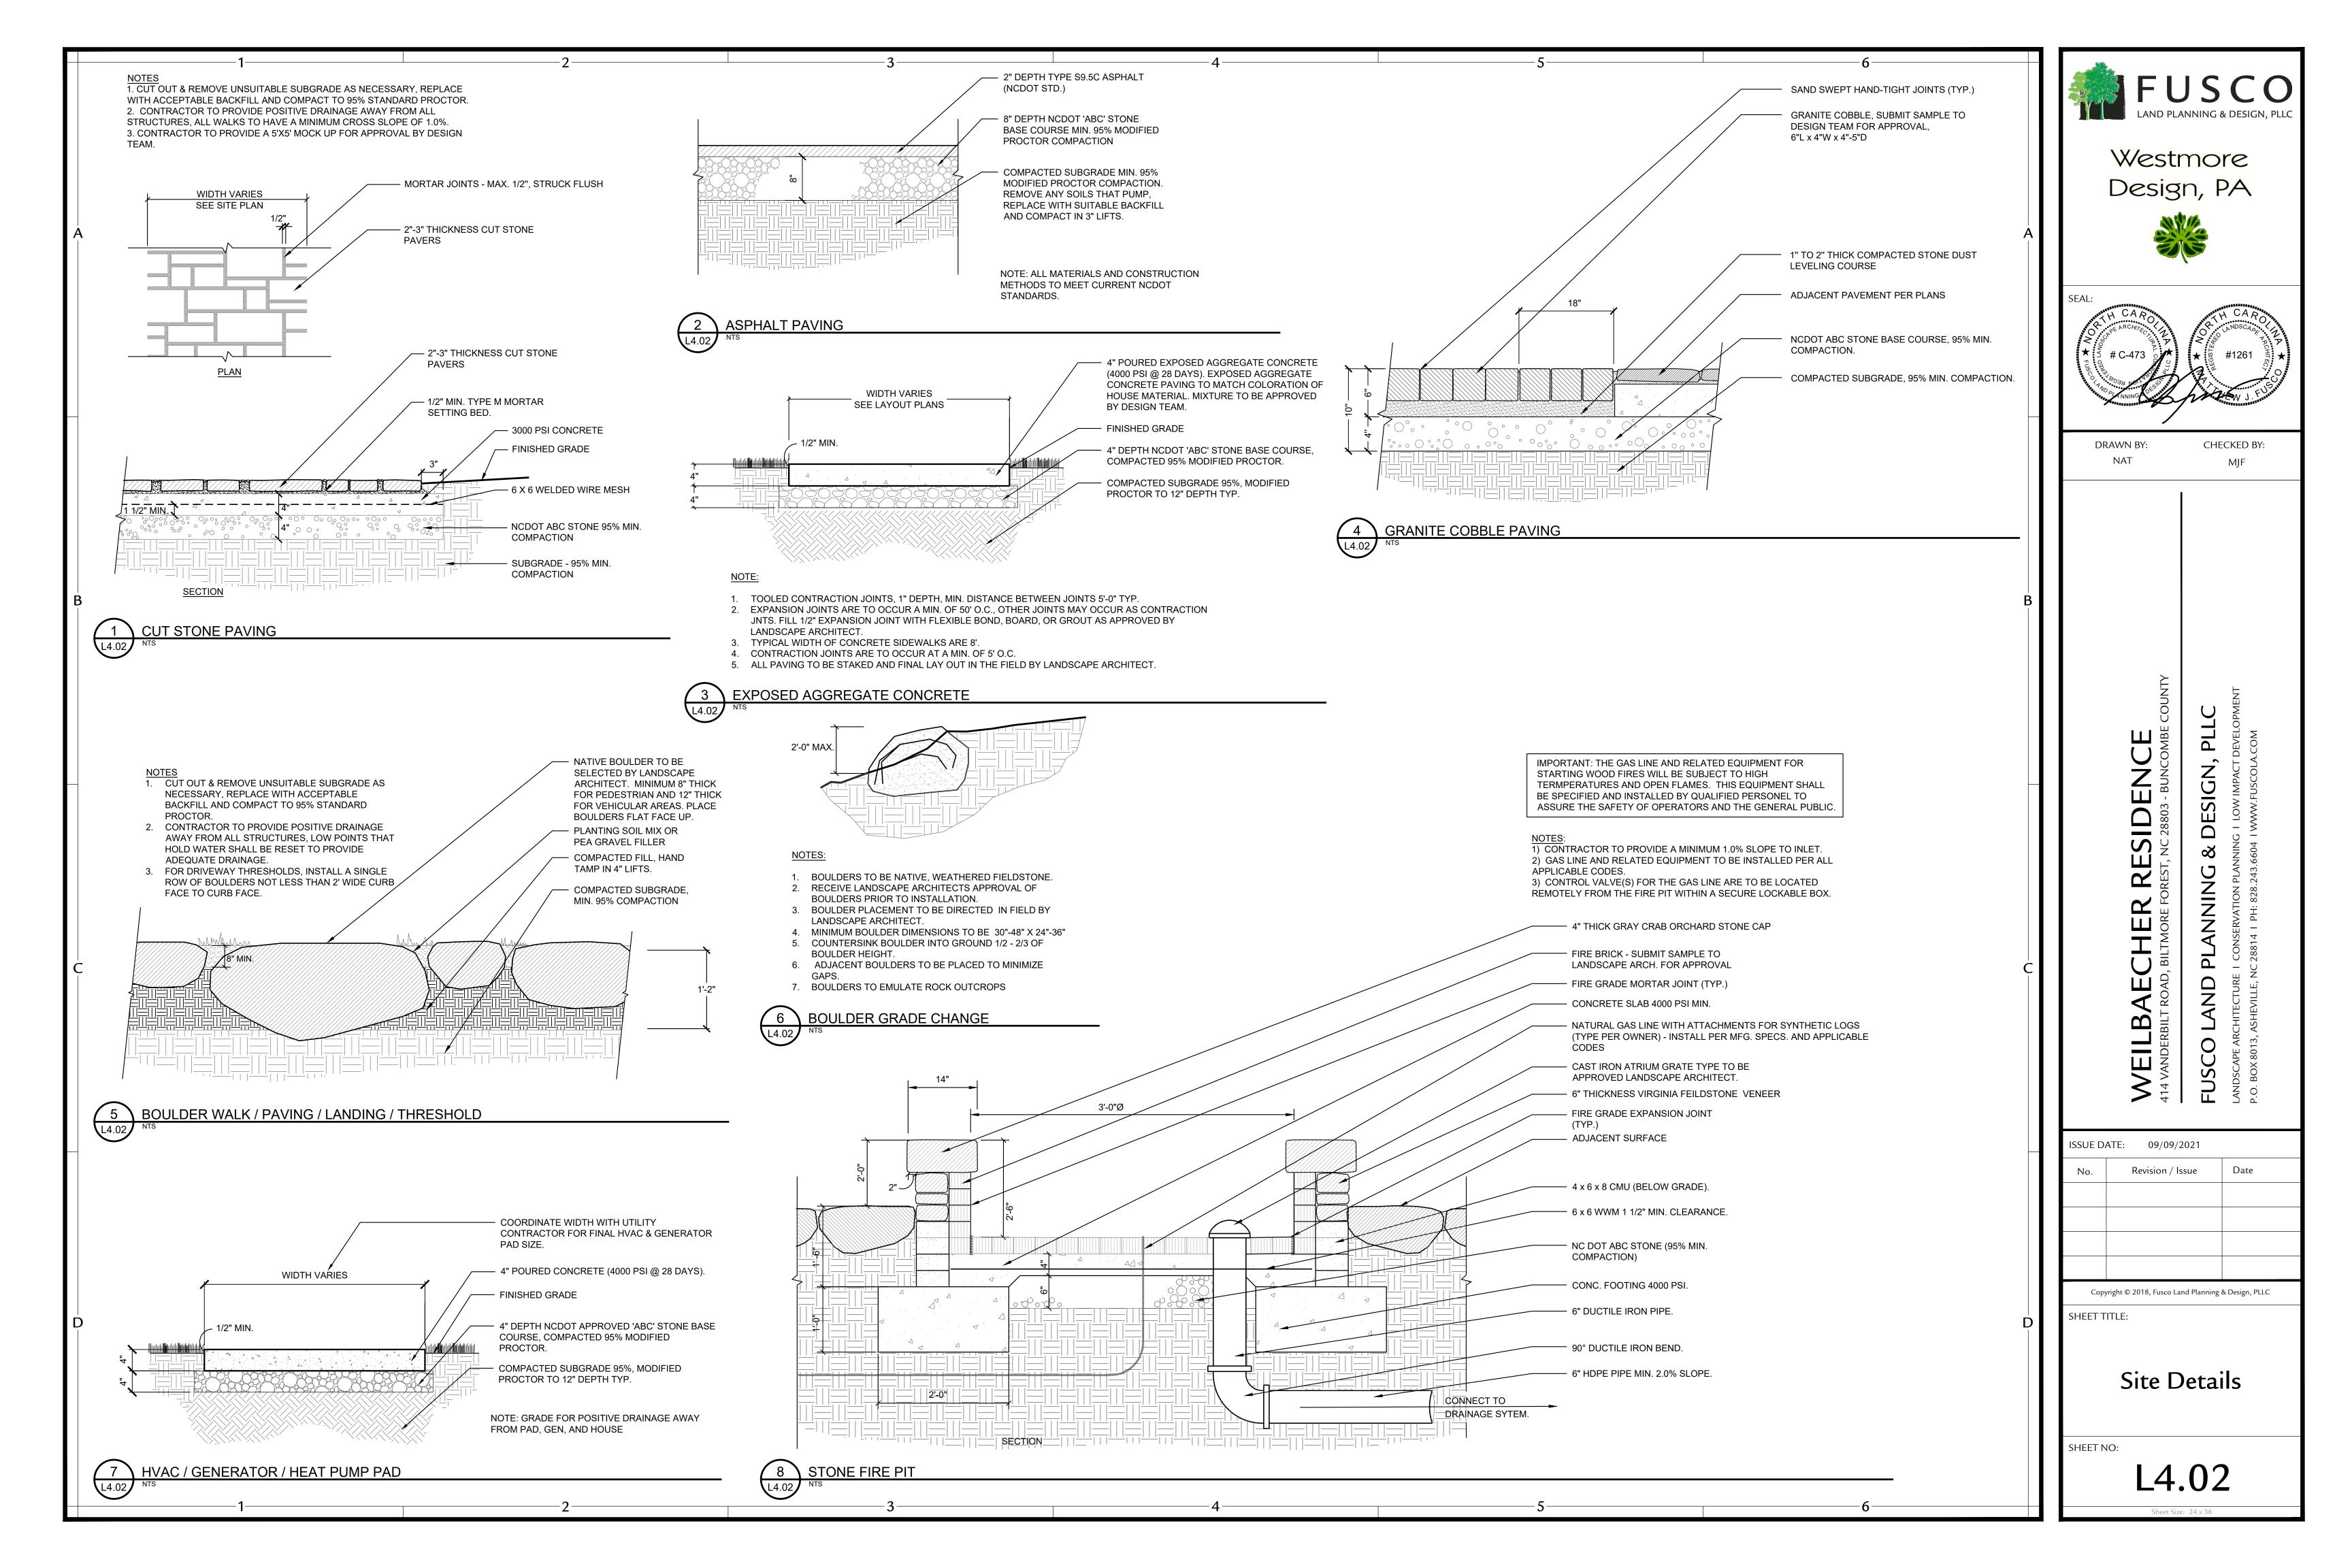

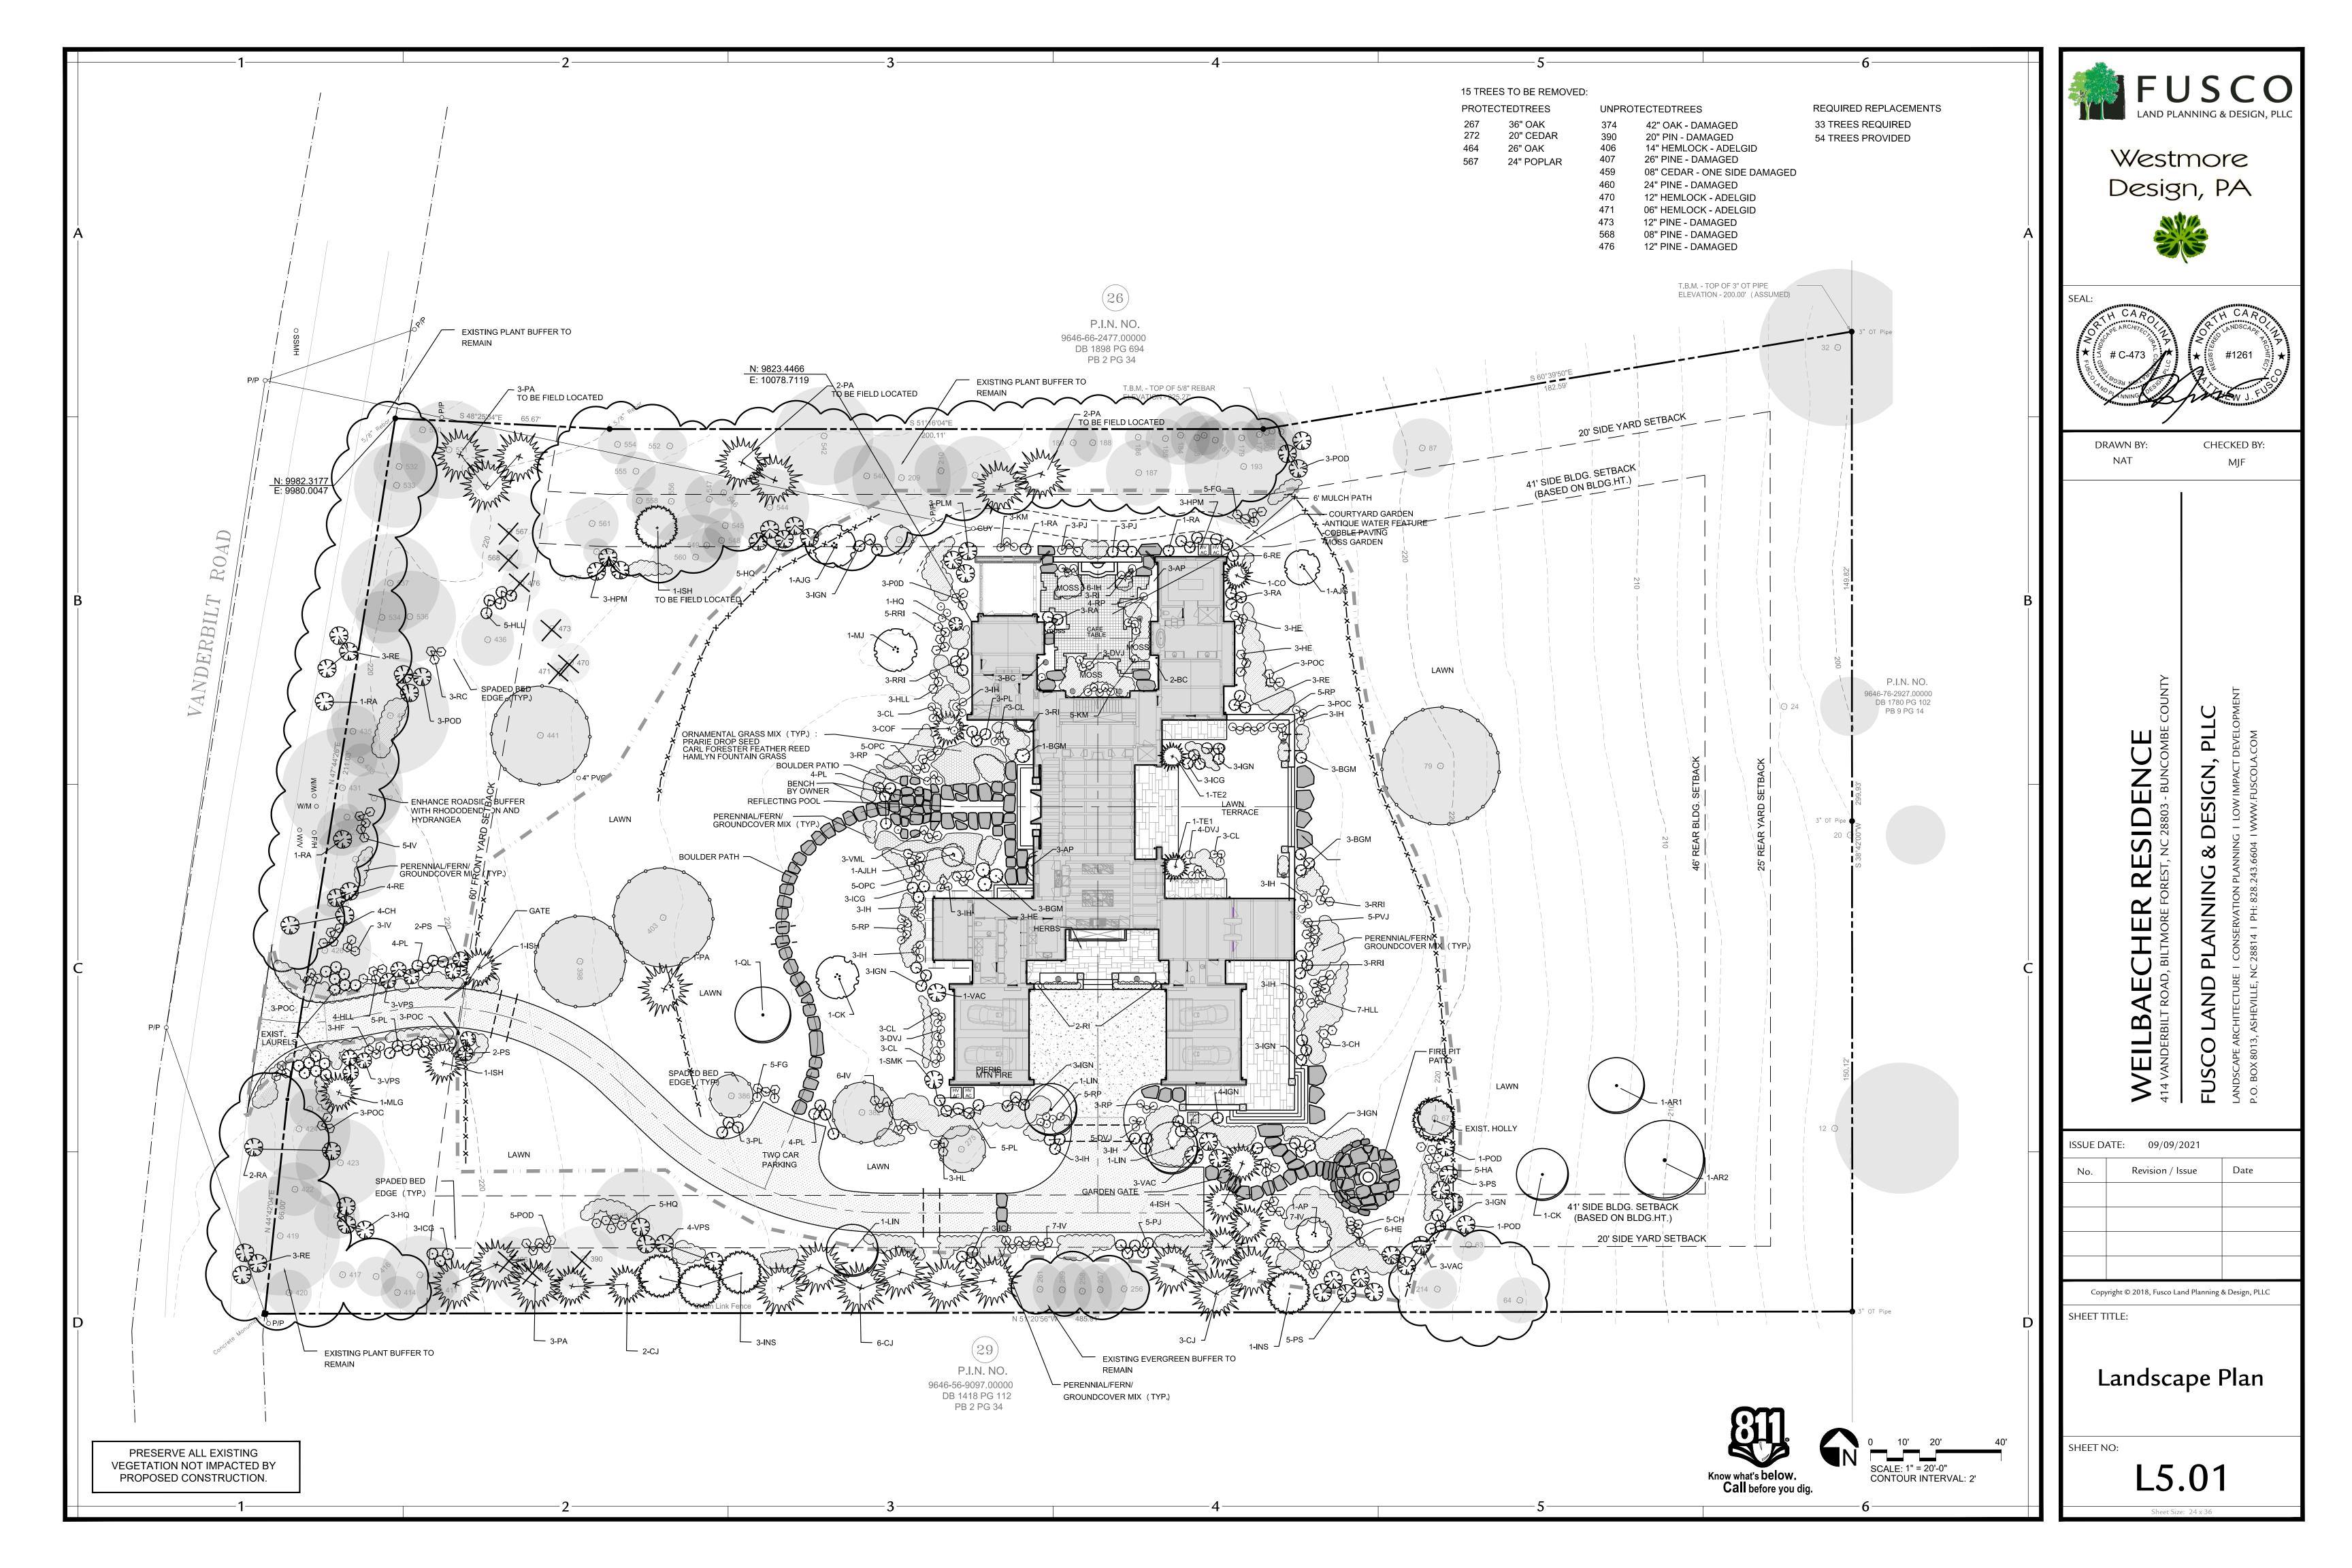

#### PLANT LIST SYM. BOTANICAL NAME COMMON NAME QTY. **SPECIFICATIONS CANOPY TREES** 3.5" Cal. - B&B - Single, straight leader - Dense, full plant Red Sunset Maple Acer rubrum 'Red Sunset' Acer rubrum 'Red Sunset' 2.5" Cal. - B&B - Single, straight leader - Dense, full plant Red Sunset Maple 3.5" Cal. — B&B — Single, straight leader — Dense,full plant Overcup Oak Quercus lyrata **EVERGREEN TREES** CO Hinoki Cypress Chamaecyparis obtusa 10' - 12' ht. - B&B - Dense, full plant Japanese Cryptomeria Cryptomeria japonica 8' - 10' ht. - B&B - Dense, full plant llex x 'Nellie Stevens Holly Nellie Stevens Holly 6' - 8' ht. - B&B - Dense, full plant llex x 'Satyr 'Hill Holly' 'Satyr Hill' Holly ISH 8' - 10' ht. - B&B - Dense, full plant Picea 'abies Norway Spruce Magnolia x 'Little Gem' Little Gem Magnolia 5'-6" ht. - B&B - Dense, full plant **Emerald Arborvitae** 8' '- 10' ht. - B&B - Dense, full plant TE1 Thuja x Emerald TE2 Thuja x 'Emearald' **Emerald Arborvitae** 10'-12' ht. - B&B - Dense, full plant SMALL FLOWERING TREES 4' - 5' Hgt. multi stemmed (3 min.) - Specimen Red Buckeye Aesculus pavia 8' -10' Hgt. multi stemmed (3 min.) - Specimen Acer japonica 'Green Leaf' Green Leaf japanese maple 4' - 5' Hgt. multi stemmed (3 min.) - Specimen Acer japonica 'Lions Head' Lions Head japanese maple 7' - 8' ht. - B&B - Multi-stemmed - 3 Leaders min. - Full plant Kousa Dogwood Cornus kousa 6'- 8' Ht - Multi-stemmed - Dense, Full plant Magnolia x 'Jane' Jane Saucer magnolia 10' -12' Ht - B&B -Multi stemmed (3 min.) - Specimen Natchez Crepe Myrtle Lagerstroemia Indica 'Natchez" **EVERGREEN SHRUBS** Green Mountain Boxwood 7 Gal. Cont. - Dense, full plant Buxus 'Green Mountain' 3 Gal. Cont. - Dense, full plant DVJ Distylium 'Vintage Jade' Vintage jade Distylium Dwf. Inkberry Holly 3 Gal. Cont. - Dense, full plant IGN llex glabra 'Nigra' ICG llex x 'China Girl' China Girl Holly (one China Boy) 3 Gal. Cont. - Dense, full plant 3 Gal. Cont.. - Cont. - Dense, full plant llex x 'Hoogendorn' Hoogendorn Holly Kalmia latifolia 'Minuet' Minuet Mountain Laurel 3 Gal. Cont. - Cont. - Dense, full plant 5 Gal. Cont. - Cont. - Dense, full plant Prunus laurocerasus 'Otto Luyken' Otto Luyken Cherry Laurel 5 Gal. Cont. - Cont. - Dense, full plant Prunus laurocerasus 'Schipkaensis' Schip Cherry Laurel 5 gal. Cont. Dense, full plant. Pieris japonica Japanese pieris 24" - 30" ht.- Dense, full plant Rhododendron catawbiense 'English Roseum' English Roseum Rhododendron 24" - 30" ht.- Dense, full plant Rhododendron catawbiense 'Anna Krushke' Anna Krushke Rhododendron 3 Gal cont..- Dense, full plant Rosa x 'Pink Drift' Pink Drift Rose 3 Gal cont..— Dense, full plant Rosa x 'Ringo' Ringo Rose **DECIDUOUS SHRUBS AND VINES** Caryopteris clandonensis 'Dark Knight False Spirea 3 gal. Cont. - Dense, full plant Clethra alnifolia 'Humminabird' Hummingbird Clethra 3 Gal. Cont. - Dense, full plant Dwarf Fothergilla 3 Gal Cont. — Dense , full plant Fothergilla Gardenii 3 Gal. Cont. - Dense, full plant Firelight Hydrangea Hydrangea paniculata 'Firelight' Hydrangea paniculata 'Little Lime' 3 Gal. Cont. — Dense, full plant Little Lime Hydrangea Hydrangea x 'Penny Mac' 5 gal. Cont. - Dense, full plant Penny Mac Hydrangea Hydrangea 'endless Summer' Endless Summer Hydrangea 3 gal Cont. — dense, full plant. Hydrangea quercifolia 'Ruby Slippers' 3 Gal. Cont. - Dense, full plant Oak Leaf Hydrangea 3 Gal. Cont. - Dense, full plant Itea virginica 'Henry's Garnet' Virginia Sweetspire Chaste Tree 5 gal. Cont. - Dense, full plant Vitex agnus-castus Viburnum plicatum 'Shasta' Shasta Viburnum 5 gal. Cont. - Dense, full plant 3 Gal. Cont. - Dense, full plant HLK Hibiscus x 'Little Kim' Dwf. Rose of Sharon Coppertina Ninebark 3 Gal. Cont. — Dense, full plant POC Physocarpus opulus 'Coppertina POD Physocarpus opulus 'Diablo' Diablo Ninebark 5 Gal. Cont. - Dense, full plant 5 Gal. Cont. — Dense, full plant Physocarpus opulus 'Diablo' Diablo Ninebark POD 1 Gal Cont. - Dense , full plant Climbing Hydrangea Anomala petriola Iceburg Climbing Rose 1 Gal Cont. - Dense , full plant Rosa x 'Iceburg' PERENNIALS AND FERNS Allium 'Mellenium' Wild Onion 1 Gallon cont. - Dense, full plant Aster x 'Winston Churchill' Winston Churchill Aster 1 Gallon cont. — Dense, full plant 1 Gallon cont. — Dense, full plant New England Aster Aster novae-angliae 1 Gallon cont. - Dense, full plant Chrysanthemum x superbum Shasta Daisy Coreopsis verticillata 'Zaareb' Threadleaf Coreopsis 1 Gallon cont. - Dense, full plant 1 Gallon cont. - Dense, full plant DG Cheddar Pinks 'Bath's Pink' Dianthus gratianopolitanus 1 Gallon cont. — Dense, full plant Dennstadtia punctiloba Hay-Scented Fern 1 gallon cont. — Dense full plant 1 Gallon cont. — Dense, full plant 1 Gallon cont. — Dense, full plant Autumn Fern Dryopteris erythrosora Purple Coneflower Echinacea purpurea Daylily Candytuft Hermerocallis liliaceae Iberis sempervirens 'Purity' 1 Gallon cont. — Dense, full plant Iris siberica 'Ceasars Brother' 1 Gallon cont. - Dense, full plant Siberian Iris 1 Gallon cont. - Dense, full plant Siberian Iris Iris siberica 'Ice Castles' 1 Gallon cont. - Dense, full plant Spike Gayfeather Liatris spicata 'Kobold' Polystichum acrostichoides 1 Gallon cont. - Dense, full plant Christmas Fern Karl Forester Reed Grass Calamagrostis x actiflora 'Stricta' 1 Gallon cont. - Dense, full plant CK PSB Phlox subulata Moss Phlox 'Blue' 1 Gallon cont. - Dense, full plant 1 Gallon cont. - Dense, full plant Rudeckia fulsida 'Goldstrum' Blackeyed Susan Solidago x 'Fireworks' 1 Gallon cont. - Dense, full plant Fireworks Golden Rod 1 Gallon cont. - Dense, full plant Creeping Thyme 1 Gallon cont. - Dense, full plant VS Veronica x 'Blue Skywalker' Speedwell GROUNDCOVER 1 Qt cont. — Dense, full plant jap. Pacchysandra Perriwinkle Pacchysandra Terminallis 25 1 Qt cont. — Dense, full plant Vinca Minor

#### LANDSCAPE NOTES

- ALL AREAS SHOWN ON THE PLAN TO BE MULCHED SHALL RECEIVE 3" DEPTH OF AGED FINE SHREDDED PINE BARK. SAMPLE TO BE APPROVED BY LANDSCAPE ARCHITECT.
- 2. CONTRACTOR SHALL VERIFY QUANTITIES ON THE PLAN AND IS RESPONSIBLE FOR ALL PLANTS AS SHOWN ON THE PLANT LIST. REPORT ANY DISCREPANCIES TO LANDSCAPE ARCHITECT. SEE PLANT LIST SHEET L-4.
- CONTRACTOR SHALL GUARANTEE ALL PLANTINGS FOR ONE YEAR FROM COMPLETION OF WORK. REPLACEMENT PLANTS AND LABOR SHALL BE PROVIDED AT CONTRACTORS' EXPENSE.
- 4. PRUNE ONLY AS DIRECTED BY LANDSCAPE ARCHITECT. PLANTS SHALL NOT HAVE A SHEARED APPEARANCE.
- 5. ALL PLANT MATERIAL IS TO CONFORM TO THE LATEST EDITION OF AMERICAN STANDARDS FOR NURSERY STOCK.
- 6. LANDSCAPE ARCHITECT RESERVES THE RIGHT TO REJECT ANY PLANT MATERIAL
- 7. CONTRACTOR IS RESPONSIBLE FOR THE LOCATION AND IDENTIFICATION OF ALL UTILITIES. ANY UTILITIES DAMAGED BY THE CONTRACTOR SHALL BE REPAIRED AT THE CONTRACTOR'S COST.
- 8. ALL DEMOLISHED MATERIALS AND TRASH ARE TO BE REMOVED FROM THE SITE AND DISPOSED OF PROPERLY. HARDSCAPE AREAS ARE TO BE PRESSURE WASHED TO ACHIEVE A CLEAN FINISHED APPEARANCE.
- 9. ALL PLANTING BEDS ARE TO BE CLEANED OF ROCKS AND DEBRIS >1", TILLED TO 12" DEPTH AND AMENDED WITH 3" OF NATURES HELPER (OR APPROVED EQUAL), THEN THOROUGHLY TILLED TOGETHER.
- 10. ANY REMAINING DISTURBED AREAS, NON-PLANTING OR MEADOW, ARE TO BE FINE GRADED AND SEEDED WITH FESCUE BLEND (SEE SCHEDULE, THIS PAGE)
- 11. PRIOR TO INSTALLATION, CONTRACTOR SHALL REVIEW PLANT AND LIGHT LOCATIONS WITH LANDSCAPE ARCHITECT TO ELIMINATE CONFLICTS. ON SHEET L1.
- 12. ALL EXISTING AND PROPOSED TREES NOT CONTAINED WITHIN A MULCHED BED ARE TO RECEIVE A 5' DIAMETER CIRCLE OF MULCH.
- 13. LANDSCAPE ARCHITECT WILL FIELD PLACE ALL PLANT MATERIALS.
- 14. REPORT ANY POORLY DRAINED SOILS OR ANY DRAINAGE PROBLEMS TO LANDSCAPE ARCHITECT IMMEDIATELY. FAILURE TO REPORT SUCH CONDITIONS WILL RESULT IN THE CONTRACTOR BEING RESPONSIBLE FOR CORRECTING THE PROBLEM AND REPLACING DAMAGED OR LOST PLANTS.
- 15. LAWN AREAS TO BE SEEDED SHALL BE TILLED TO A MIN. 4" DEPTH (EXCEPT WITHIN THE DRIPLINE OF EXISTING TREES TO REMAIN.) SEE SEEDING SCHEDULES, THIS PAGE, FOR SEEDING AND FERTILIZATION RATES.


#### TREE PROTECTION NOTES

- 1. ALL TREES, UNDERSTORY AND OTHER VEGETATION TO REMAIN SHALL BE PROTECTED FROM INJURY DURING ANY LAND CLEARING AND CONSTRUCTION
- 2. THE CONTRACTOR SHALL NOT PARK VEHICLES, STORE MATERIALS OR TRENCH WITHIN THE DRIPLINE OF TREES TO REMAIN, OR WITHIN BARRIERS PROTECTING ANY VEGETATION TO REMAIN.
- 3. THE CONTRACTOR SHALL NOT CAUSE OR ALLOW THE CLEANING OF EQUIPMENT, STORAGE OR DISPOSAL OF MATERIALS SUCH AS PAINTS. SOLVENTS, ASPHALT, CONCRETE, OR ANY MATERIAL THAT CAN DAMAGE THE HEALTH OF VEGETATION WITHIN THE DRIPLINE OF PROTECTED VEGETATION.
- 4. NO ATTACHMENT OF WIRES (EXCLUSIVE OF PROTECTIVE GUIDE WIRES) SIGNS, OR PERMITS SHALL BE FASTENED TO PROTECTED VEGETATION.
- 5. A TEMPORARY BARRIER SHALL BE INSTALLED PER PLAN OR AS DIRECTED BY THE LANDSCAPE ARCHITECT. THE BARRIERS SHALL REMAIN THROUGHOUT THE ENTIRE CONSTRUCTION PROCESS.
- 6. ALL CLEARING AND GRUBBING WITHIN AREAS OF VEGETATION TO REMAIN SHALL BE DONE WITH HAND TOOLS ONLY AND UNDER THE DIRECTION OF THE LANDSCAPE ARCHITECT.



Westmore Design, PA



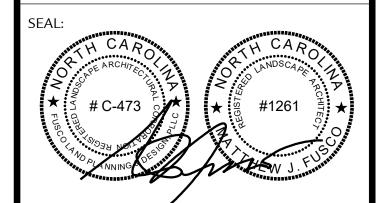

DRAWN BY: NAT

**CHECKED BY:** MJF

Ż W

8

SIGN, 8 PLANNING

LAND WEILI 414 VANDEDE FUSCO

ISSUE DATE: 09/09/2021

Date Revision / Issue


Copyright © 2018, Fusco Land Planning & Design, PLLC


SHEET TITLE:

Landscape Schedule, Notes, Specs & Details

SHEET NO:

L6.01

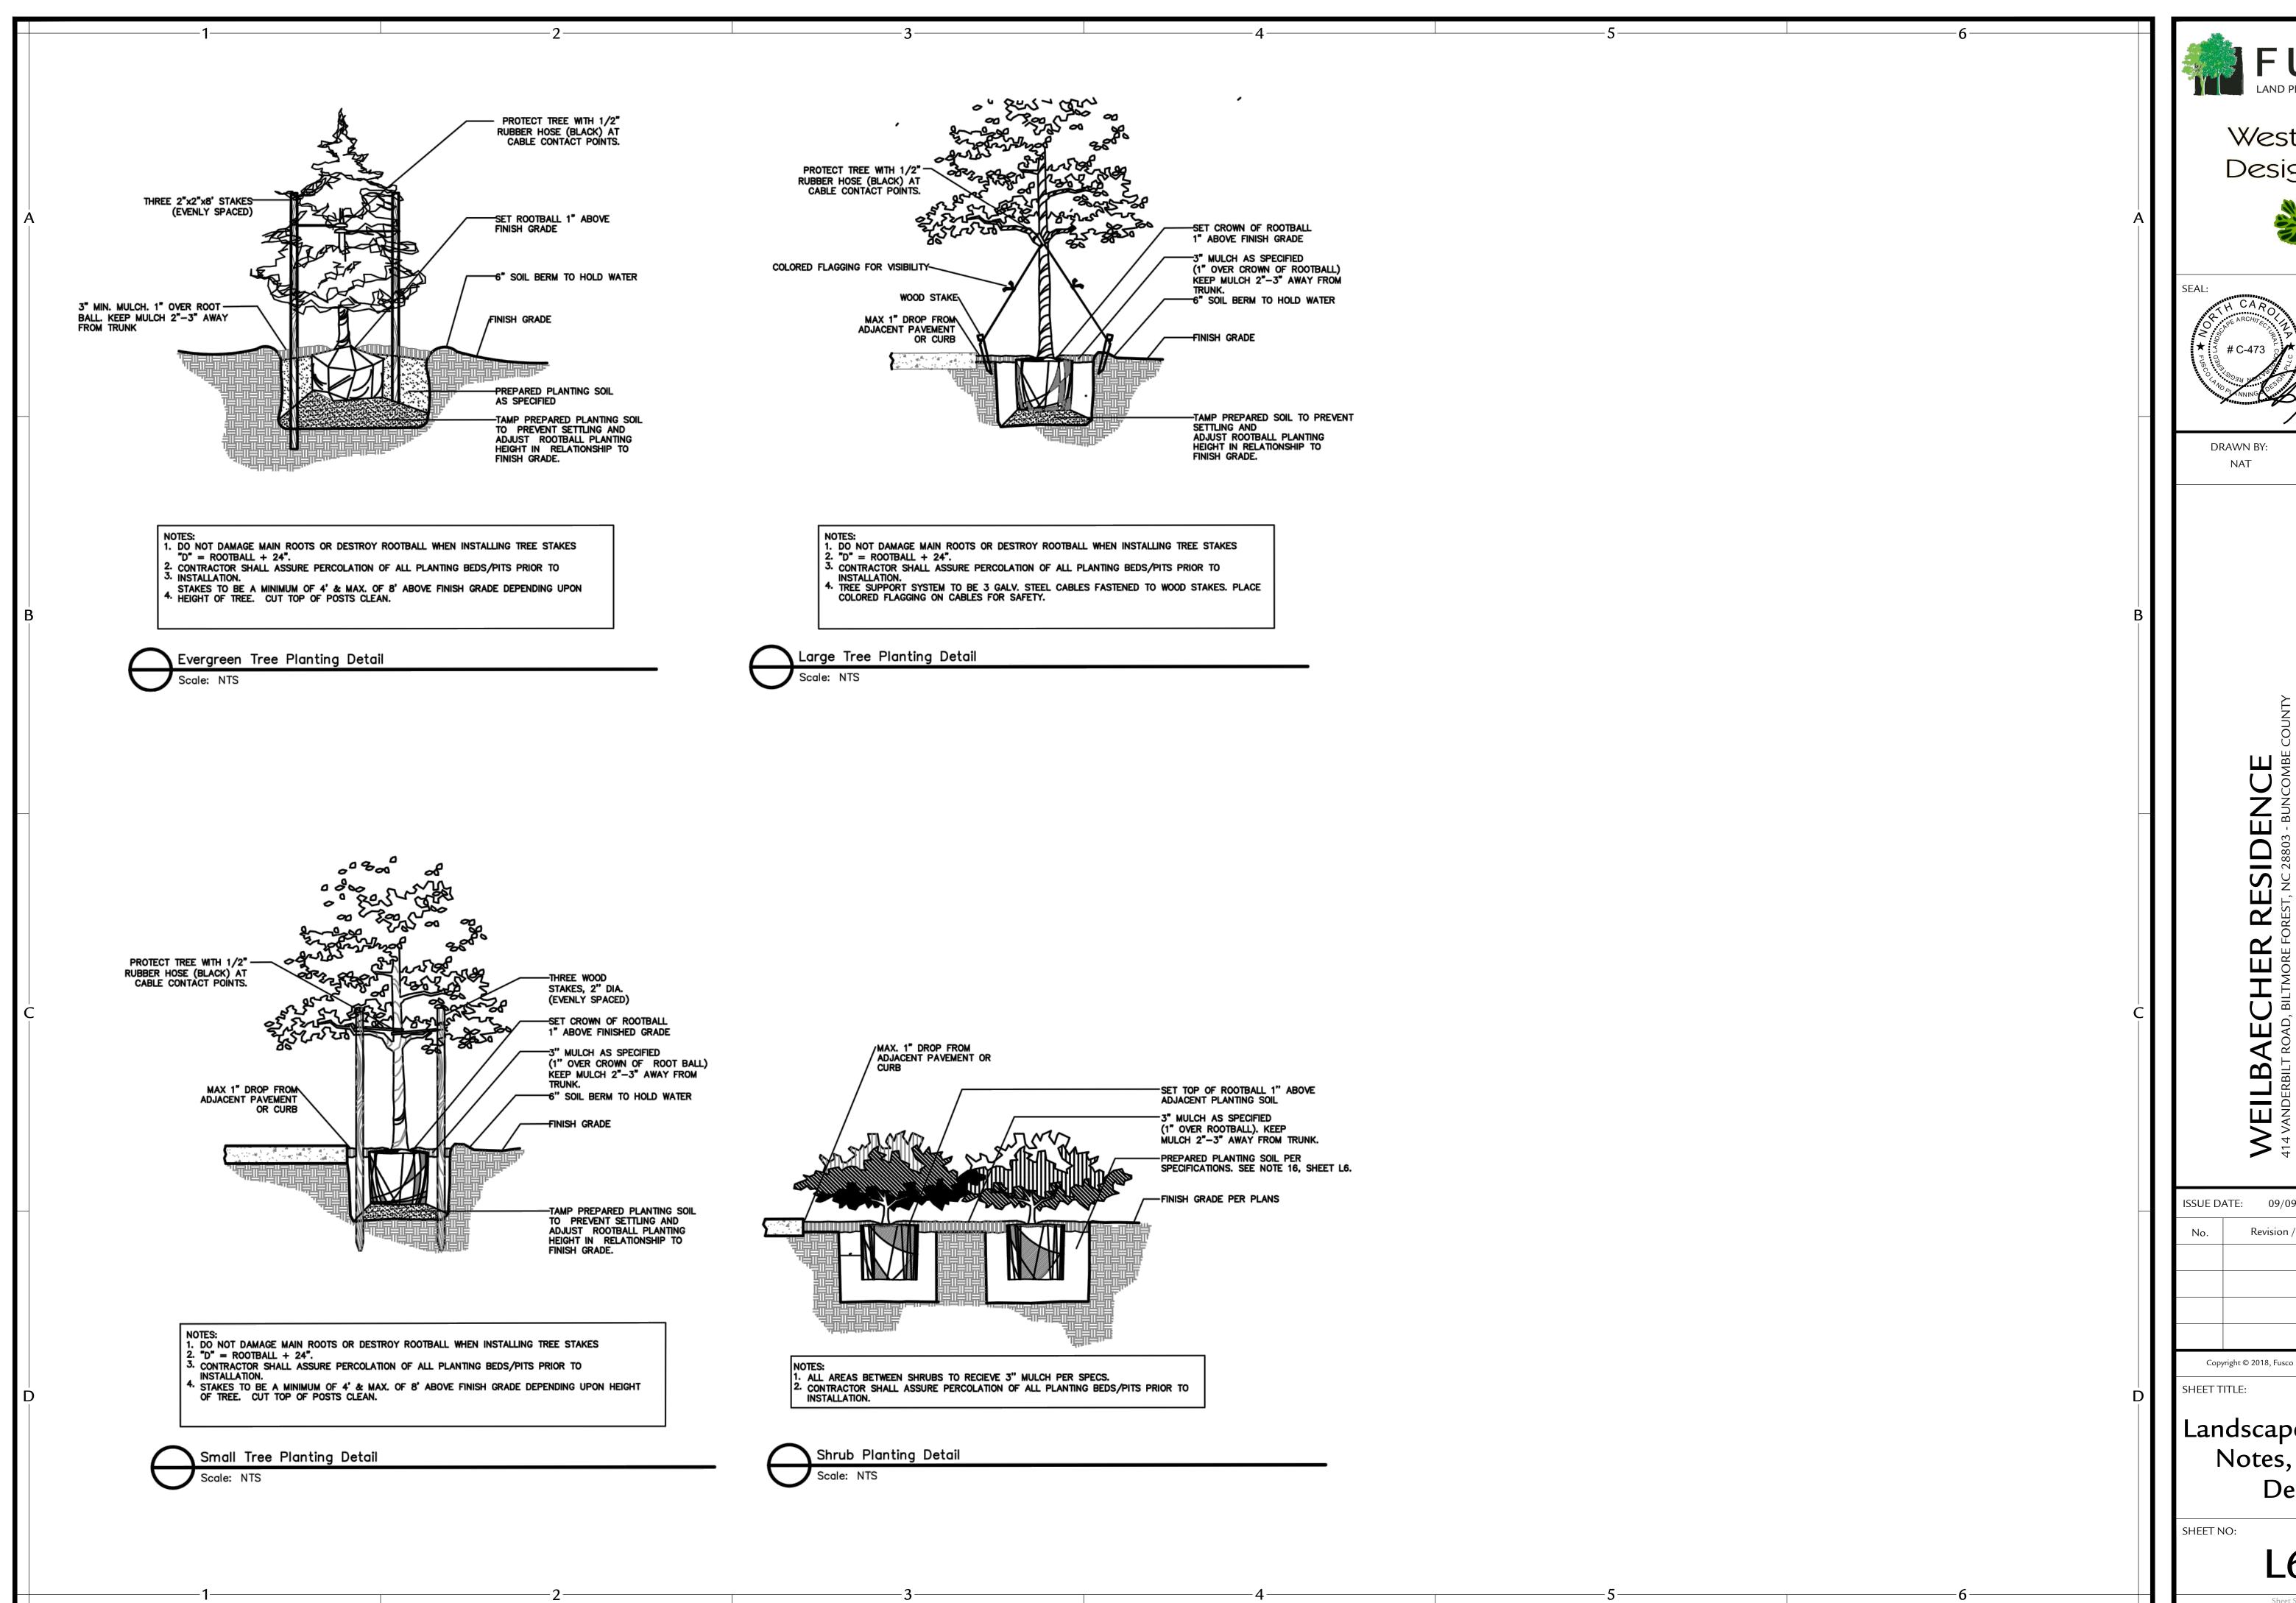

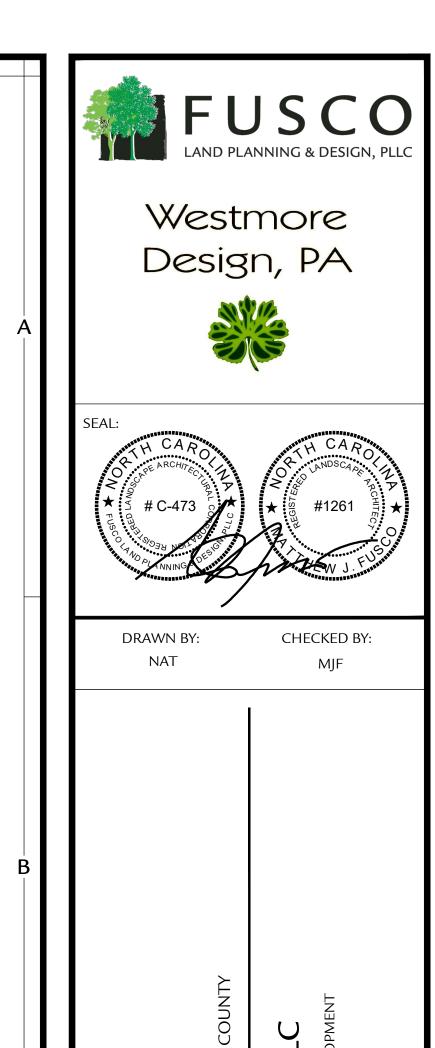

SIDENCE NC 28803 - BUNCOMBE WEILI 414 VANDEPP

DE

8

FUSCO

ISSUE DATE: 09/09/2021 Date Revision / Issue

Copyright © 2018, Fusco Land Planning & Design, PLLC

Landscape Schedule, Notes, Specs & Details

L6.02

# JOEL KELLY DESIGN

## WEILBAECHER RESIDENCE

414 Vanderbilt Rd. Ashville, NC 28803 NEW CONSTRUCTION

## PROJECT INFORMATION

APPLICABLE CODES

RESIDENTIAL

2018 NORTH CAROLINA STATE BUILDING CODE: RESIDENTIAL CODE

2017 NFPA NATIONAL ELECTRIC CODE

## **ZONING ANALYSIS**

ZONING DISTRICT: TOWN OF BILTMORE FOREST PIN(s): PLAT: 5948/0296 DEED REFERENCE: ADJOINER ZONING: FRONT SETBACK: SIDE SETBACK: REAR SETBACK: RIVER BASIN: FRENCH BROAD TOTAL ACREAGE: 3.01 AC PER TAX RECORDS DISTURBED AREA: 1.34 AC **EXISTING IMPERVIOUS AREA:** 13,524 S.F. (0.31 AC) (10.2%) PROPOSED IMPERVIOUS AREA: 22,480 S.F. (0.52 AC) (17.3%) IMPERVIOUS AREA CHANGE: ADD 7.1% ALLOWABLE IMPERVIOUS SURFACE AREA (20% OF LOT AREA): 26,223 S.F. (0.60 AC)

## **BUILDING ANALYSIS**

PROPOSED HEATED AREA

LEVEL 0: 2,225 S.F.

LEVEL 1: 5,477 S.F.

LEVEL 2: 2,445 S.F.

PROPOSED UNHEATED AREA LEVEL 0: 866 S.F.

LEVEL 1: 1,364 S.F. LEVEL 2: 0 S.F.

PROPOSED MAX BUILDING HEIGHT: 38'-6'

AVERAGE BUILDING HEIGHT: 38'-4"

PROPOSED ROOF AREA: 8,144 S.F.

ALLOWABLE ROOF AREA

(3.0-3.5 ACRES): 8,200 S.F.

## PROJECT SCOPE

THE SCOPE OF WORK SHALL INCLUDE THE REMOVAL OF THE EXISTING HOUSE AND CONSTRUCTION OF THE PROPOSED HOUSE AS OUTLINED IN THE FOLLOWING CONSTRUCTION DOCUMENTS

## DESIGN PACKAGE

TABLE OF CONTENTS

RAWING SHEET TITLE

LANDSCAPE - ATTACHED (BY OTHERS)

#### ARCHITECTURAL

COVER SHEET

A1.0 FLOOR PLAN LEVEL 0

A1.1 FLOOR PLAN LEVEL 1

A1.2 FLOOR PLAN LEVEL 2

A1.3 ROOF PLAN

EXTERIOR ELEVATIONS

A5.1 EXTERIOR ELEVATIONS


A5.2 EXTERIOR ELEVATIONS

A5.3 EXTERIOR ELEVATIONS

A5.4 EXTERIOR ELEVATIONS

## LOCATION

#### VICINITY

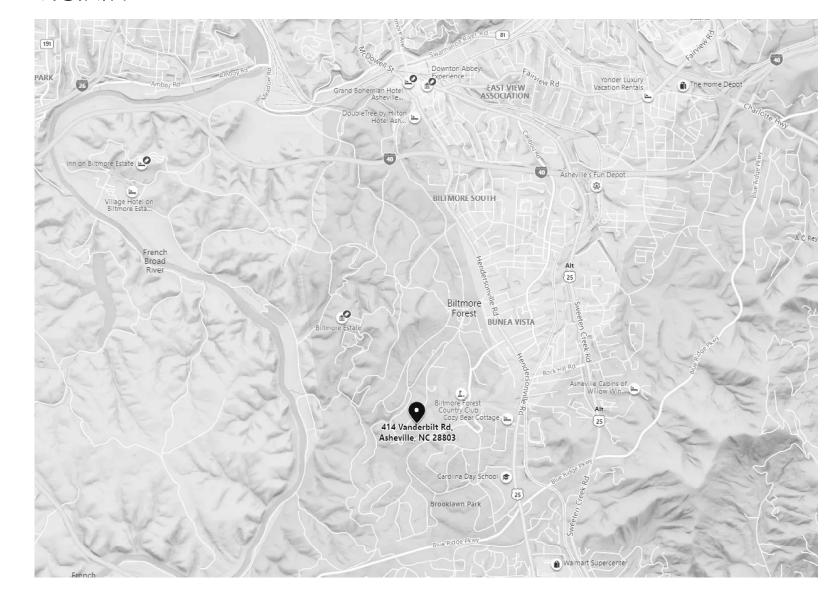

#### STREET



New Construction

Weilbaecher Residence

414 Vanderbilt Road Asheville NC 28803

Prepared for

Derek & Angela Weilbaecher

gner

JOEL KELLY DESIGN

448 E. Paces Ferry Rd. NE Suite 100 Atlanta, Georgia 30305 404-221-0422

www.joelkelly.com

No. Issue Description

12 ZONING APPLICATION


SHEET NAME


COVER SHEET


SHEET NUMBER


08-30-2021

© copyright Joel Kelly Desigr

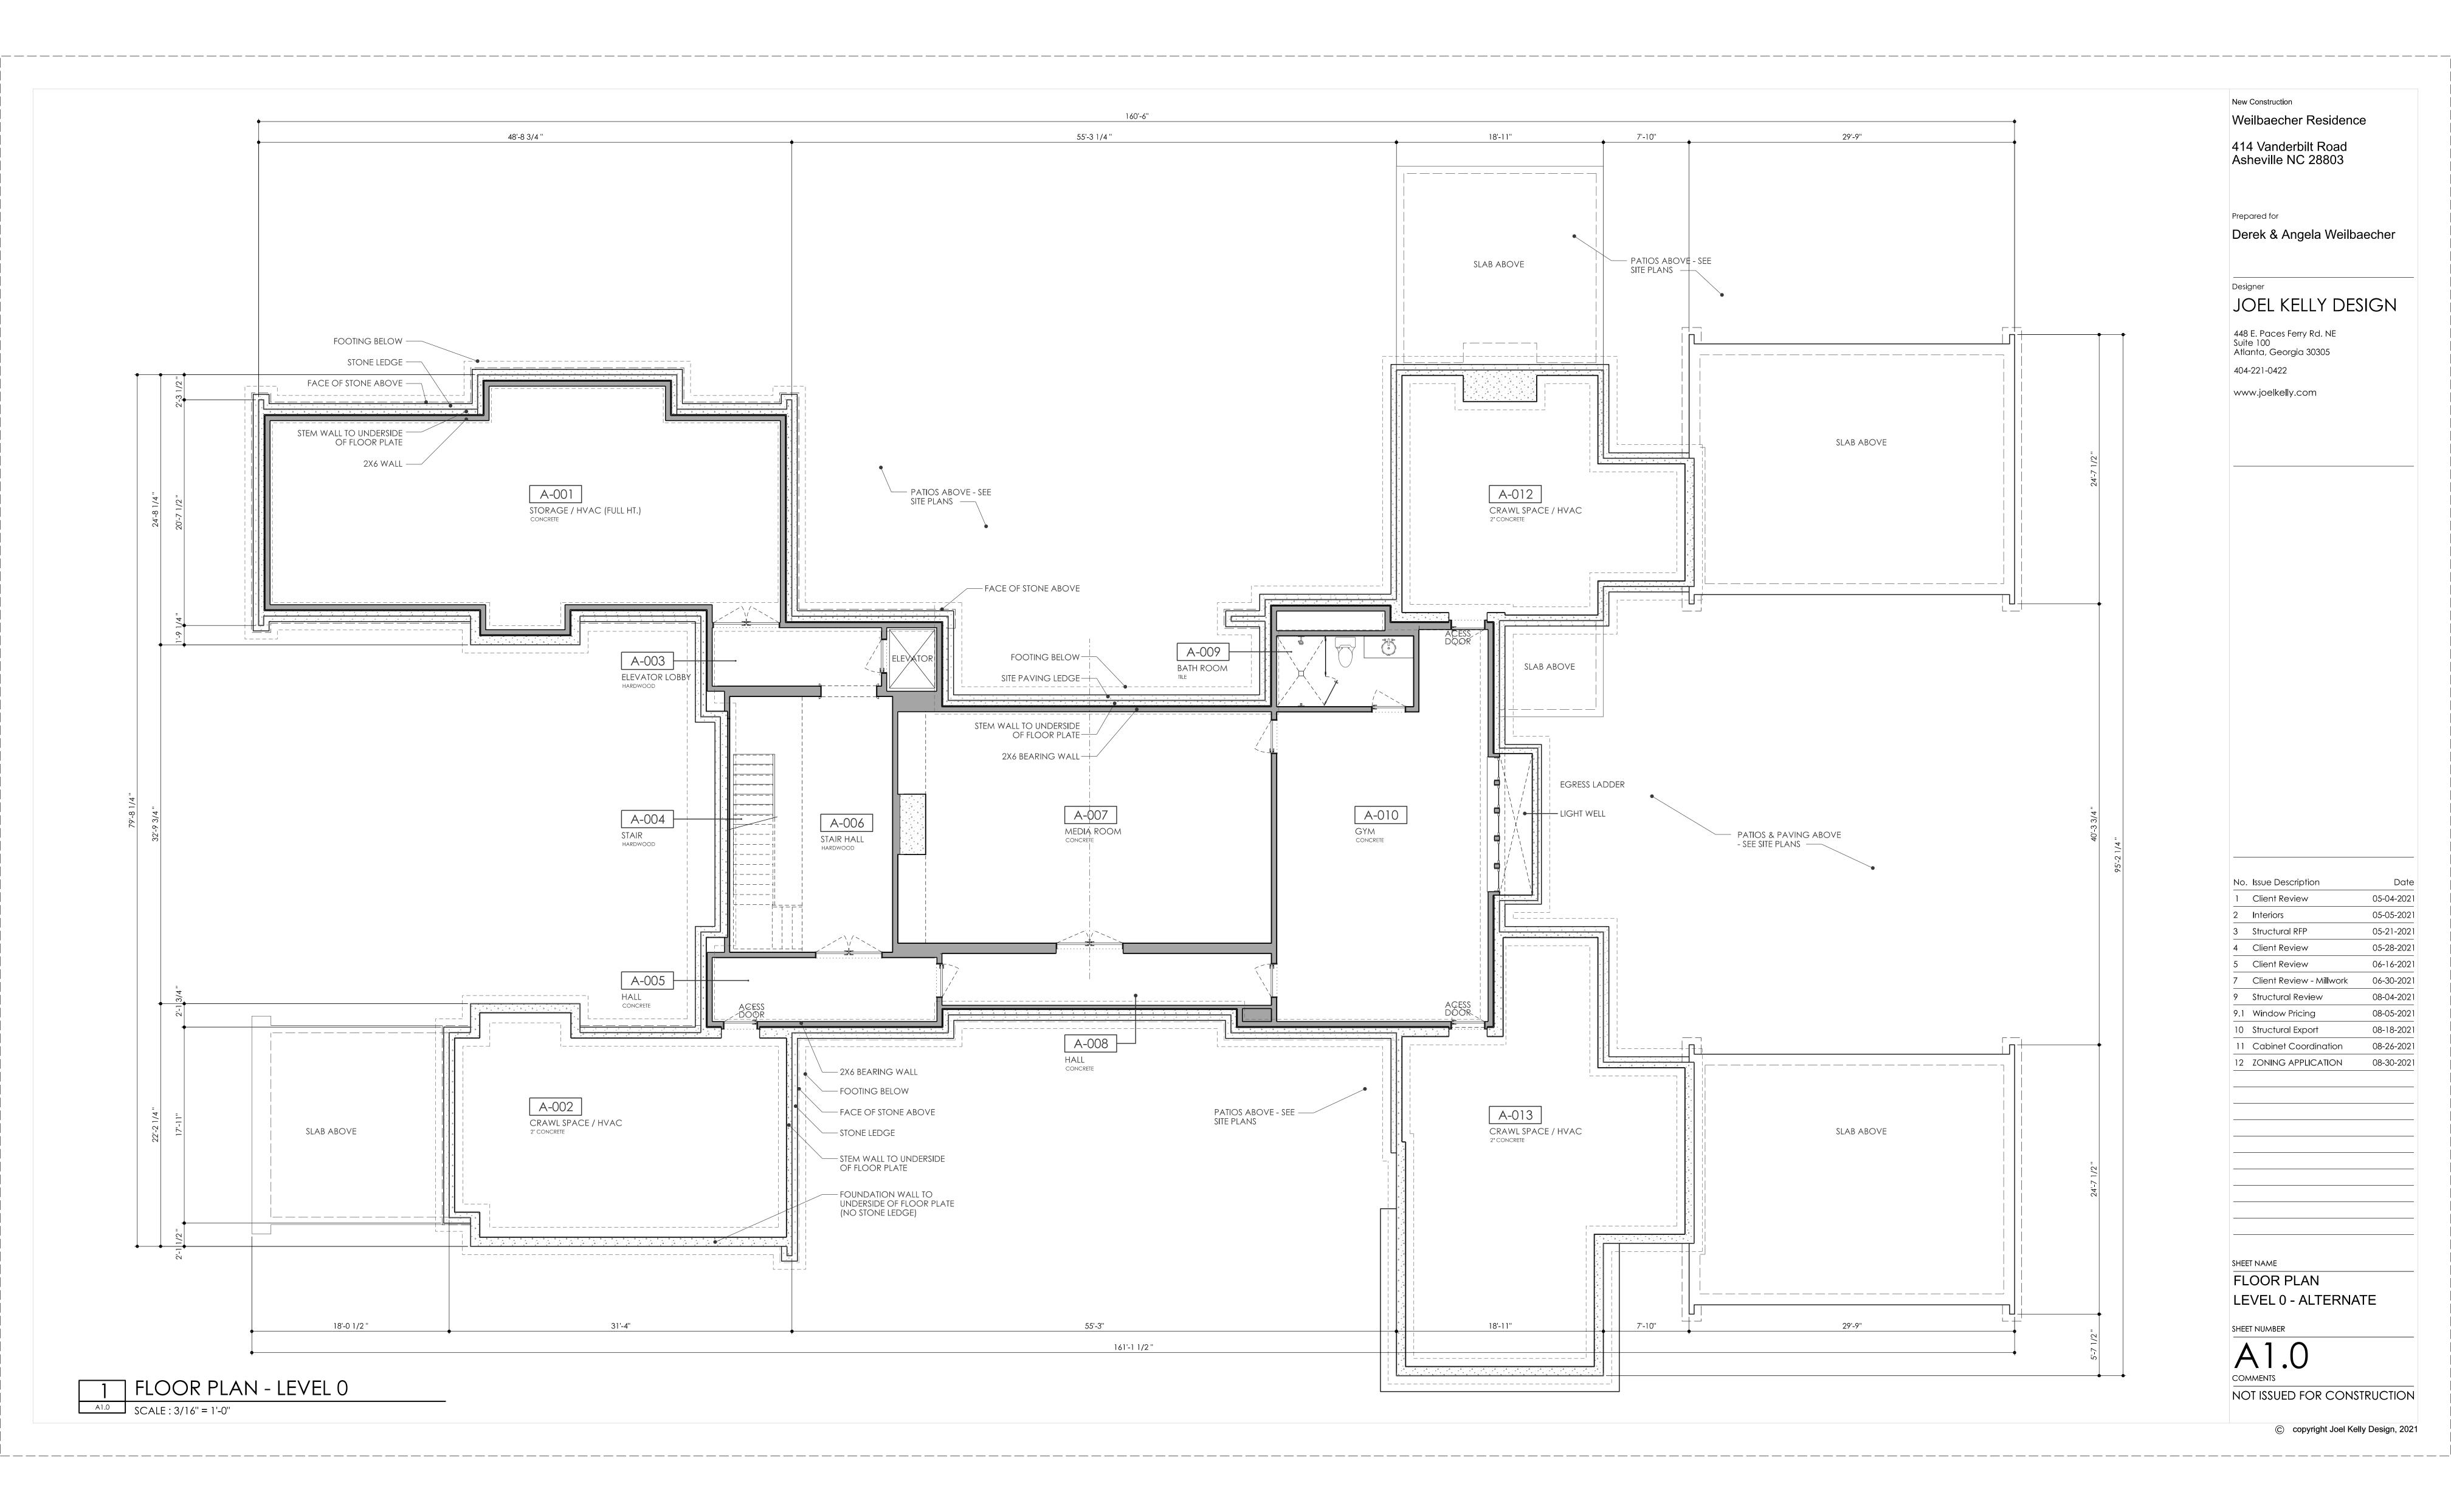

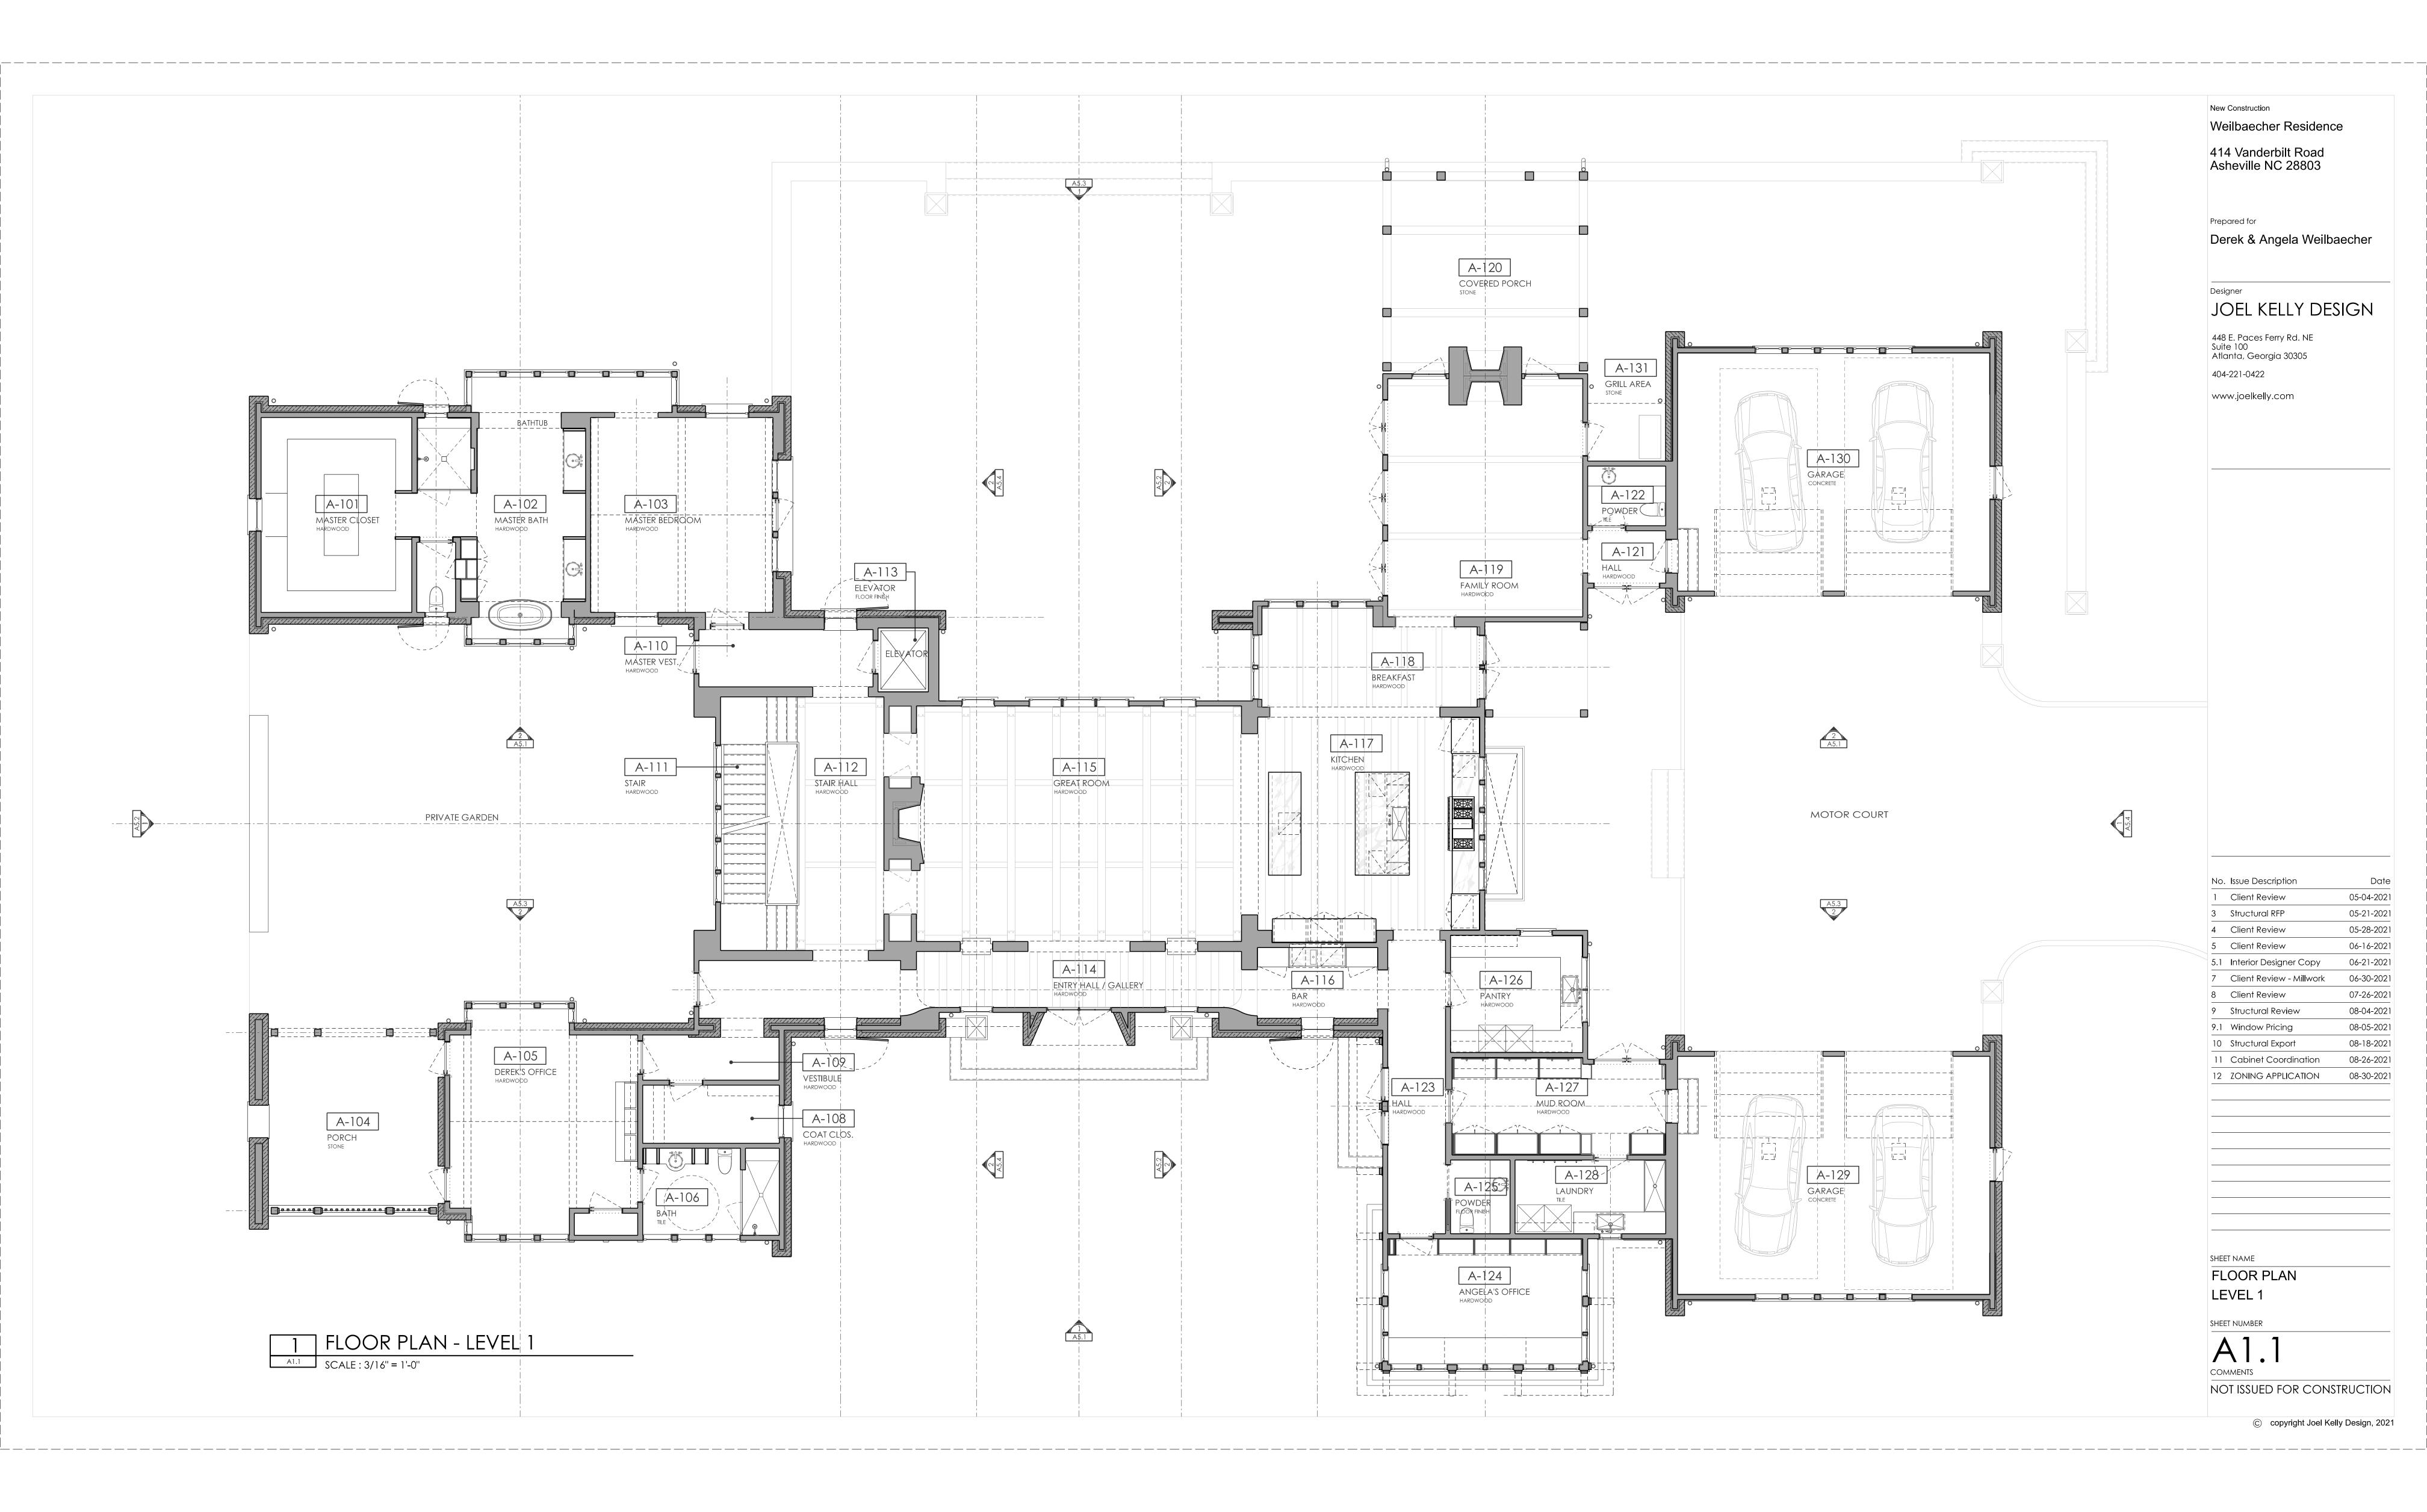

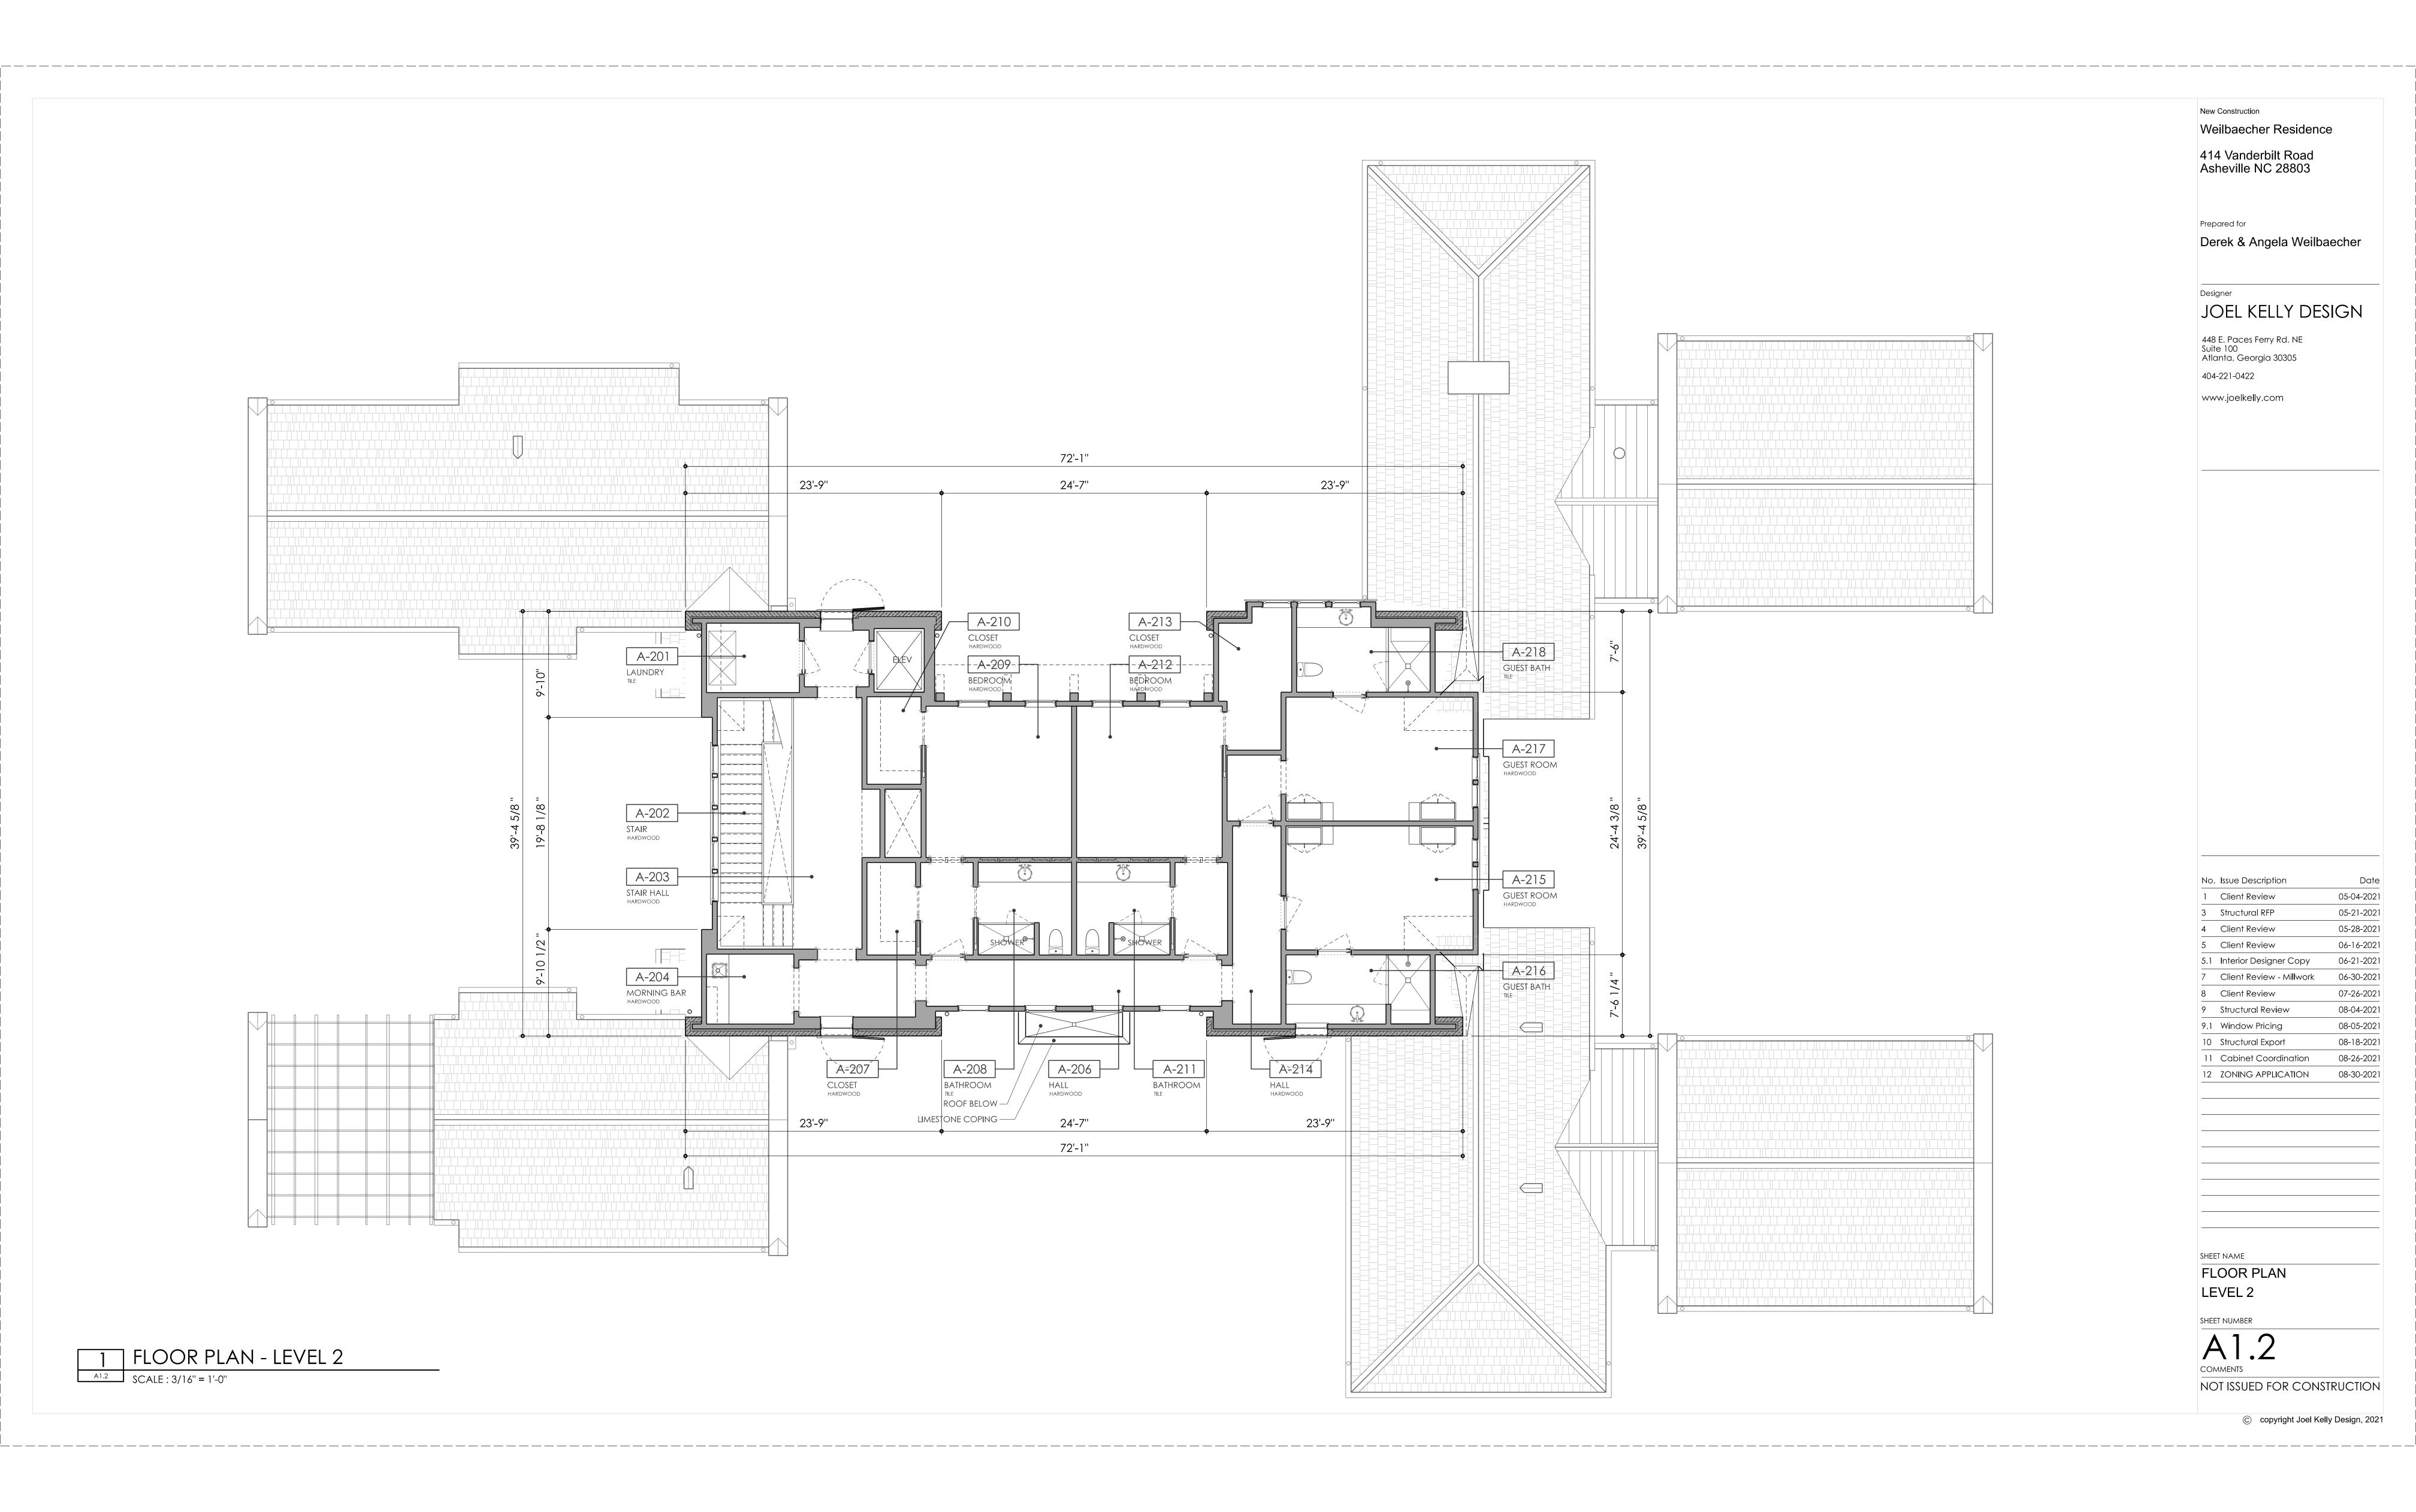


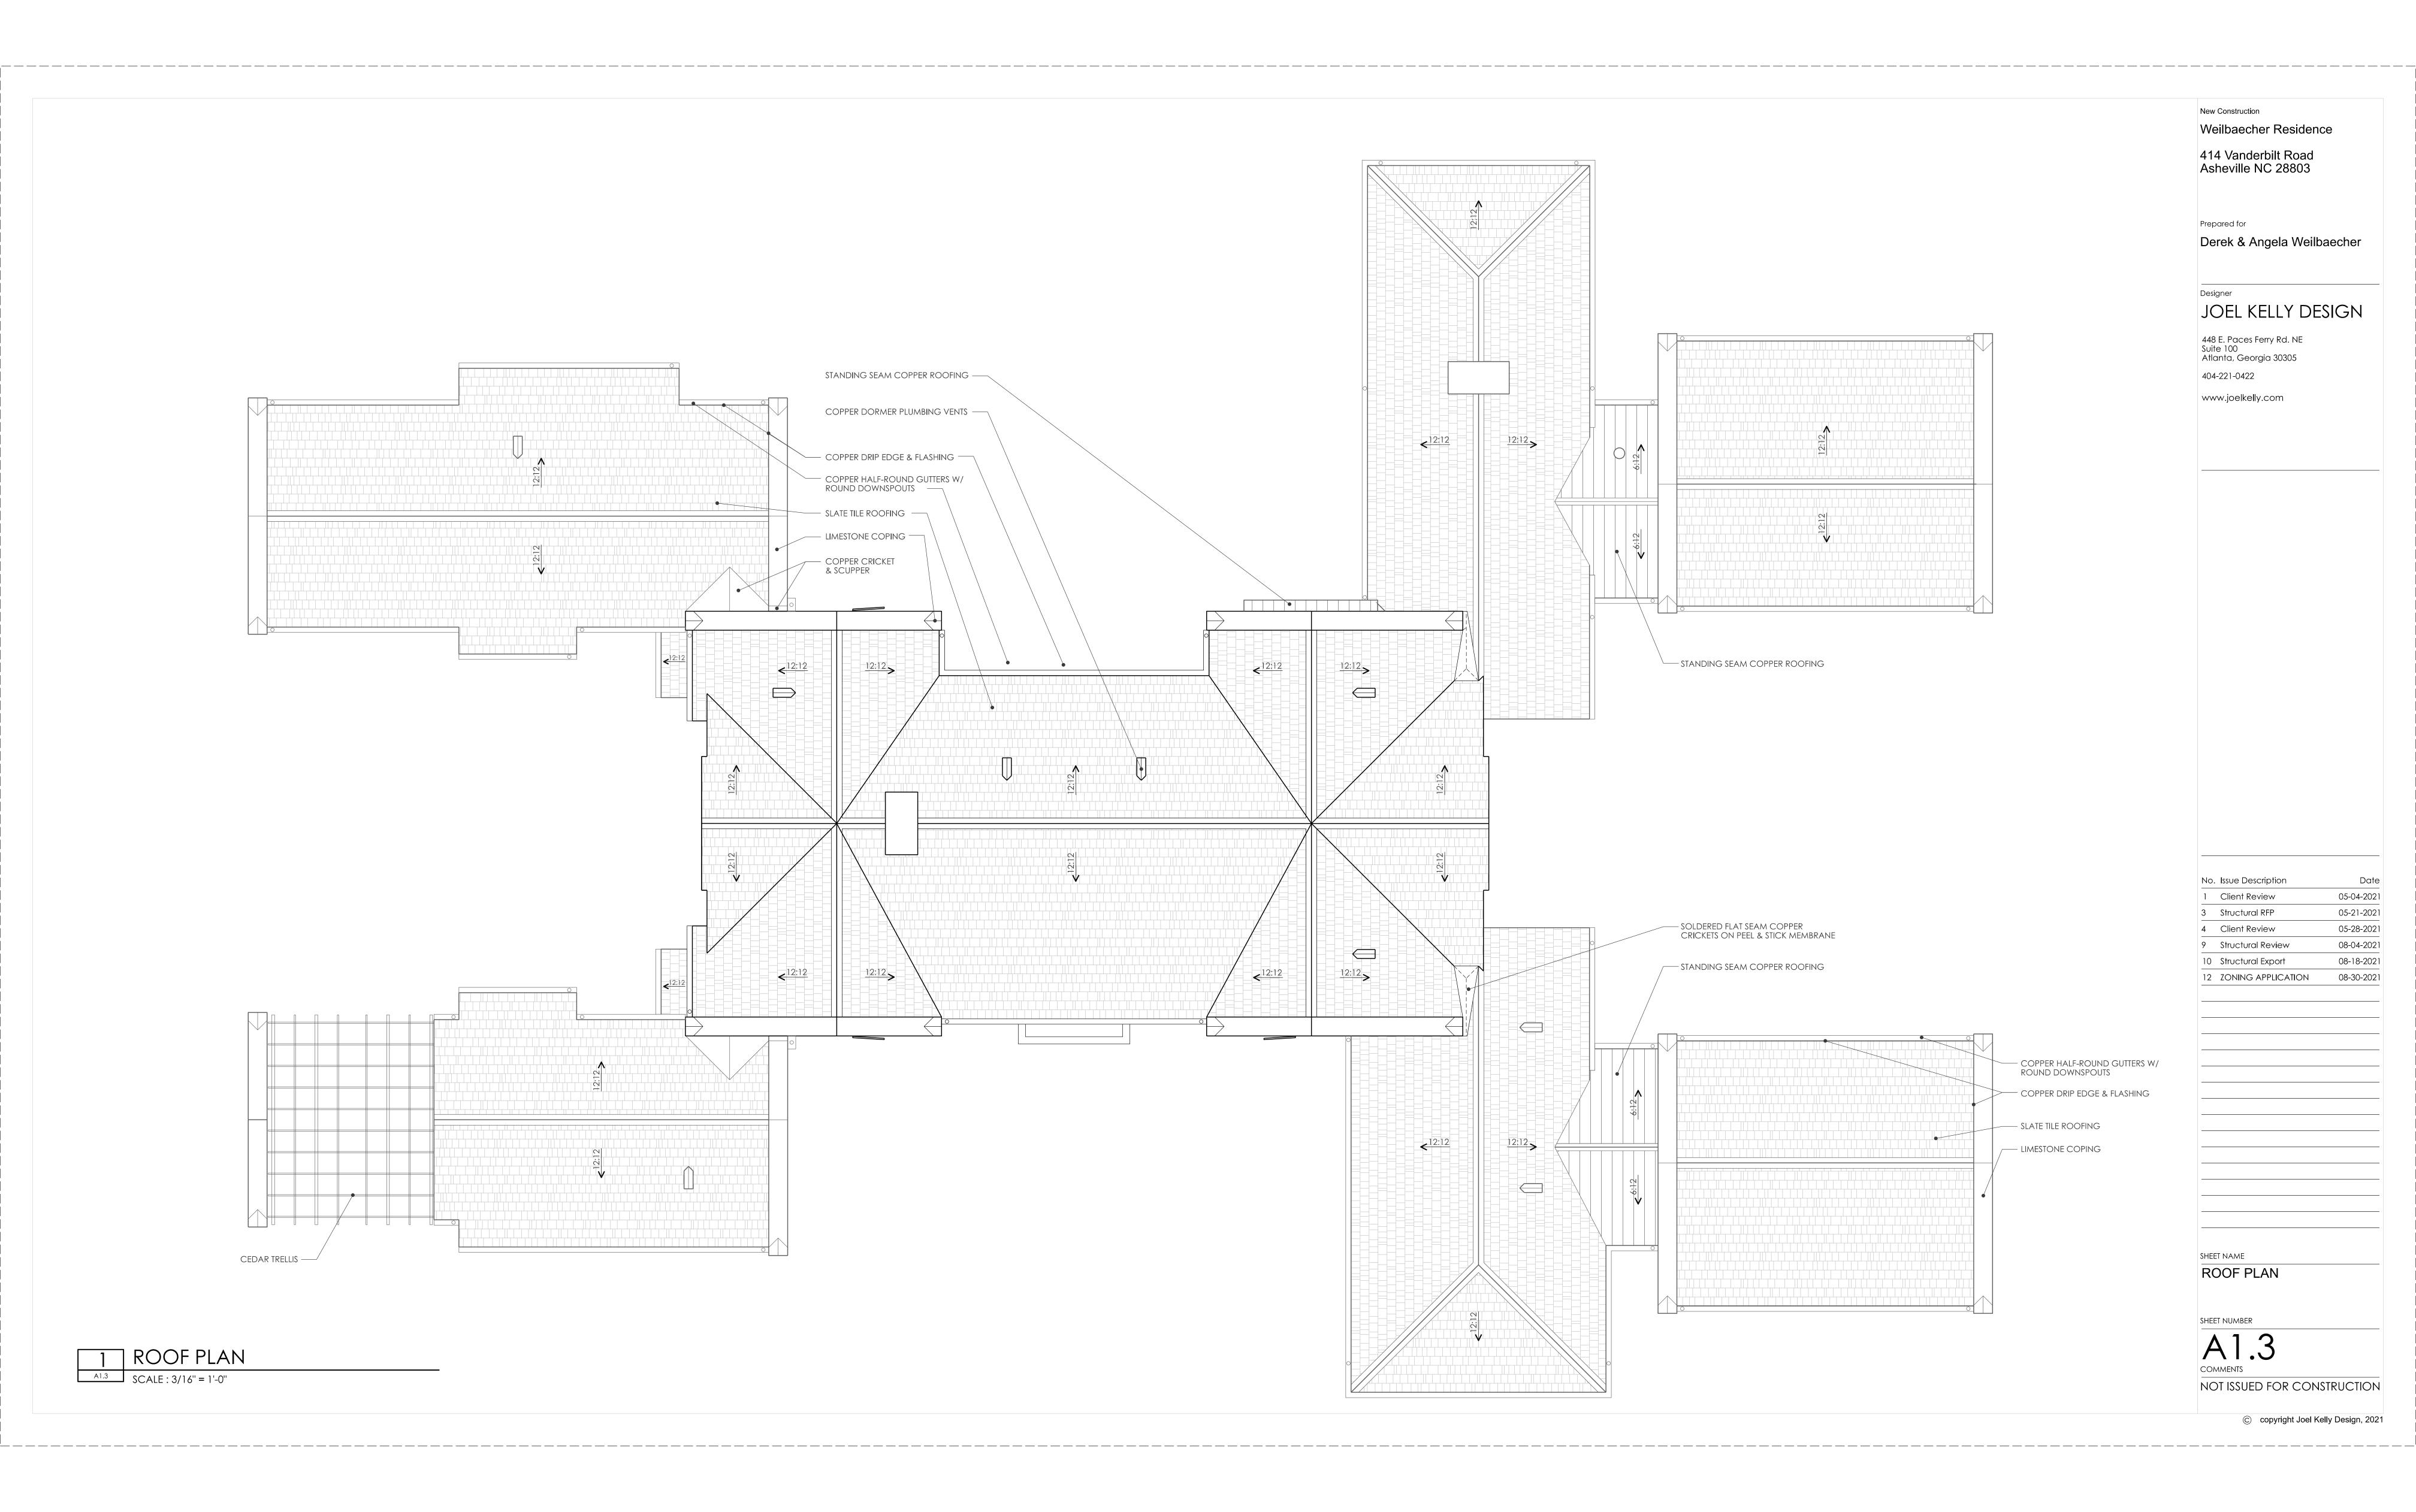







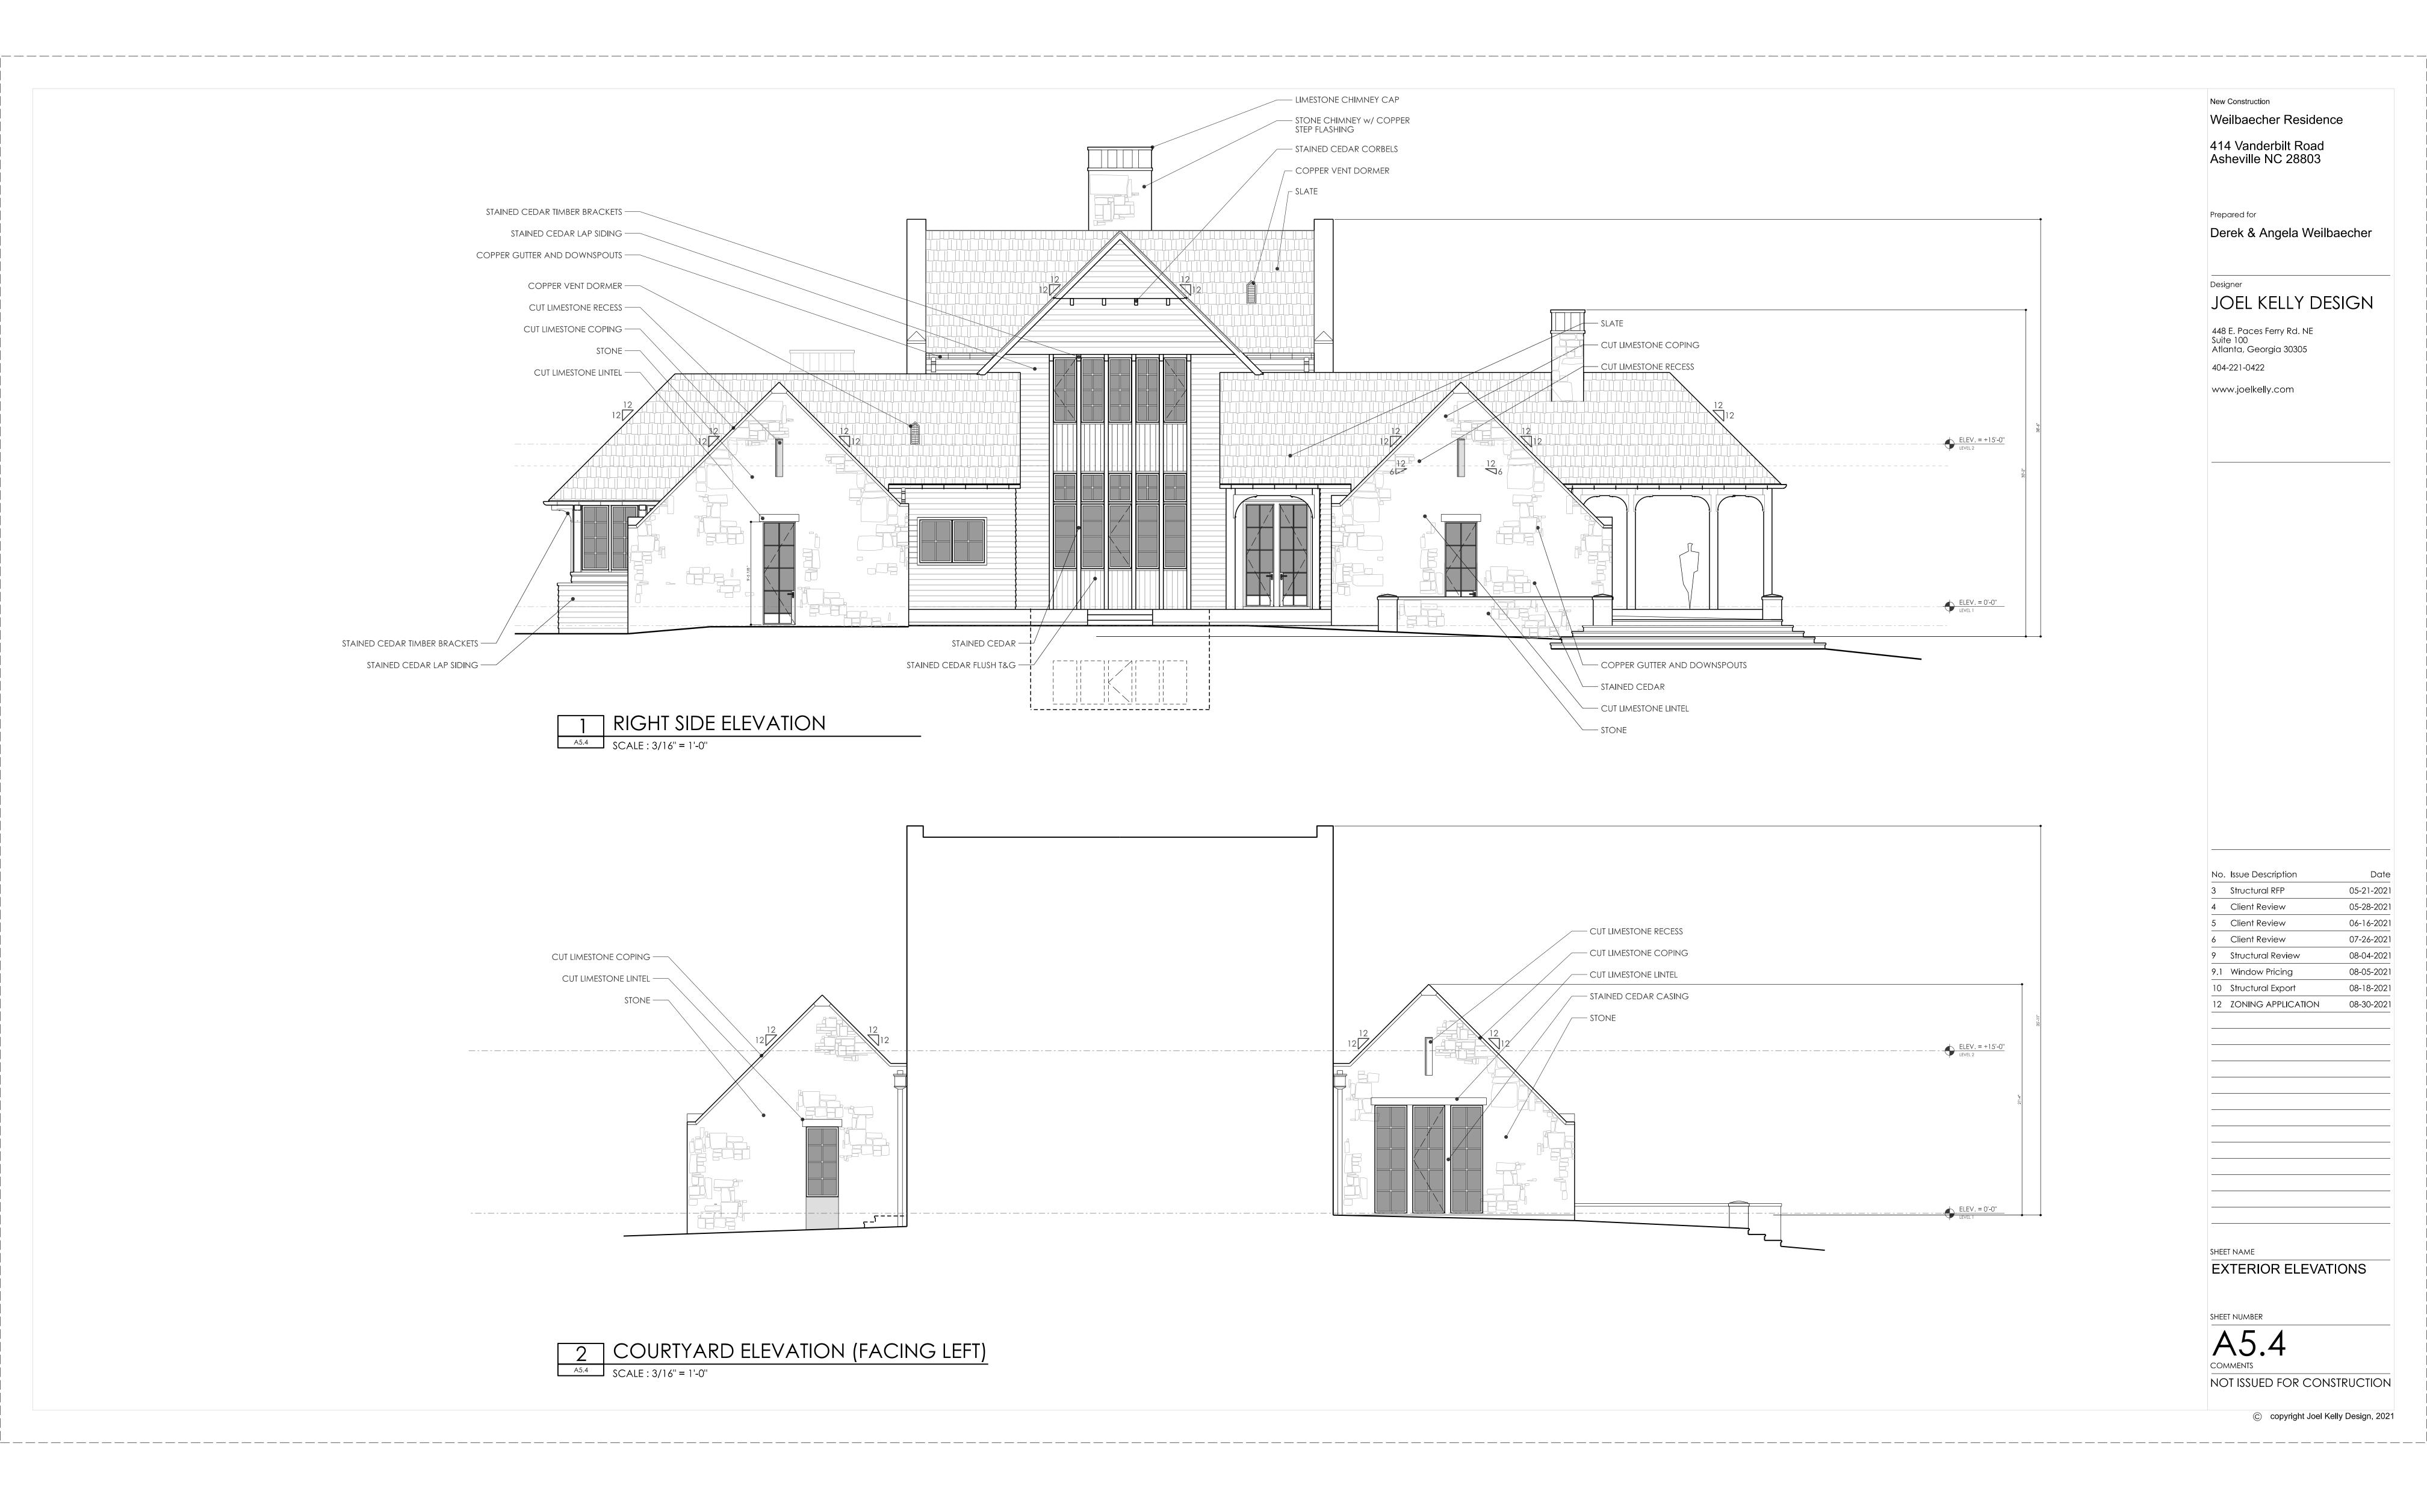



#### **Proposed Exterior Materials for Weilbaecher Residence**

414 Vanderbilt Rd. Biltmore Forest, NC

Example of exterior stone, limestone coping:





#### Example of wood siding:

(Image also shows copper standing seam, cedar shingle roofing alternate):





Example of slate roofing:

